


# Frequency Mixer WIDE BAND

## MCA1-12GL+

Level 4 (LO Power+4 dBm) 3800 to 12000 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ885

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50 mW
IF Current	40 mA
Permanent damage may occur if any of these limits are exceeded.	

### Pin Connections

LO	10
RF	5
IF	3
GROUND	1,2,4,6,7,8,9

### Features

- wide bandwidth, 3800 to 12000 MHz
- high L-R isolation, 32 dB typ.
- IF, DC to 1500 MHz
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

#### Recommended Replacement:

**MAC-12GL+**

- Footprint Compatible
- MIL Level Reliability

[Click here for data sheet](#)

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

#### Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	10, 20, 50, 100, 200
13"	500, 1000

### Applications


- satellite up and down converters
- line of sight links
- defense radar
- defense communication
- federal fixed service

### Electrical Specifications (T<sub>AMB</sub> = -55°C to 100°C)


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF f <sub>c</sub> -f <sub>u</sub>	IF	$\bar{X}$	$\sigma$	Max.	Typ.	Min.	Typ.	Min.	Typ.
3800-12000	DC-1500	6.8	0.2	8.5*	32	17	13	8	9
3800-6500	DC-1500	6.5	0.3	9.2*	38	24	40	23	7
6500-9500	DC-1500	7.0	0.3	—	25	17	26	15	6
9500-12000	DC-1500								

1 dB COMPR. +1 dBm typ.  
\* Conversion loss at 30 MHz IF, increases with IF frequency.

### Outline Drawing

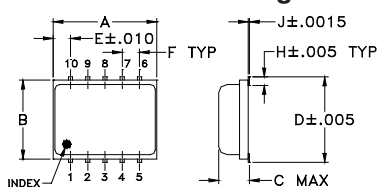

#### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.30	.250	.085	.266	.050	.050	.012
7.62	6.35	2.16	6.76	1.27	1.27	0.30
H	J	K	L	M	wt	
.029	.004	.085	.296	.030	grams	
0.74	0.10	2.16	7.52	0.76	grams	0.25

### Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

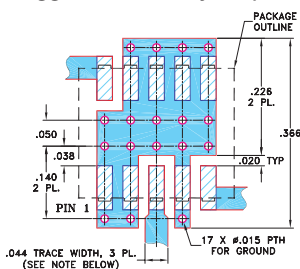

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- ▨ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK


#### Notes









A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Typical Performance Data at 25°C

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
3800.10	3770.10	5.83	31.67	11.75	2.08	2.41
4200.10	4170.10	5.28	33.16	12.89	2.07	2.08
4600.10	4570.10	5.07	30.20	14.54	1.67	2.33
5000.10	4970.10	5.98	30.01	13.24	2.24	1.89
5400.10	5370.10	6.53	21.42	11.36	1.78	2.38
5800.10	5770.10	7.07	22.02	15.36	1.95	2.37
6200.10	6170.10	6.21	28.40	23.67	1.97	3.46
6600.10	6570.10	5.94	39.11	32.57	1.87	3.60
7000.10	6970.10	6.69	48.57	37.06	2.66	3.48
7400.10	7370.10	6.28	39.19	39.61	2.08	3.09
7800.10	7770.10	6.75	35.85	42.58	2.15	3.22
8200.10	8170.10	6.17	36.80	46.61	1.98	3.44
8600.10	8570.10	5.98	35.42	43.55	2.14	2.72
9000.10	8970.10	5.99	33.01	35.36	2.33	2.63
9400.10	9370.10	6.26	32.37	28.27	2.46	2.50
9800.10	9770.10	6.84	32.40	23.97	2.36	4.18
10200.10	10170.10	6.70	31.25	23.95	2.01	3.87
10800.10	10770.10	6.07	26.53	31.09	1.74	3.19
11200.10	11170.10	6.61	24.29	27.16	2.14	2.99
12000.10	11970.10	7.41	21.24	25.82	1.76	2.04

### Electrical Schematic

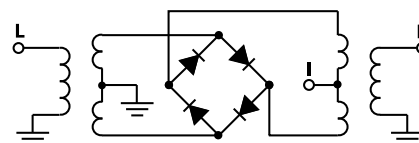

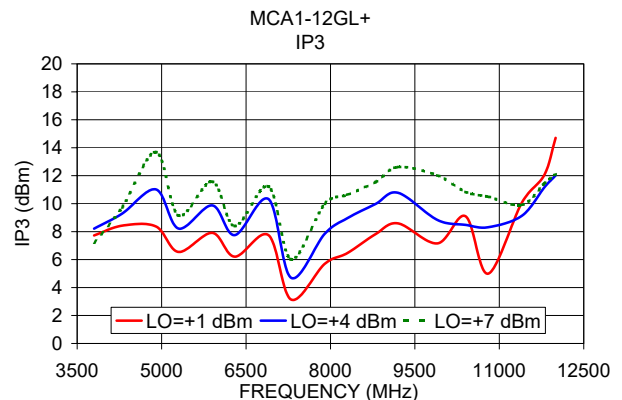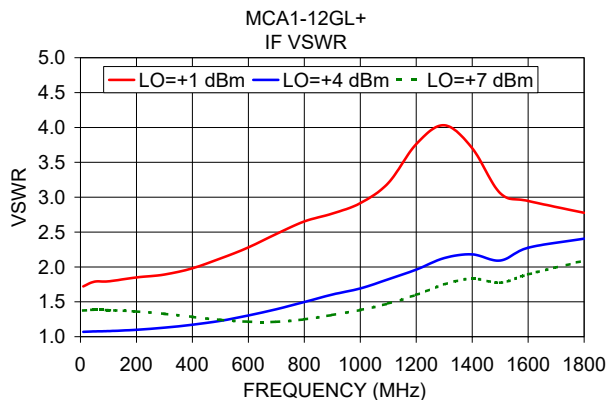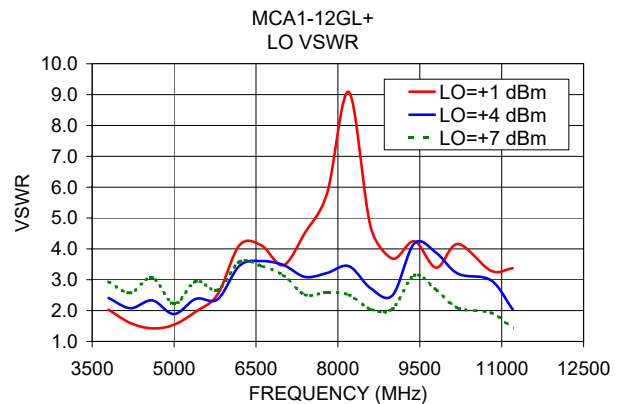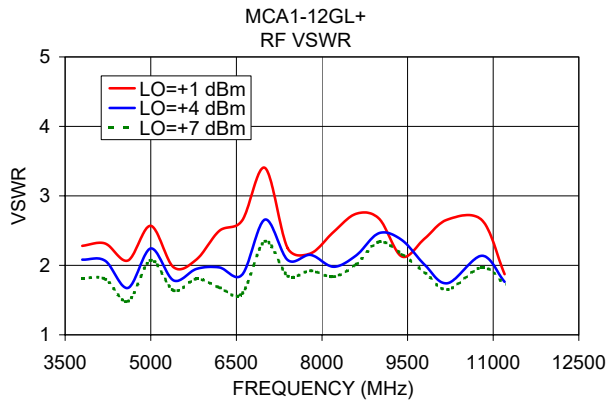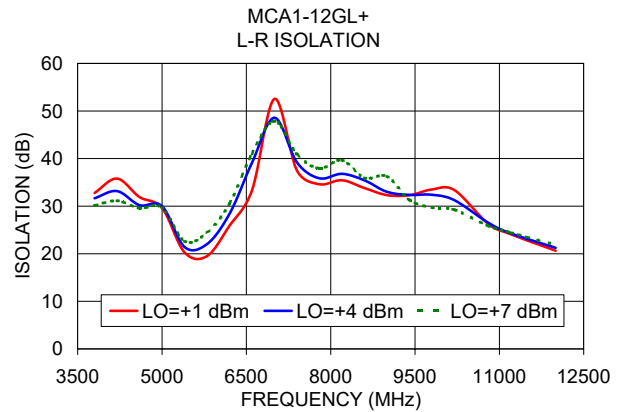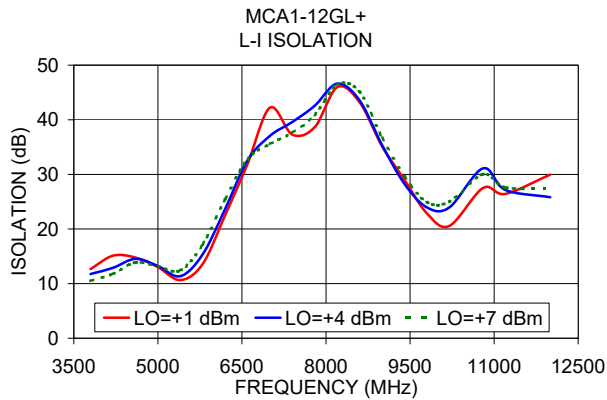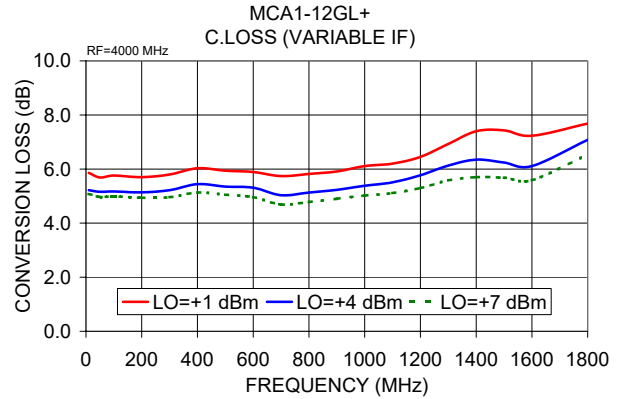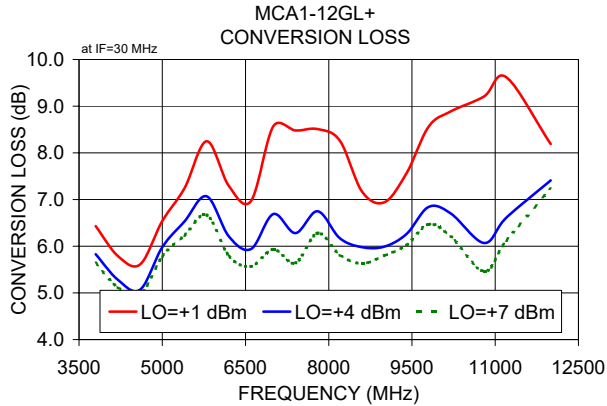

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

