

XV Supercapacitor

Cylindrical snap-in



Features and benefits

- Over 10-year operating life at room temperature
- Ultra low ESR for high power density
- Large capacitance for high energy density
- Long cycle life
- UL Recognized

Applications

- Hybrid battery or fuel cell systems
- High pulse current applications
- UPS / hold up power

Description

Eaton supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to specific applications that range from a few microamps for several days to several amps for milliseconds.

Specifications

Capacitance	300 F to 600 F
Working voltage	2.7 V
Surge voltage	2.85 V
Capacitance tolerance	-5% to +10%
Operating temperature range	-40 °C to +65 °C
Extended operating temperature range	-40 °C to +85 °C (with voltage derating to 2.3 V @ +85 °C)

Standard Product¹

Capacitance (F)	Part Number	Max. initial DC ESR (mΩ) (Equivalent Series Resistance)	Max continuous current ² (A)	Peak current ³ (A)	Max leakage current ⁴ (mA)	Max power ⁵ (W)	Stored energy ⁶ (Wh)	Typical mass (g)
300	XV3550-2R7307-R	4.5	20	160	0.60	410	0.30	62
400	XV3560-2R7407-R	3.2	26	220	0.85	570	0.41	72
600	XV3585-2R7607-R	2.6	33	320	1.30	790	0.60	108

1. Capacitance, ESR and Leakage current are all measured according to IEC 62391-1 at +20 °C

2. 15 °C Temperature Rise

3. Peak Current is for 1 second = $1/2 \text{ Working Voltage} \times \text{Capacitance} / (1 + \text{DC ESR} \times \text{Capacitance})$

4. Leakage current measured after 72 hours, +20 °C

5. Max. Power = $\text{Working Voltage}^2 / 4 / \text{DC ESR}$


6. Stored energy = $1/2 \text{ Capacitance} \times \text{Working Voltage}^2 / 3600$

Performance

Parameter		Capacitance Change (% of initial value)	ESR (% of max. initial value)
Life			
@ Max. operating voltage and temp)	1500 hours	≤ 20%	≤ 200%
Charge/discharge cycling ¹	500,000	≤ 20%	≤ 200%
Storage Life- uncharged			
-40 °C to +65 °C	1500 hours	≤ 20%	≤ 200%
≤ 30 °C	3 years	≤ 5%	≤ 10%

1. Cycling between max operating and 50% of max operating voltage at room temperature

Dimensions (mm)

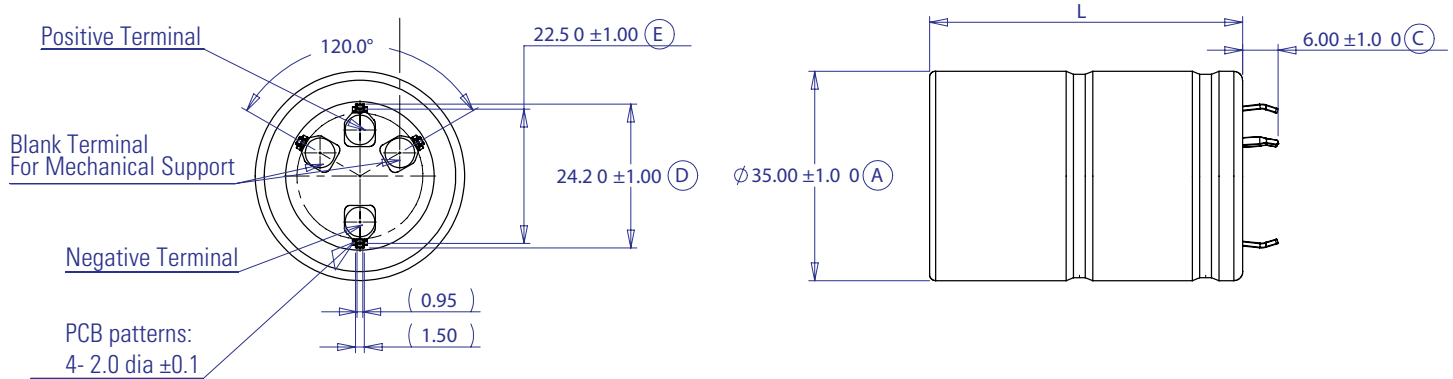

Part Number	L ± 1.0
XV3550-2R7307-R	53
XV3560-2R7407-R	63
XV3585-2R7607-R	87.5

Part Numbering System

XV	3560	-	2R7	40	7	-R
Family Code	Size reference- mm Diameter Length		Voltage (V) R = Decimal	Capacitance (µF)		Standard product
				Value	Multiplier	
XV = Family Code	35 60		2R7= 2.7 V	Example: 407= 40 x 10 ⁷ µF or 400 F		

Packaging Information

- Standard packaging: 20 pieces per box

Part Marking

- Manufacturer
- Capacitance (F)
- Max operating voltage (V)
- Series code (or part number)
- Polarity