


Flyback Transformer

For Analog Devices ADP1031
Isolated Micropower
Management Unit

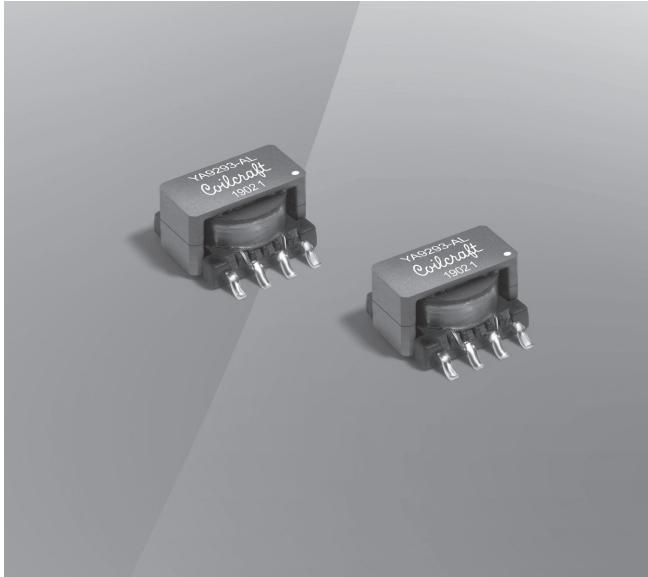

- Developed to use with isolated flyback DC-DC regulator in the Analog Devices ADP1031.
- 2250 Vrms, one minute isolation from primary to secondary
- AEC-Q200 Grade 1 qualified (−40°C to +125°C ambient)

Core material Ferrite

Terminations RoHS tin-silver-copper (95.5/3.8/0.7) over tin over nickel over phos bronze.

Weight 0.99 g

Ambient temperature −40°C to +125°C

Maximum part temperature +165°C

Storage temperature Component: −40°C to +165°C.

Tape and reel packaging: −40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at

+260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)




38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 600 per reel, 13" reel Plastic tape: 24 mm wide, 0.37 mm thick, 16 mm pocket spacing, 6.11 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).

Part number ¹	Input voltage (V)	Inductance ² ±20% (µH)	Leakage inductance ³ max (µH)	DCR max (Ohms)		Turns ratio pri:sec	Isolation ⁴ (Vrms)	Isat ⁵ (A)	Output
				pri	sec				
YA9293-ALD	4.5 – 60	300	1.62	1.2	0.785	1 : 1	2250	0.25	24 V, 20 mA

- Packaging:** D = 13" machine ready reel. EIA-481 embossed plastic tape.
 - Inductance is for the primary, measured on an Agilent/HP 4284 at 250 kHz, 0.1 Vrms, 0 Adc.
 - Leakage inductance is for the primary with secondary winding shorted together.
 - Isolation (hipot) measured between windings for one minute.
 - DC current that causes an inductance drop of 20% (typ) from its value without current
 - Electrical specifications at 25°C.
- Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

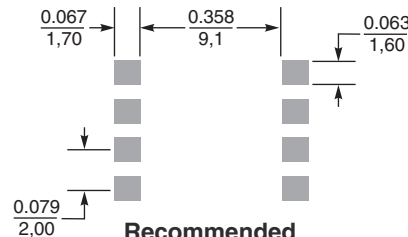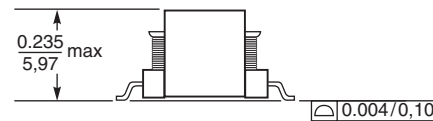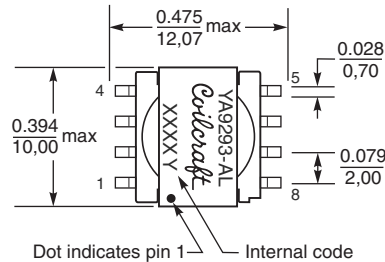

Dimensions are in $\frac{\text{inches}}{\text{mm}}$

Schematic

