


LED FLEX RIBBON

ZFS-SERIES




STANDARD INTENSITY (Economy)




SIDEVIEW




HIGH DENSITY (Tight Pitch)



ADJUSTABLE WHITE



HIGH INTENSITY



ADJUSTABLE RGB COLOR


LED Flex Ribbon - Compatible Dimmers & Controllers:

- | | |
|---------|---|
| ZDM-01 | LED Manual Dimmer |
| ZDM-02 | LED Remote Control Dimmer |
| ZCTR-04 | LED Photo Sensor Switch |
| ZCTR-08 | LED Small Remote Controller |
| ZCTR-06 | LED RGB Controller |
| ZCTR-05 | LED Double-White Controller |
| ZCTR-07 | LED Touch Panel Double-White Controller |




WATER RESISTANT

SAMPLE CONNECTORS

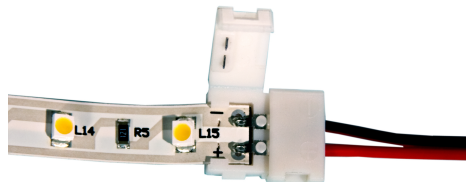


ZFS-CH140-I connector with LED flex

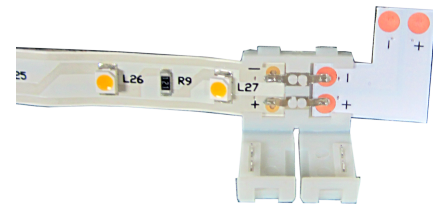


ZFS-CH0-8J & ZFS-CNL-8J connectors with LED flex




ZCH-170-RGB-J



ZFS-CNT-8J



ZFS-CNL-8J



ZFS-CNX-8J



WWW.JKLLAMPS.COM
SALES@JKLLAMPS.COM

800-421-7244

Since 1972

LED FLEX RIBBON - 12VDC

ZFS-SERIES

Part Series	Feature	Wattage Per Reel	Reel Length	Max Length in Series	Color Options	Connector Options
ZFS-8500	Standard Intesity Economy Flex	21.6 Watts	5 Meter	10 Meter	Cool White (CW) Neutral White (NW) Warm White (WW) Yellow	ZFS-CH140-8I - Input, 5" lead ZFS-CH0-8J - Joiner, no lead ZFS-CH138-8J - Joiner, 5" lead ZFS-CNL-8J - "L" connection ZFS-CNT-8J - "T" connection ZFS-CNX-8J - "X" connection
ZFS-85000HD	Max Intesity High Density	52.8 Watts	5 Meter	5 Meter	CW, NW, WW Red Blue	ZCH-143HD-8I - Input, 5" lead ZFS-CHXB-8I - Input, no lead ZCH-137HD-8J - Joiner, 5" lead ZFS-CHBB-8J - Joiner, no lead
ZFS-85020WR	Water resistant	48 Watts	5 Meter	5 Meter	CW, NW	
ZFS-85000SV	Sideview	24 Watts	5 Meter	5 Meter	CW, NW	
ZFS-155000	Double LED	57 Watts	5 Meter	5 Meter	CW	
ZFS-105000-DBW	Adjustable White Output	25 Watts	5 Meter	20 Meter	Adjustable White	
SEE JKL'S APPLICATION SHEET JKL-AS-ZFS-DUAL-WHITE ON THIS ITEM FOR ADDITIONAL DETAIL						
ZFS-10504-RGB	Adjustable Color RGB	36 Watts	5 Meter	5 Meter	Adjustable RGB	ZCH-170-RGB-J - Joiner, 6" lead ZCH-CH0-RGB10J - Joiner, no lead
SEE JKL'S APPLICATION SHEET JKL-AS-ZFS-RGB-LED ON THIS ITEM FOR ADDITIONAL DETAIL						

LED FLEX RIBBON - 24VDC

Part Series	Feature	Wattage Per Reel	Reel Length	Max Length in Series	Color Options	Connector Options
ZFS-84000	High Density 8mm width	34.6 Watts	4 Meter	8 Meter	CW, NW, WW	ZCH-143HD-8I - Input, 5" lead ZCH-137HD-8J - Joiner, 5" lead
ZFS-124000	High Density 12mm width	46 Watts	4 Meter	8 Meter	CW, NW, WW	ZFS-CH144-12I - Input, 5" lead ZFS-CH0-12J - Joiner, no lead
ZFS-125000HD	High Lumen 12mm width	48 Watts	5 Meter	8 Meter	Blue, Green	
ZFS-245000	High Lumen 10mm width	67 Watts	5 Meter	8 Meter	CW, NW, WW	ZFS-CH144-12I - Input, 5" lead ZFS-CH0-12J - Joiner, no lead
ZFS-104000	High Lumen 10mm width	46 Watts	4 Meter	8 Meter	CW, NW, WW	ZFS-CH144-12I - Input, 5" lead ZFS-CH0-12J - Joiner, no lead
ZFS-105000-24RGB	Adjustable Color RGB	72 Watts	5 Meter	5 Meter	Adjustable RGB	ZCH-170-RGB-J - Joiner, 6" lead ZCH-CH0-RGB10J - Joiner, no lead
SEE JKL'S APPLICATION SHEET JKL-AS-ZFS-RGB-LED ON THIS ITEM FOR ADDITIONAL DETAIL						

1 METER = 3.25 FEET CW = Cool White, NW = Warm White, WW = Warm White