



COAXIAL

Amplifier

ZHL-5W-63-S+ ZHL-5W-63X-S+

50Ω Medium High Power 600 to 6000 MHz

THE BIG DEAL

- Wideband, 600 to 6000 MHz
- High OIP3, +42 dBm typ.
- High Gain, 45 dB typ.



Generic photo used for illustration purposes only

APPLICATIONS

- Communication systems
- Cellular
- Instrumentation
- Laboratory

Model No.	ZHL-5W-63-S+	ZHL-5W-63X-S+ ▲
Case Style	CP2548-2	
Connectors	SMA	

+RoHS Compliant
 The +Suffix identifies RoHS Compliance.
 See our website for methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' ZHL-5W-63-S+ is class AB a medium-power connectorized amplifier with GaN output transistor supporting a wide range of applications from 600 to 6000 MHz, such as test instrumentation, SatCom, and mobile communications systems, including those operating in the new telecom Band 71 allocation (617 to 698 MHz). This model provides +37 dBm output power at saturation. The amplifier operates on a +28V DC supply and comes housed in compact aluminum alloy case (6.7 x 4.3 x 1.18") with SMA connectors and an optional heat sink for efficient cooling.

KEY FEATURES

Feature	Advantages
Wideband, usable from 500 to 6100 MHz	One amplifier supports a broad range of system and test lab applications. Extended bandwidth down to 600 MHz supports new telecom Band 71 allocation (617 to 698 MHz)
High Gain, 45 dB	Reduces the number of gain stages, lowering component count and overall system cost.
Medium Output Power, +37 dBm	Supports a wide range of power requirements.
High OIP3, +42 dBm	Provides highly linear performance with excellent sensitivity and two-tone spur-free dynamic range.

REV. A
 ECO-017840
 ZHL-5W-63-S+
 MCL NY
 230508





COAXIAL

Amplifier

ZHL-5W-63-S+ ZHL-5W-63X-S+

50Ω Medium High Power 600 to 6000 MHz

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Condition (MHz)	ZHL-5W-63-S+ ZHL-5W-63X-S+ ▲			Units
		Min.	Typ.	Max.	
Frequency Range		600	–	6000	MHz
Gain	600-6000	36	45	53	dB
Gain Flatness	600-6000	–	±3.5	–	dB
Output Power at 3dB compression	600-6000	–	+35	–	dBm
Output Power at saturation	600-6000	+35	+37	–	dBm
Noise Figure	600-6000	–	12	–	dB
Output third order intercept point	600-6000	–	42	–	dBm
Input VSWR	600-6000	–	2.5	–	:1
Output VSWR	600-6000	–	3.5	–	:1
DC Supply Voltage		–	28	32	V
Supply Current		–	3.0	3.5	A

▲ Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 0.3°C/W max.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	0°C to +60°C
Storage Temperature	-55°C to +100°C
DC Voltage	+32V
Input RF Power (no damage) at load	+7 dBm
Input RF power at OPEN / SHORT	-16 dBm

Permanent damage may occur if any of these limits are exceeded.





COAXIAL


Amplifier

ZHL-5W-63-S+ ZHL-5W-63X-S+

Mini-Circuits

50Ω Medium High Power 600 to 6000 MHz

OUTLINE DRAWING

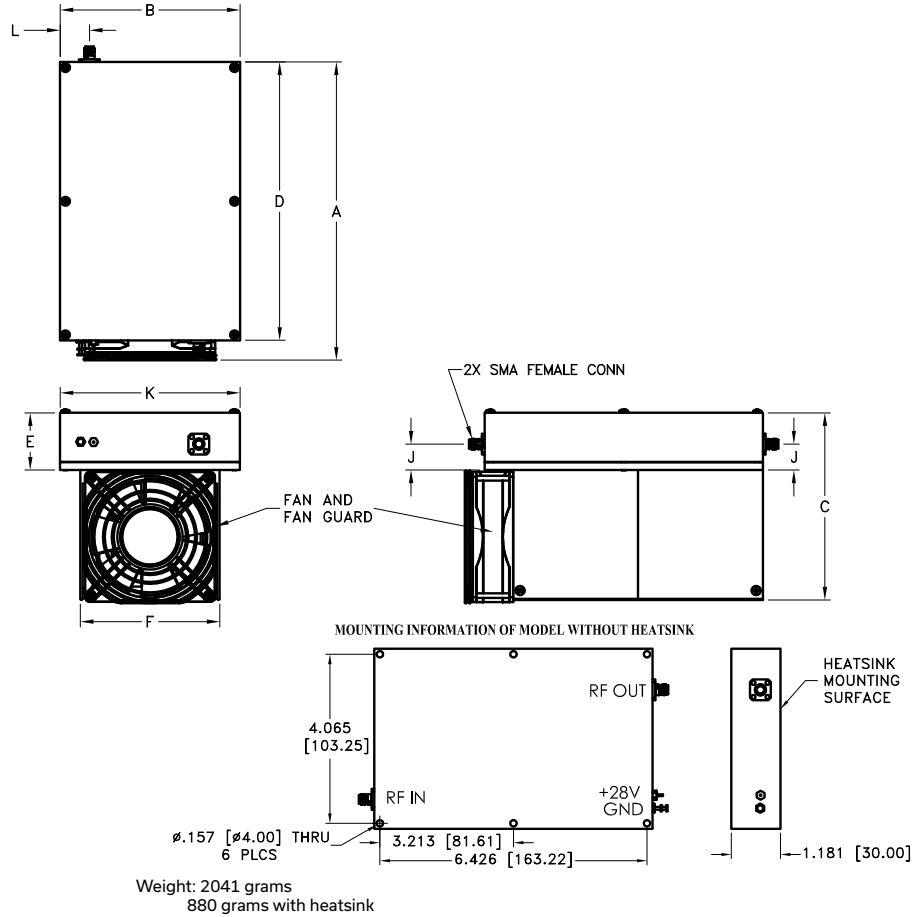

OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K	L	wt
7.25	4.33	4.58	6.69	1.38	3.36	-	-	0.62	3.34	0.71	grams*
184.15	109.98	116.33	169.93	35.052	85.344	-	-	15.748	84.836	18.034	2041
											*880 grams without heatsink

