



## COAXIAL

# Low Noise Amplifier ZX60-06203ALN+

50Ω 6 to 20 GHz

### THE BIG DEAL

- Low noise figure, 2.8 dB typ, 6 to 18 GHz
- Excellent gain flatness,  $\pm 1.3$ dB over 8 to 18 GHz
- High gain, 20dB typ. 8 to 18 GHz
- Voltage regulated internally and reverse voltage protected
- Excellent directivity, 20 dB typ
- Medium power with good linearity, 15 dBm typ. P1 dB, 26 dBm typ. OIP3



Generic photo used for illustration purposes only

Model No.	ZX60-06203ALN+
Case Style	GC957
Connectors	SMA

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### APPLICATIONS

- Microwave point to point radios
- Military EW and radar
- Satellite Systems

### PRODUCT OVERVIEW

Mini-Circuits' ZX60-06203ALN+ is a wideband low noise connectorized amplifier providing a unique combination of low noise figure, high IP3 and flat gain over a very wide frequency range, supporting a wide range of sensitive, high-dynamic range receiver applications and many systems where high performance over wideband is needed. This design operates on a single 5 V supply and comes in a rugged, compact unibody case (0.74 x 0.75 x 0.46") with SMA connectors, making it an excellent candidate for tough operating conditions and crowded system layouts.

### KEY FEATURES

Feature	Advantages
Ultra-wideband with excellent gain flatness, $\pm 1.3$ dB for 8 - 18 GHz	Enables a single amplifier to be used in a wide range of applications including EW and communication systems instrumentation and more.
Low noise over the whole band	Enables lower system noise figure performance.
High gain, 18 dB typ.	Reduces the number of gain stages, lowering component count and overall system cost.
High IP3 +25 dBm typ over 6 to 12 GHz +26 dBm typ over 12 to 20 GHz	The combination of low noise and high IP3 makes the ZX60-06203ALN+ ideal for use in low noise receiver front end (RFE) as it gives the user the advantages of sensitivity and two-tone IM performance at both ends of the dynamic range.
Excellent Directivity (Isolation-Gain), 20 dB typ.	Buffer amplifier reduces need for adjacent circuits
Low operating voltage, 5V	The amplifier features low operating voltage
Rugged, unibody construction	Mini-Circuits unibody construction integrates the RF connector into the case body, providing high reliability and excellent survivability in critical applications.

REV. OR  
NPO-002144  
ZX60-06203ALN+  
ED-15070802  
DJ/CP/AM  
211001



**COAXIAL**

# Low Noise Amplifier **ZX60-06203ALN+**

Mini-Circuits

**ELECTRICAL SPECIFICATIONS AT 25°C AND 5V, UNLESS NOTED**

Parameter	Condition (GHz)	$V_{DD}=5.0$			Units
		Min.	Typ.	Max.	
Frequency Range		6		20	GHz
Noise Figure	6 - 8		2.2		dB
	8 - 12		2.2		
	12 - 16		2.9		
	16 - 18		3.1		
	18 - 20		3.3		
Gain	6 - 8		21		dB
	8 - 12	16	20	—	
	12 - 16	16	20	—	
	16 - 18	15	19	—	
	18 - 20		17		
Input Return Loss	6 - 8		12		dB
	8 - 12		11		
	12 - 16		8		
	16 - 18		12		
	18 - 20		14		
Output Return Loss	6 - 8		9		dB
	8 - 12		12		
	12 - 16		14		
	16 - 18		15		
	18 - 20		10		
Output Power at 1dB Compression <sup>1</sup>	6 - 8		14		dBm
	8 - 12		15		
	12 - 16		15		
	16 - 18		15		
	18 - 20		15		
Output IP3 <sup>2</sup>	6 - 8		25		dBm
	8 - 12		26		
	12 - 16		26		
	16 - 18		26		
	18 - 20		27		
Device Operating Voltage ( $V_{DD}$ )	—	4.9	5.0	6.0	V
Device Operating Current ( $I_{DD}$ )		—	110	150	mA

1. Current increases at P1dB

2. OIP3 measured with 0 dBm tones and 1 MHz spacing.

**MAXIMUM RATINGS<sup>3</sup>**

Parameter	Ratings
Operating Temperature (ground lead)	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Total Power Dissipation	0.7 W
Input Power (CW), $V_d=5V$	17 dBm
DC Voltage	9V

3. Permanent damage may occur if any of these limits are exceeded. Electrical maximum ratings are not intended for continuous normal operation.






COAXIAL

# Low Noise Amplifier **ZX60-06203ALN+**

Mini-Circuits

## OUTLINE DRAWING

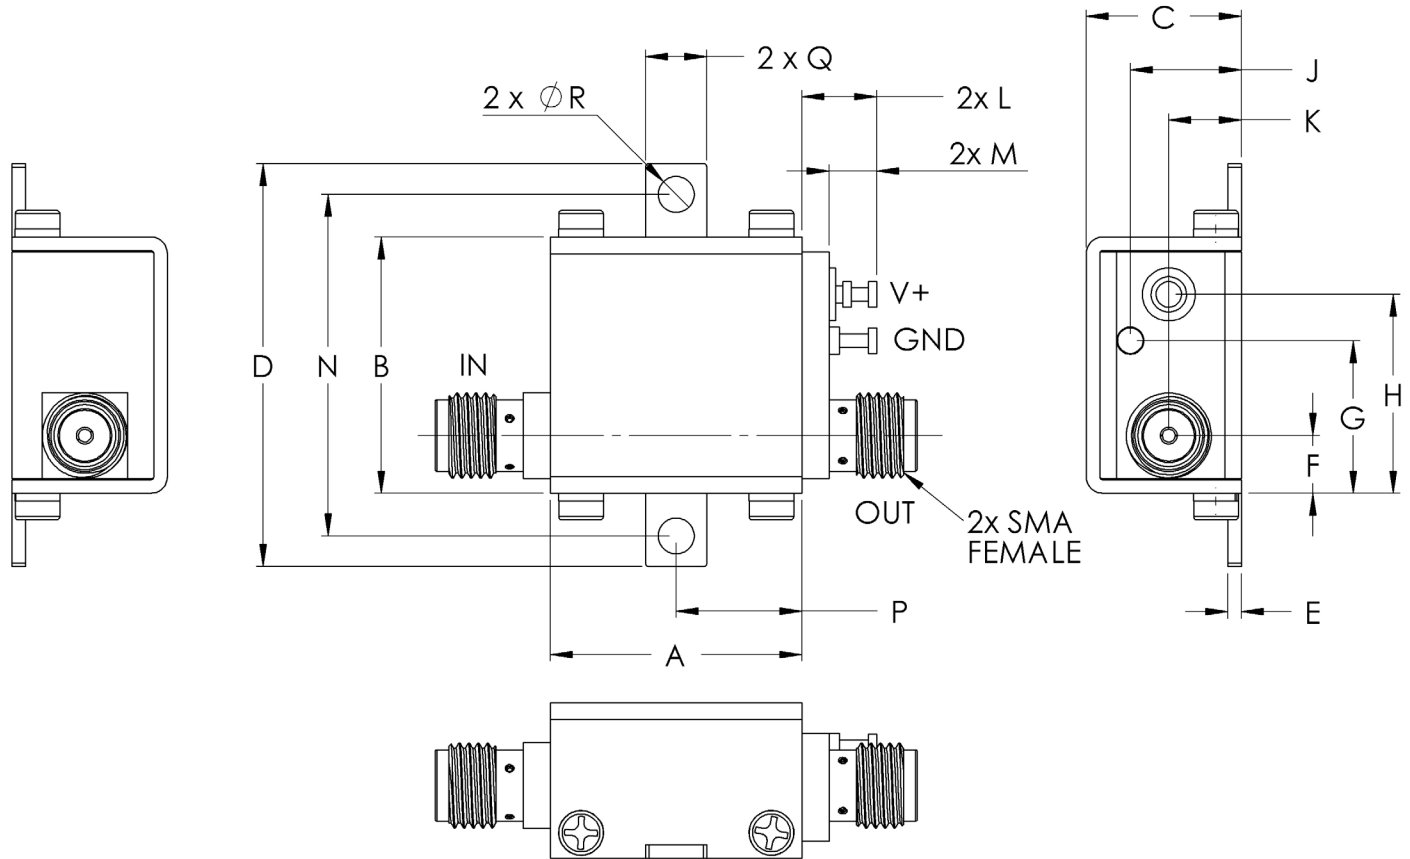

NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. AN-40-010.

## OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt
.74	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.14	1.00	.37	.18	.106	grams
18.80	19.1	11.68	30.0	1.02	4.32	11.4	14.99	8.38	5.33	5.59	3.56	25.40	9.40	4.57	2.69	23.0