


11TH GEN INTEL® CORE™ PROCESSORS

conga-HPC/cTLU

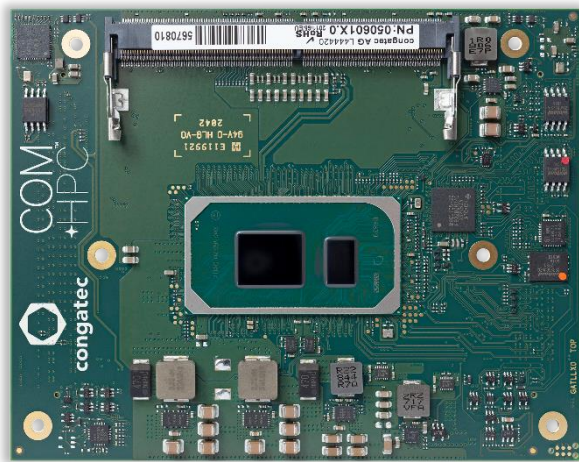


COM+HPC®

- Embedded/Industrial use condition
- Extended temperature options available
- PCI Express Gen 4
- Integrated high performance Xe (Gen 12) graphics with 96 EU
- AI/DL Instruction Sets including VNNI

Form Factor	COM-HPC, Size A (95 x 120 mm), Client Connector Pinout						
CPU	Processor	Cores/Threads	Base Frequency/max. Turbo	TDP	Graphics	Intel Use Condition	
	Core™ i7-1185G7E	4C/8T	1.80 GHz / 4.40 GHz	12-28W	96EU	Embedded Broad Market	
	Core™ i5-1145G7E	4C/8T	1.50 GHz / 4.40 GHz	12-28W	80EU	Embedded Broad Market	
	Core™ i3-1115G4E	2C/4T	2.20 GHz / 3.90 GHz	12-28W	48EU	Embedded Broad Market	
	Celeron 6305E	2C/2T	1.80 GHz / --	15W	48EU	Embedded Broad Market	
	Core™ i7-1185GRE	4C/8T	1.80 GHz / 4.40 GHz	12-28W	96EU	Industrial	
	Core™ i5-1145GRE	4C/8T	1.50 GHz / 4.10 GHz	12-28W	80EU	Industrial	
	Core™ i3-1115GRE	2C/4T	2.20 GHz / 3.90 GHz	12-28W	48EU	Industrial	
DRAM	Up to 2x SO-DIMM sockets for DDR4 memory modules up to 32 GByte each (64 GByte total) with 3200 MT/s						
Graphics	Integrated Xe (Gen 12) graphics engine with up to 96 EU (Execution Units) Supporting 4 independent display units (4x 4k/2x 8K) Enhanced media (AV1/12b) with up to 2 Vdbox Next Gen IPU6 with DPHY2.1 DP 1.4						
Display	3x DP/DP++ 1x eDP						
Ethernet	2x 2.5 GbE TSN Ethernet						
I/O Interfaces	4x PCIe Gen4 8x PCIe Gen3 2x USB 4.0 2x USB 3.2 8x USB 2.0 2x SATA III (6Gb/s) SPI 2x UART 12x GPIO 8x MIPI-CSI						
Audio	1x I2S 2x SoundWire						
congatec Board controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics I ² C bus (fast mode, 400 kHz, multi-master) Power Loss Control Hardware Health Monitoring POST Code redirection						
Embedded BIOS Feature	AMI Aptio® UEFI firmware 32 Mbyte serial SPI with congatec Embedded BIOS feature OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update						
Security	Trusted Platform Module (TPM 2.0)						
Power Management	ACPI 5.0 with battery support						
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Microsoft® Windows IoT 10 Core Linux Android Yocto RTS Hypervisor						
Temperature Range	Commercial:	Operating Temperature: 0 to +60°C		Storage Temperature: -20 to +80°C			
	Industrial:	Operating Temperature: -40 to +85°C		Storage Temperature: -40 to +85°C			
Humidity	Operating:	10 to 90% r. H. non cond.					
	Storage:	5 to 95% r. H. non cond.					
Size	95 x 120 mm ²						

conga-HPC/cTLU | Block Diagram

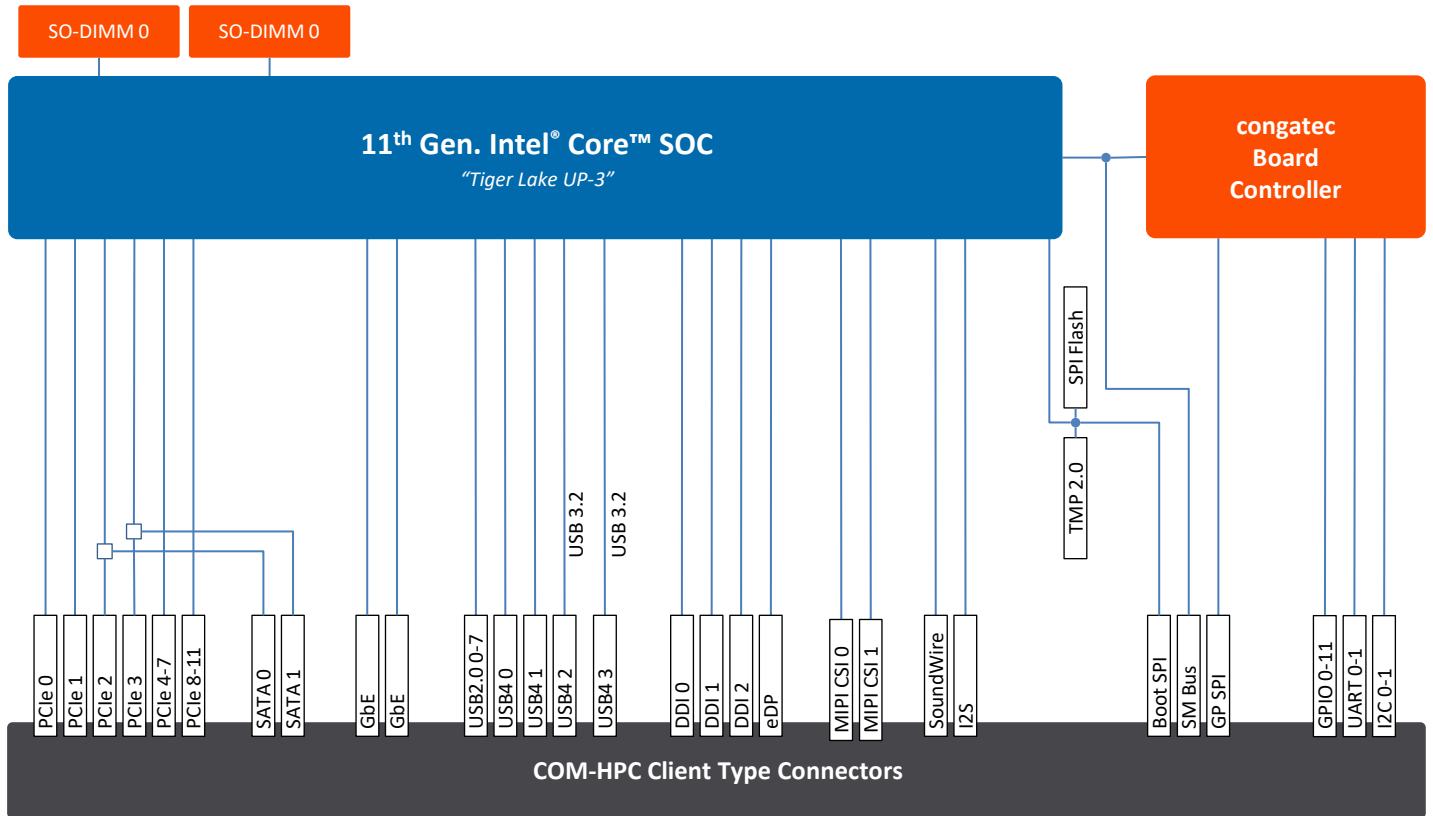

conga-HPC/cTLU | Bottom Side View

