

# EMBEDDED QSEVEN


## conga-QA7



- Qseven module based on Intel Atom® x6000E Series and Intel® Pentium® and Celeron® J and N Series processors
- High performance Intel® UHD Graphics (Gen11 LP)
- Options for Industrial Temperature Range -40°C to 85°C
- Options for Time Sensitive Networking and Time Coordinated Computing for improved Realtime Capability
- Up to 4.267 MT/s Memory Support

<b>Form Factor</b>	Qseven Form Factor   Qseven Spec. Rev. 2.1 compliant   70 x 70 mm					
<b>CPU</b>	Processor	TDP	Cores/Threads	Base Frequ./Turbo	Gen 11 Gfx	Intel Use Condition
	J6413	10W	4 / 4	1.8 GHz / 3.0 GHz	16 EU	PC Client
	J6426	10W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	PC Client
	x6211E	6W	2 / 2	1.3 GHz / 3.0 GHz	16 EU	Embedded
	x6413E	9W	4 / 4	1.5 GHz / 3.0 GHz	16 EU	Embedded
	x6425E	12W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	Embedded
	x6212RE	6W	2 / 2	1.2 GHz / ---	16 EU	Industrial
	x6414RE	9W	4 / 4	1.5 GHz / ---	16 EU	Industrial
	x6425RE	12W	4 / 4	1.9 GHz / ---	32 EU	Industrial
<b>DRAM</b>	max. 16GB onboard LPDDR4x   up to 4.267 MT/s					
<b>Ethernet</b>	Intel® GbE with TSN support and Out-Of-Band Management   real-time trigger					
<b>I/O Interfaces</b>	up to 2x USB 3.1 Gen2   up to 1x USB3.1 Dual Role   up to 8x USB 2.0   2x SATA III   SDIO   4x PCIe Gen3   I <sup>2</sup> C Bus   SMBus   SPI (option)   UART   CAN   LPC					
<b>Mass Storage</b>	eMMC 5.1 onboard flash up to 64 Gbyte (optional up to 256 Gbyte)					
<b>Audio</b>	Intel® HD Audio					
<b>Graphics</b>	Intel® UHD Graphics (Gen11 LP)					
<b>LVDS</b>	18/24-bit Single/Dual Channel LVDS Interface, resolutions up to 1920X1200@60Hz, VESA standard or JEIDA data mapping, Automatic Panel Detection via EDID/EPI   shared with eDP 1.3 supporting up to 4096x2160@60Hz (option) or MIPI-DSI 1.2 supporting up to 3200x2000@60Hz					
<b>Digital Display Interface</b>	Dual Mode DisplayPort 1.4 4096x2160@60Hz					
<b>congatec Board controller</b>	Multistage watchdog   non-volatile user data storage   manufacturing and board Information   board statistics   fast mode and multi-master I <sup>2</sup> C bus   power loss control					
<b>Embedded BIOS Feature</b>	AMI Aptio® UEFI firmware   32 MByte serial SPI with congatec Embedded BIOS features   OEM Logo   OEM CMOS Defaults   LCD Control   Display Auto Detection   Backlight Control   Flash Update					
<b>Power Management</b>	ACPI 5.0 compliant   Smart Battery Management					
<b>Operating Systems</b>	Microsoft® Windows 10   Microsoft® Windows 10 IoT Enterprise   Linux (Yocto Project)   Android   RTS Hypervisor					
<b>Power Consumption</b>	Typ. Application: see manual for full details					
<b>Temperature Range</b>	Commercial: Operating Temperature: 0 to +60°C		Storage Temperature: -20 to +80°C			
	Industrial: Operating Temperature: -40 to +85°C		Storage Temperature: -40 to +85°C			
<b>Humidity</b>	Operating Humidity: 10 to 90% r. H. non cond. Storage Humidity: 5 to 95% r. H. non cond.					
<b>Size</b>	70 x 70 mm (approx. 2.75" x 2.75")					

# conga-QA7 | Block Diagram

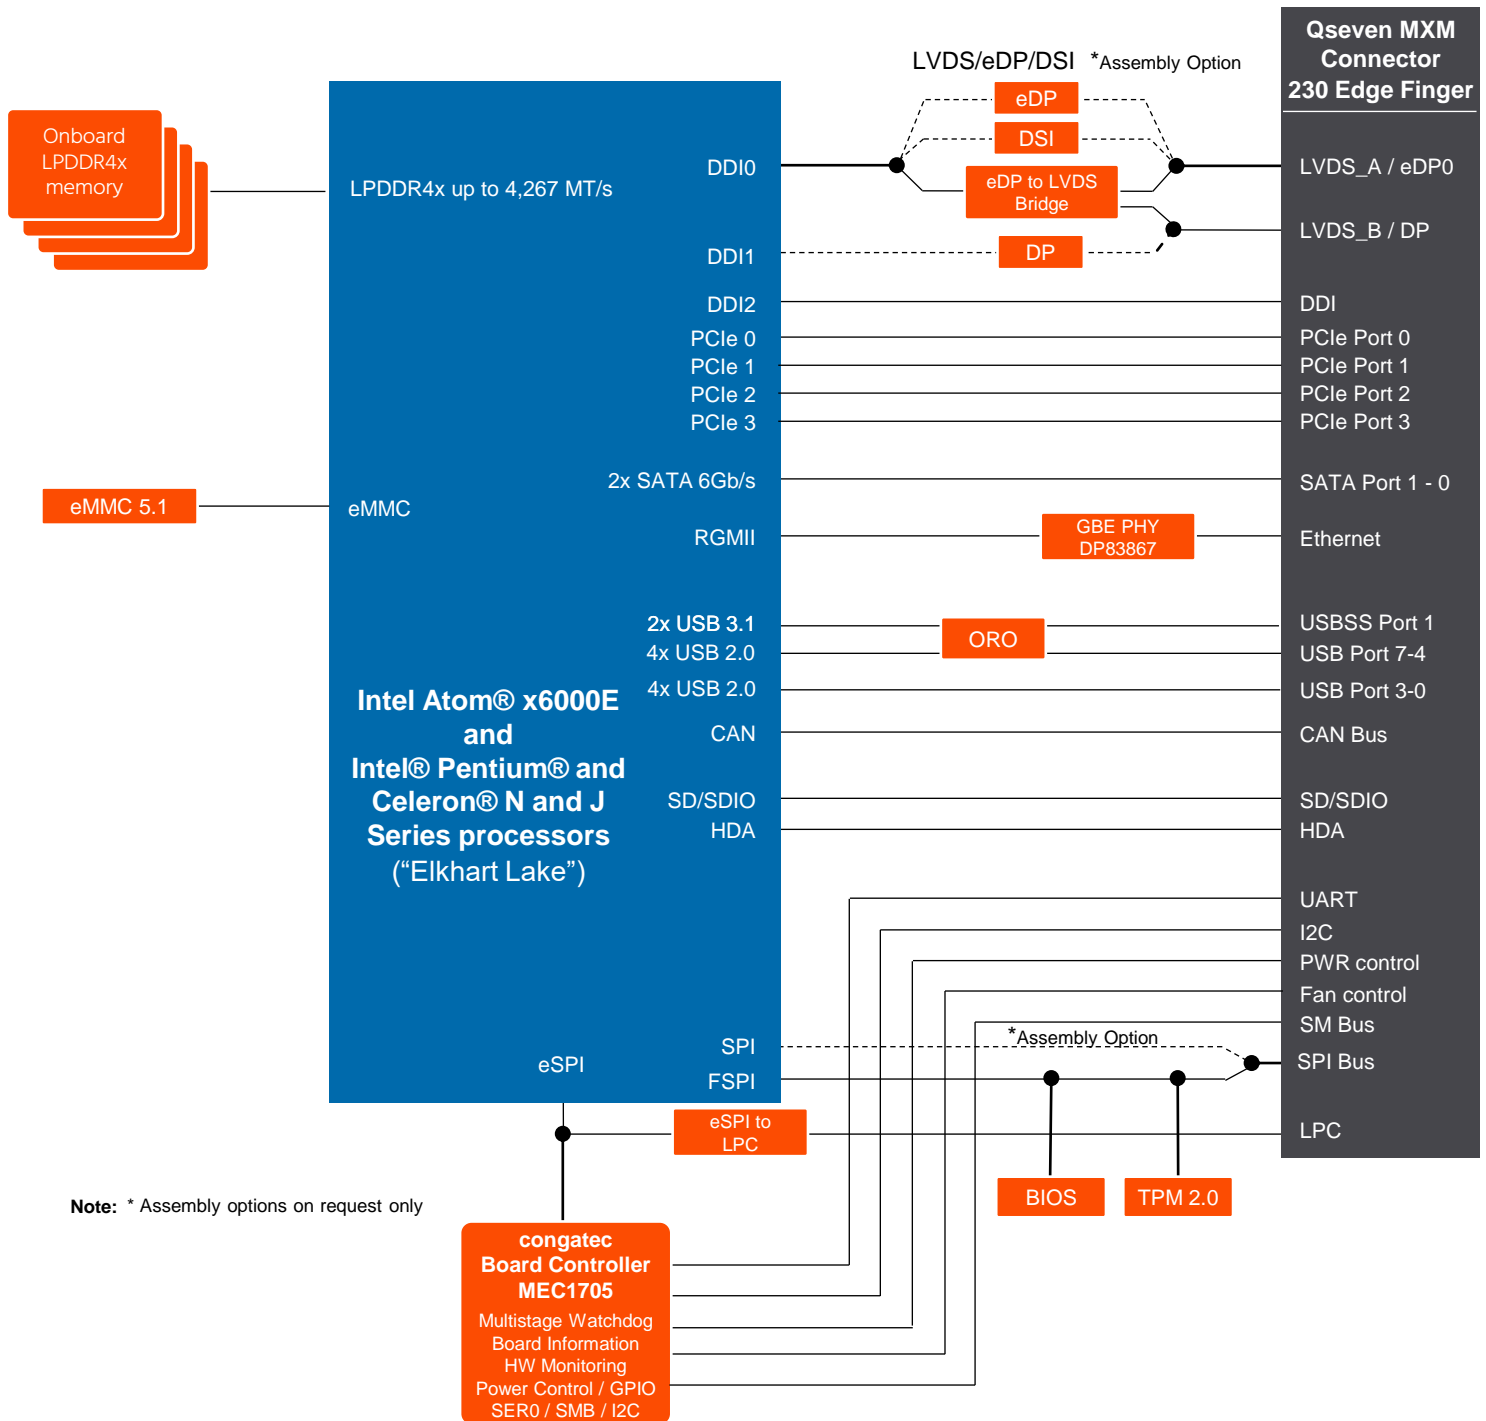

Note: \* Assembly options on request only