


SERVER-CLASS EMBEDDED PERFORMANCE

conga-TS175




- 7th Generation Intel® Core™ processor
- Intel® Xeon® processors for data center applications
- Intel® Optane™ memory can be connected via PCI Express Gen 3.0
- ECC memory support
- Up to 32 GByte dual channel DDR4 memory

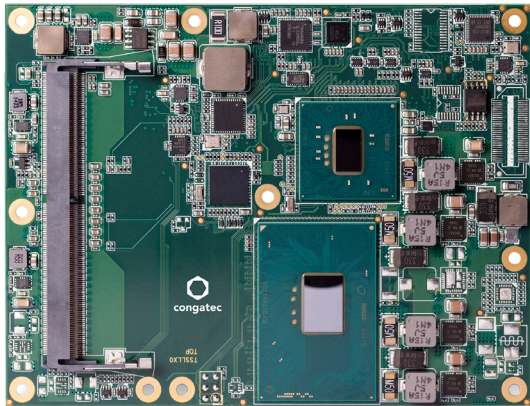

Formfactor	COM Express® Basic, (95 x 125 mm), Type 6 Connector Pinout					
CPU	Intel® Xeon® E3-1505M v6	4.0 GHz (Burst) 3.0 GHz Clock	Quad Core	8MB cache	45W / 35W TDP	
	Intel® Xeon® E3-1505L v6	3.0 GHz (Burst) 2.2 GHz Clock	Quad Core	8MB cache	25W TDP	
	Intel® Core™ i7-7820EQ	3.7 GHz (Burst) 3.0 GHz Clock	Quad Core	8MB cache	45W / 35W TDP	
	Intel® Core™ i5-7440EQ	3.6 GHz (Burst) 2.9 GHz Clock	Quad Core	6MB cache	45W / 35W TDP	
	Intel® Core™ i5-7442EQ	2.9 GHz (Burst) 2.1 GHz Clock	Quad Core	6MB cache	25W TDP	
	Intel® Core™ i3-7100E	2.9 GHz Clock	Dual Core	3MB cache	35W TDP	
	Intel® Core™ i3-7102E	2.1 GHz Clock	Dual Core	3MB cache	25W TDP	
	Intel® Turbo Boost Technology Intel® Hyper-Threading Technology (Intel® HT Technology) Intel® Advanced Vector Extensions 2.0 (Intel® AVX2) Intel® Advanced Encryption Standard New Instructions (Intel® AES-NI) Integrated dual channel memory controller up to 34,1 GByte/sec. memory bandwidth Integrated Intel® Gen9 HD Graphics with frequency up to 1GHz Intel® Clear Video HD Technology Intel® Virtualization Technology (Intel® VT) Intel® Trusted Execution Technology (Intel® TXT) Intel® Secure Key					
DRAM	2 Sockets, SO-DIMM DDR4 up to 2400 MT/s and 32GByte dual channel, optionally with ECC support					
Chipset	Mobile Intel® 100 Series Chipset					
Ethernet	Intel® 219-LM GbE LAN Controller with AMT 11.6 support					
I/O Interfaces	8x PCI Express™ gen. 3.0 lanes 4x Serial ATA® Gen 3 4x USB 3.0 (XHCI) 8x USB 2.0 (XHCI) 1x PEG x16 Gen 3 LPC bus I²C bus (fast mode, 400 kHz, multi-master) 2x UART					
Sound	Digital High Definition Audio Interface with support for multiple audio codecs					
Graphics	OpenCL 2.0/2.1, OpenGL 4.4/4.5 and DirectX12 (for Windows 10) support up to three independent displays: 3x DDI High performance hardware MPEG-2 decoding WMV9 (VC-1) and H.265 (HEVC) support Blu-ray support @ 40 MBit/s HEVC, VP9 and VDENC encoding					
LVDS (eDP optional)	Dual channel LVDS transmitter, Supports flat panels 2x24 Bit interface VESA and openLDI colour mappings resolutions up to 1920x1200 Automatic Panel Detection via EDID/EPI					
Digital Display Interface (DDI)	3x TMDS/DisplayPort 1.2 with support for Multi-Stream Transport (MST) resolutions up to 4k VGA					
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control					
Embedded BIOS Features	AMI Aptio® UEFI 2.x firmware 8/16 MByte serial SPI firmware flash					
Security	The conga-TS175 can be optionally equipped with a discrete "Trusted Platform Module" (TPM 1.2 / 2.0). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e-commerce will benefit also with improved authentication, integrity and confidence levels.					
Power Management	ACPI 4.0 with battery support					
Operating Systems	Microsoft® Windows 10 (64bit only) Microsoft® Windows 10 IoT Enterprise (64bit only) Linux					
Power Consumption	See User's Guide for full details					
Temperature	Operating: 0 .. +60°C Storage: -40 .. +85°C					
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.					
Size	95 x 125 mm (3.74" x 4.92")					

conga-TS175 | Block diagram

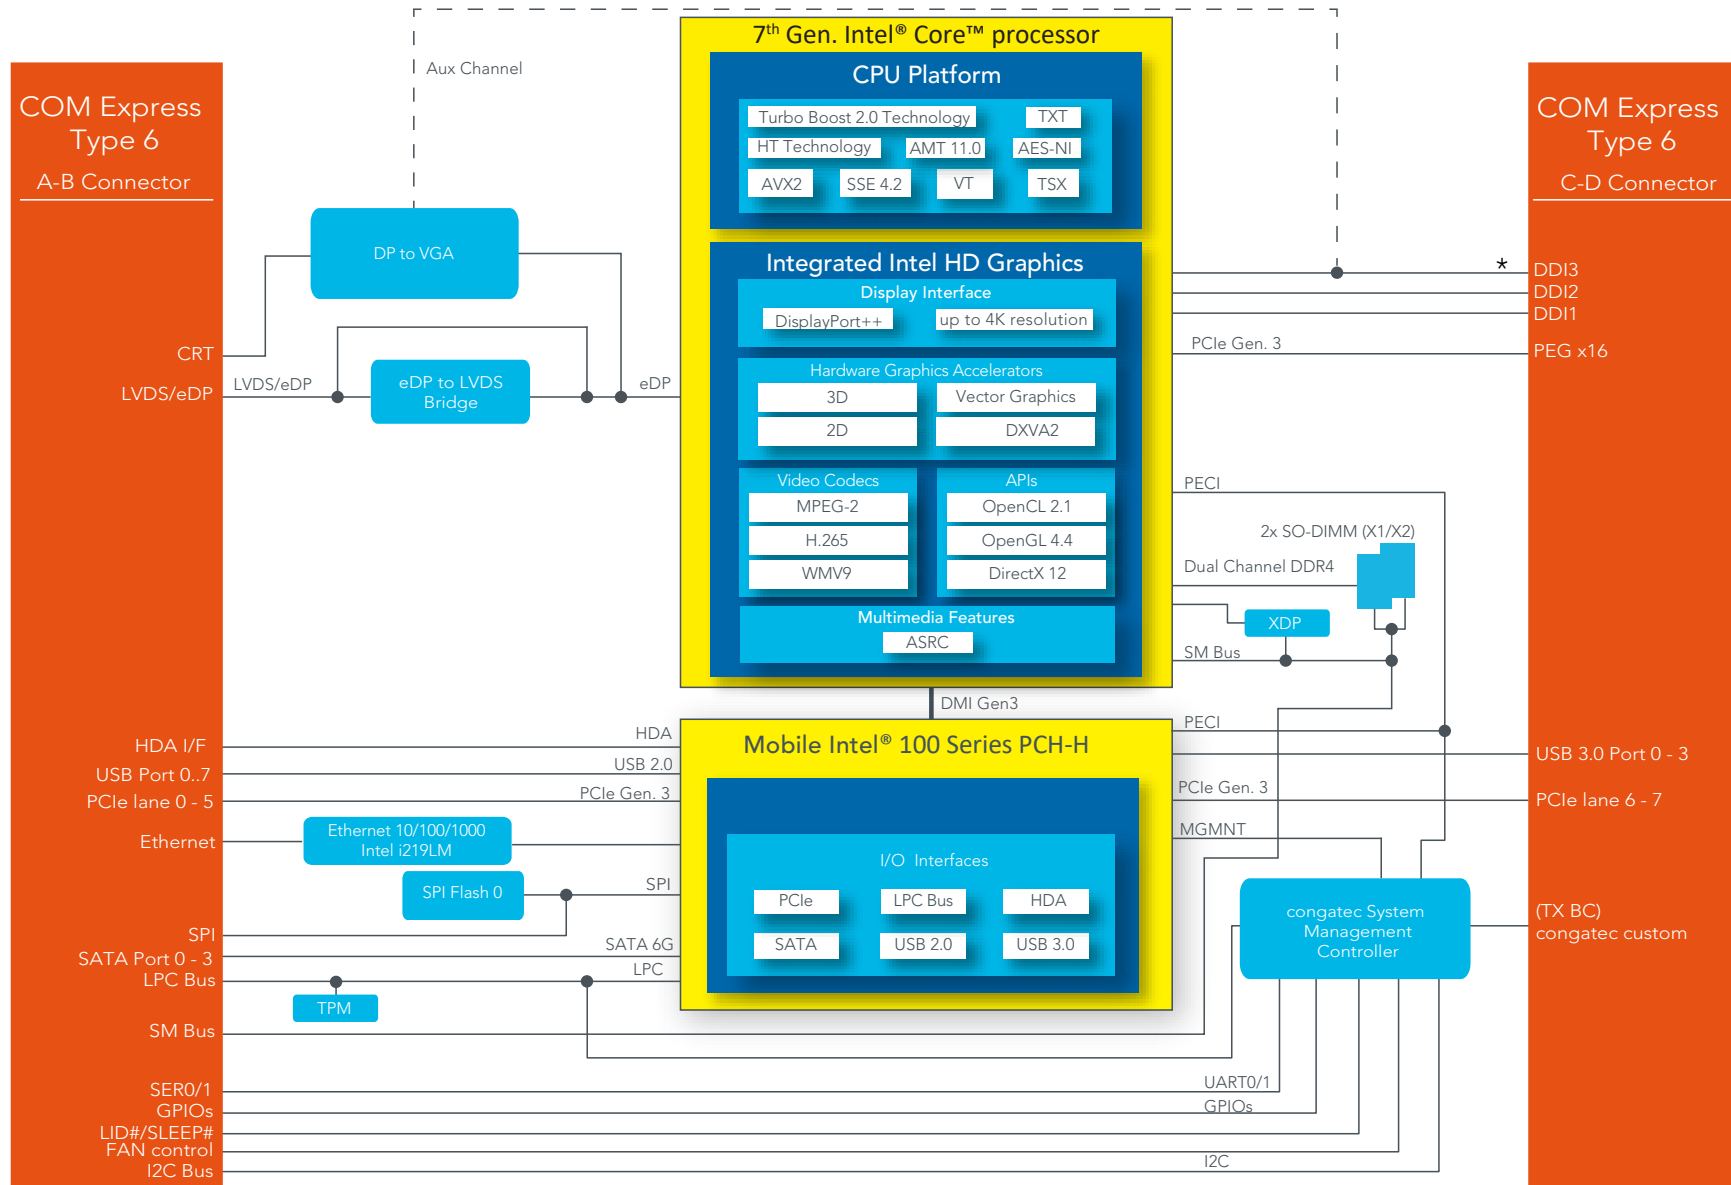

* See manual for limitations.