


uATX-RYZEN (MZRYZBM)

Micro-ATX with AMD® Ryzen3/ Ryzen2 Processor, Dual channel DDR4 memory, PCIe slot , 6 x COM , 10 x USB, 4 x SATA 6Gb/s

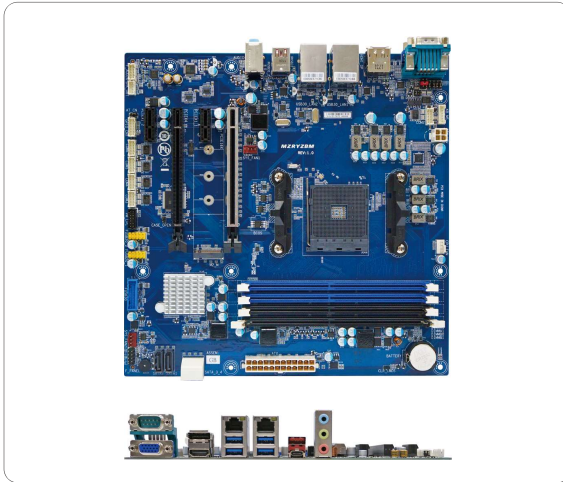

Features

- Micro ATX form factor
- Supports AMD Ryzen 3/ Ryzen 2 Processors
- AMD B450
- Dual Channel DDR4, 4 x DIMMs
- 2 x GbE LAN ports
- 4 x SATA 6Gb/s ports
- HDMI, Display Port, D-Sub ports for multiple display
- 1 x RS232/422/485/5V/12V/RI COM ports
- 5 x RS232 COM ports

Specifications


Form Factor	Micro ATX 244W x 244D (mm)
CPU	Support AMD 3rd Gen/2nd Gen/1st Gen Ryzen™ CPU/APU AM4 µPGA (Matisse/Picasso/Raven2/Pinnacle/Raven/ Summit Ridge) TDP under 95W
Socket	1 x Socket AM4
Chipset	AMD B450
Memory	4 x DDR4 DIMM sockets, Max. Capacity 64GB Support Dual channel DDR4 2666/2400/2133 MHz memory modules
Ethernet	2 x GbE LAN ports (Realtek® RTL8111HS)
Video	Integrated Graphics Process - Radeon™ Vega 11/8/3 Graphics: 1 x HDMI 1.4 1 x Display Port 1 x VGA (3 independent display outputs)
Audio	Realtek® Audio Codec
Storage	4 x SATA 6Gb/s ports
Raid	RAID/0/1/10
Expansion Slots	1 x PCIe x16 (Gen3 x16) 1 x PCIe x4 (Gen2 x2) 2 x PCIe x1 (Gen2 x1) 1 x 2280/2260/2242 M.2 M-Key (PCIe x4, SATA6Gb/s)

Internal I/O	1 x 24-pin ATX main power connector 1 x 4-pin ATX 12V power connector 1 x CPU fan header 2 x System fan headers 1 x Front panel header 1 x Front audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x USB 3.0 headers 5 x COM headers (RS-232) 1 x PS/2 Keyboard/Mouse Connector 1 x GPIO (8 bits) & SMBUS header 1 x Clear CMOS jumper 1 x Buzzer
Rear I/O	3 x Audio jacks (Line in, Line out, Mic in) 1 x COM port (RS-232/422/485 and RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN ports 4 x USB 3.0 1 x USB 3.1 Gen2 1 x USB 3.1 Gen2 (Type C)
TPM	1 x TPM header
OS Compatibility	Windows 10 (x64)
Operating Properties	Operating temperature: 0°C to 60°C Operating humidity: 0-90% (non-condensing) Non-operating temperature: -20°C to 70°C Non-operating humidity: 0%-95% (non-condensing)

GIGAIPC reserves the right to modify or change technical data without prior notice.

Dimension

Unit: mm

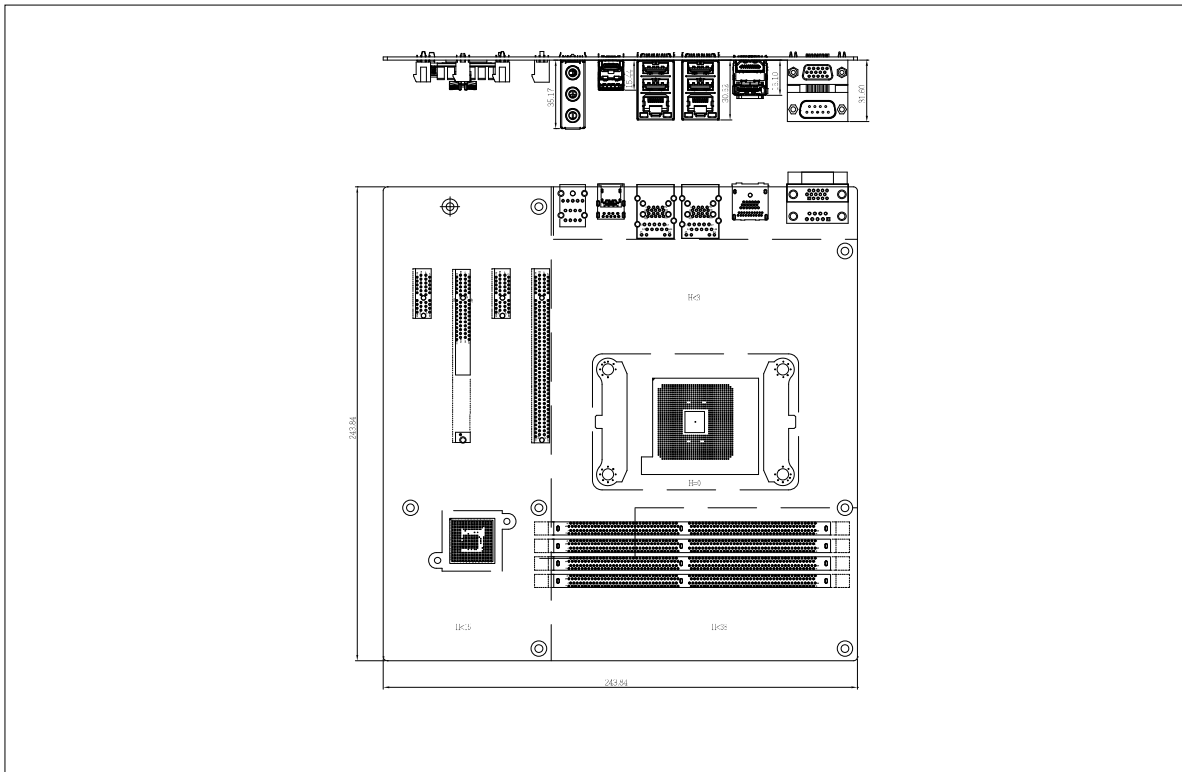

Application Scenarios

- Bulk Packing Capacity: 20pcs
- Carton size: 609 x 581 x 362 (mm)
- Content:
 - IO Shield x 1 (P/N: 12AIO-MZRYZ0-00R)

Ordering Information

- Motherboard: 9MZRYZBMNR-SI

OPTIONAL KIT

- TPM 2.0 module P/N: 9CTM000NR-00

GIGAIPC reserves the right to modify or change technical data without prior notice.