

**BittWare**  
a molex company

**XUP-VVH**  
PCIe FPGA Board



## UltraScale+ PCIe board with integrated HBM2 memory



BittWare's XUP-VVH is an UltraScale+ VU37P FPGA-based PCIe card ideal for high-density datacenter applications that demand high memory bandwidth. The UltraScale+ FPGA helps these demanding applications avoid I/O bottlenecks with integrated High Bandwidth Memory (HBM2) tiles on the FPGA that support up to 8 GBytes of memory at 460 GBytes/sec.

Along with the integrated memory, the UltraScale+ VU37P offers up to 2.8 million logic elements, which gives designers incredible performance potential — yet with a power density that makes thermal management difficult. The XUP-VVH meets this challenge with BittWare's Viper platform, supporting large FPGA loads, up to 256 GBytes DDR4, and 4x 100 Gbps Ethernet.

BittWare's Viper platform uses advanced computer flow simulation to drive the physical board design in a thermals first approach, including the use of heat pipes, airflow channels, and arranging components to maximize the limited available airflow in a server. Viper boards are passive by default, with active cooling as an option.




Xilinx VU37P FPGA: lidless package is used by BittWare's Viper thermal management for enhanced cooling performance

## key features

**4x 100GbE**  
via 4 QSFP28

**Up to 256 GBytes**  
DDR4

**VU37P FPGA:**  
**2.8 million LCs**  
**8GBytes HBM2**  
FPGA by Xilinx

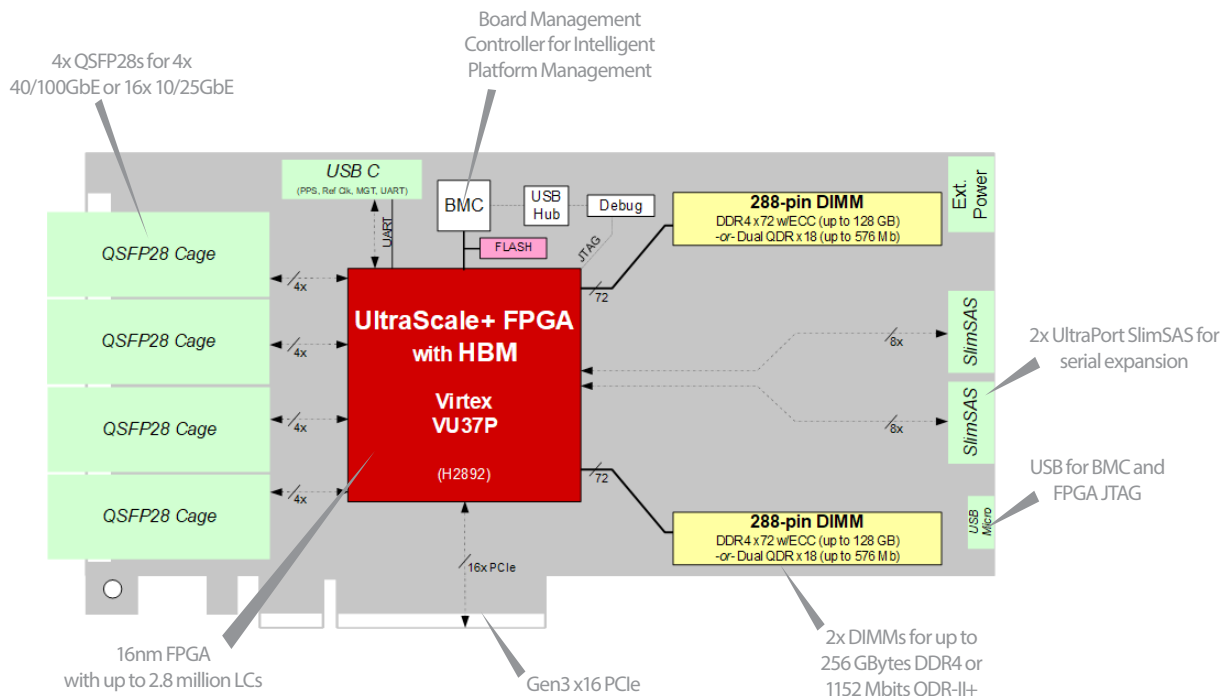


# Additional Services

Take advantage of BittWare's range of design, integration, and support options



## Customization

Additional specification options or accessory boards to meet your exact needs.

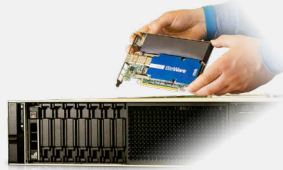


## Server Integration

Available pre-integrated in our [TeraBox servers](#) in a range of configurations.



## Application Optimization

Ask about our services to help you port, optimize, and benchmark your application.

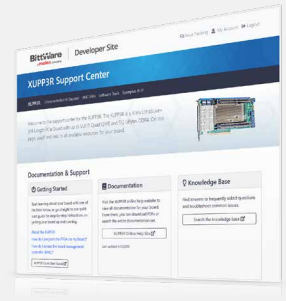

## Service and Support

BittWare Developer Site provides online documentation and issue tracking.

## Board Specifications

FPGA	<ul style="list-style-type: none"> <li>Virtex UltraScale+               <ul style="list-style-type: none"> <li>VU37P</li> <li>8 GBytes of HBM2 high-bandwidth DRAM</li> <li>Core speed grade - 2</li> </ul> </li> <li>Contact BittWare for other FPGA options</li> </ul>
On-board Flash	<ul style="list-style-type: none"> <li>Flash memory for booting FPGA</li> </ul>
External memory	<ul style="list-style-type: none"> <li>2 DIMM sites, each supporting:               <ul style="list-style-type: none"> <li>Up to 128 GBytes DDR4 x72 with ECC</li> <li>Up to 576 Mbits dual QDR-II+ x18 (2 independent 288 Mbit banks)</li> </ul> </li> </ul>
Host interface	<ul style="list-style-type: none"> <li>x16 Gen3 interface direct to FPGA</li> </ul>
USB port	<ul style="list-style-type: none"> <li>Micro USB: access to BMC and FPGA JTAG</li> </ul>
Utility	<ul style="list-style-type: none"> <li>Connects to a breakout board for UART, 1 PPS input, and 10MHz clock input</li> </ul>
UltraPort SlimSAS	<ul style="list-style-type: none"> <li>2 UltraPort SlimSAS on rear edge connected to FPGA via 16x GTY transceivers</li> <li>Can support an additional x16 or x8 PCIe interface (requires soft IP core and additional slot)</li> </ul>
QSFP cages	<ul style="list-style-type: none"> <li>4 QSFP28 (zQSFP) cages on front panel connected directly to FPGA via 16 transceivers</li> <li>Each supports 100GbE, 40GbE, 4x 25GbE, or 4x 10GbE and can be combined for 400GbE</li> </ul>

### Board Management Controller

- Voltage, current, temperature monitoring
- Power sequencing and reset
- Field upgrades
- FPGA configuration and control
- Clock configuration
- I<sup>2</sup>C bus access
- USB 2.0
- Voltage overrides

### Cooling

- Standard: double-width passive heatsink

### Electrical

- On-board power derived from 12V PCIe slot & an AUX connector (8-pin)
- Power dissipation is application dependent

### Environmental

- Operating temperature 5°C to 35°C

### Size

- ¾-length, standard-height PCIe dual-slot board
- 10 x 4.37 inches (254 x 111.15 mm)

## Development Tools

### System development

- BittWorks II Toolkit** - host, command, and debug tools for BittWare hardware

### FPGA development

- FPGA Examples** - example Vivado projects
- Xilinx Tools** - Vivado® Design Suite



ALLIANCE PROGRAM  
CERTIFIED

To learn more, visit [www.BittWare.com](http://www.BittWare.com)

Rev 2020.02.11 | February 2020

© BittWare 2020

UltraScale, Virtex, and Vivado are registered trademarks of Xilinx Corp. All other products are the trademarks or registered trademarks of their respective holders.

