



# Echo 41 2G/3G/4G EMBEDDED SMALL FPC ANTENNA

#### **Key Features**

- Wide Bandwidth Antenna
- Peak Gain 4dBi
- Designed for embedded applications



# **General Description**

The Echo 41 is an embedded wideband PCB antenna with a good peak gain performance.

The wideband allows for a migration plan from one technology to another; 2G to 3G to 4G, or simply the choice to select a technology depending on usage.

Typically supplied with a uFL/ IPEX connector and a short tail of cable. Alternative cable lengths and connectors can be supplied for volume requirements.

### **Additional Considerations**

- Small format design for applications with limited space
- Meets all EU compliance criteria for electronic goods



Siretta Ltd Basingstoke Road Spencers Wood Reading Berkshire RG7 1PW

+44(0)118 976 9000 sales sales@siretta.com email www.siretta.com

web





# Echo 41 2G/3G/4G EMBEDDED SMALL FPC ANTENNA


### **Key Specifications - Electrical**

Temperature range:	-30° to +75°C
Peak Gain:	2 dBi
VSWR:	< 2.7:1
Impedance:	50 Ohms
Frequency Bands:	690 - 960 MHz 1710 - 2170 MHz 2500 - 2700 MHz
Polarization:	Linear

## **Key Specifications - Mechanical**

Dimensions:	80 mm x 22mm x 0.3mm (without cable and connector)
Cable:	100mm x 1.13mm coax
Connector:	UFL/IPEX
Mounting method:	Designed for embedded use

### **VSWR**

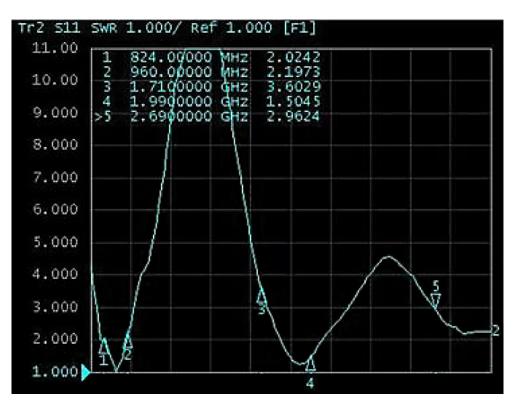

sales

email

web

+44(0)118 976 9000 sales@siretta.com www.siretta.com