ignion^w

Your innovation. Accelerated.

Micro Reach XtendTM (NN01-110)



Micro Reach XtendTM (NN01-110) – Bluetooth®, Zigbee®, 802.11 b/g/n WLAN (2.4 – 2.5 GHz)

Ignion specializes in enabling effective mobile communications. Using Ignion technology, we design and manufacture optimized antennas to make your wireless devices more competitive. Our mission is to help our clients develop innovative products and accelerate their time to market through our expertise in antenna design, testing and manufacturing.

The Micro Reach Xtend™ chip antenna is a very small size and low-cost antenna that combines reduced clearance area required within the customer PCB with its high performance and integration flexibility. The Micro Reach Xtend™ antenna is built on glass epoxy substrate. This makes it ideal for small consumer electronics devices such as small wireless headsets and highly integrated multifunction mobile handsets.

Taking advantage of the space-filling properties, this small monopole antenna is perfect to use within indoor (highly scattered) environment.

Product Benefits

Small form factor

Allows integration into space limited areas easily and efficiently with minimum clearance area.

Low cost

Enables product developers to reduce BoM cost increasing device competitiveness.


Omnidirectional pattern

Optimizes device usage due to a uniform radiation pattern.

• Broad bandwidth

Ensures robust performance when considering different plastic housing and close body proximity.

4.1 mm x 2.0 mm x 1.0 mm (image larger than real size)




PAT US 7,148,850, US 7,202,822

Last Update: January 2021



VSWR and Total Efficiency (%) vs. Frequency (GHz)

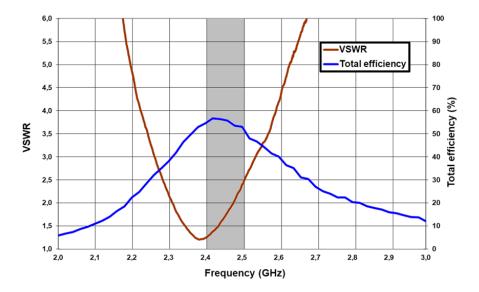

Technical Features	
Frequency range	2.4 GHz – 2.5 GHz
Average Efficiency	> 55 %
Peak Gain	0.2 dBi
Radiation Pattern	Omnidirectional
VSWR	< 2.5:1
Polarization	Linear
Weight (approx.)	0.02 g
Temperature	-40 to + 125° C
Impedance	50 Ω
Dimensions (L x W x H)	4.1 mm x 2.0 mm x 1.0 mm

Measures from the evaluation board (40.0 mm x 20.0 mm x 1.0 mm)

See pictures of the evaluation boards, matching network configuration and graphs of the specs in the <u>user manual</u>.

For additional information, please visit www.ignion.io or contact info@ignion.io.

If you need assistance to design your matching network, please contact support@ignion.io, or try our free-of-charge¹ NN Wireless Fast-Track design service, you will get your chip antenna design including a custom matching network for your device in 24h¹. Other related to NN's range of R&D services is available at: https://www.ignion.io/rdservices/

٠

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: https://www.ignion.io/fast-track-project/