

DAISY-MINI-WW

~65° wide beam

SPECIFICATION:

Dimensions	x mm
Height	0 mm
Fastening	pin, screw, snaps
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
F17031_DAISY-MINI-WW	Linear lens	PMMA	clear	
F17667_DAISY-MINI-SHD-MET-MATT	Shade	PC	metal	matt
F17666_DAISY-MINI-SHD-MET	Shade	PC	metal	gloss
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	PC	white	matt
F17034_DAISY-MINI-SHD-MATT	Shade	PC	black	matt
F17033_DAISY-MINI-SHD-WHT	Shade	PC	white	gloss
F17028_DAISY-MINI-SHD	Shade	PC	black	gloss


ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1

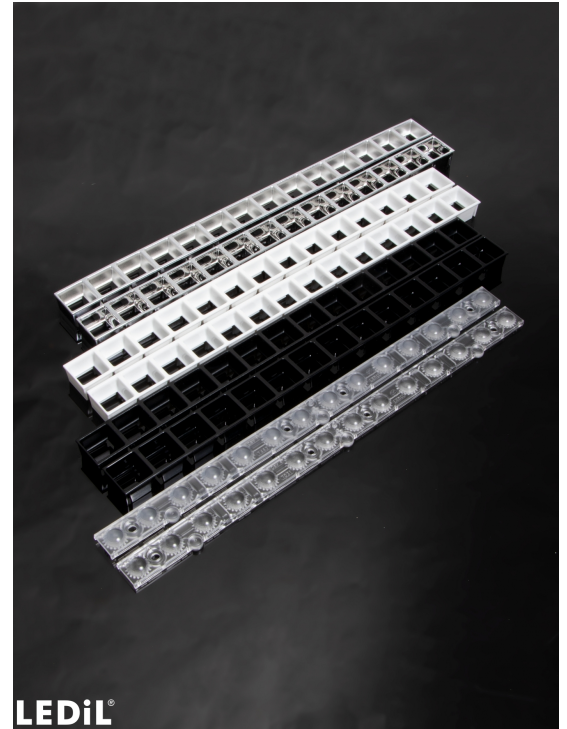

Component		Qty in box	MOQ	MPQ	Box weight (kg)
F17031_DAISY-MINI-WW	Linear lens	252	252	12	5.9
» Box size: 398 x 298 x 265 mm					
F17667_DAISY-MINI-SHD-MET-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17034_DAISY-MINI-SHD-MATT	Shade	252	252	4	6.1
» Box size: 398 x 298 x 265 mm					
F17028_DAISY-MINI-SHD	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17666_DAISY-MINI-SHD-MET	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17033_DAISY-MINI-SHD-WHT	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					


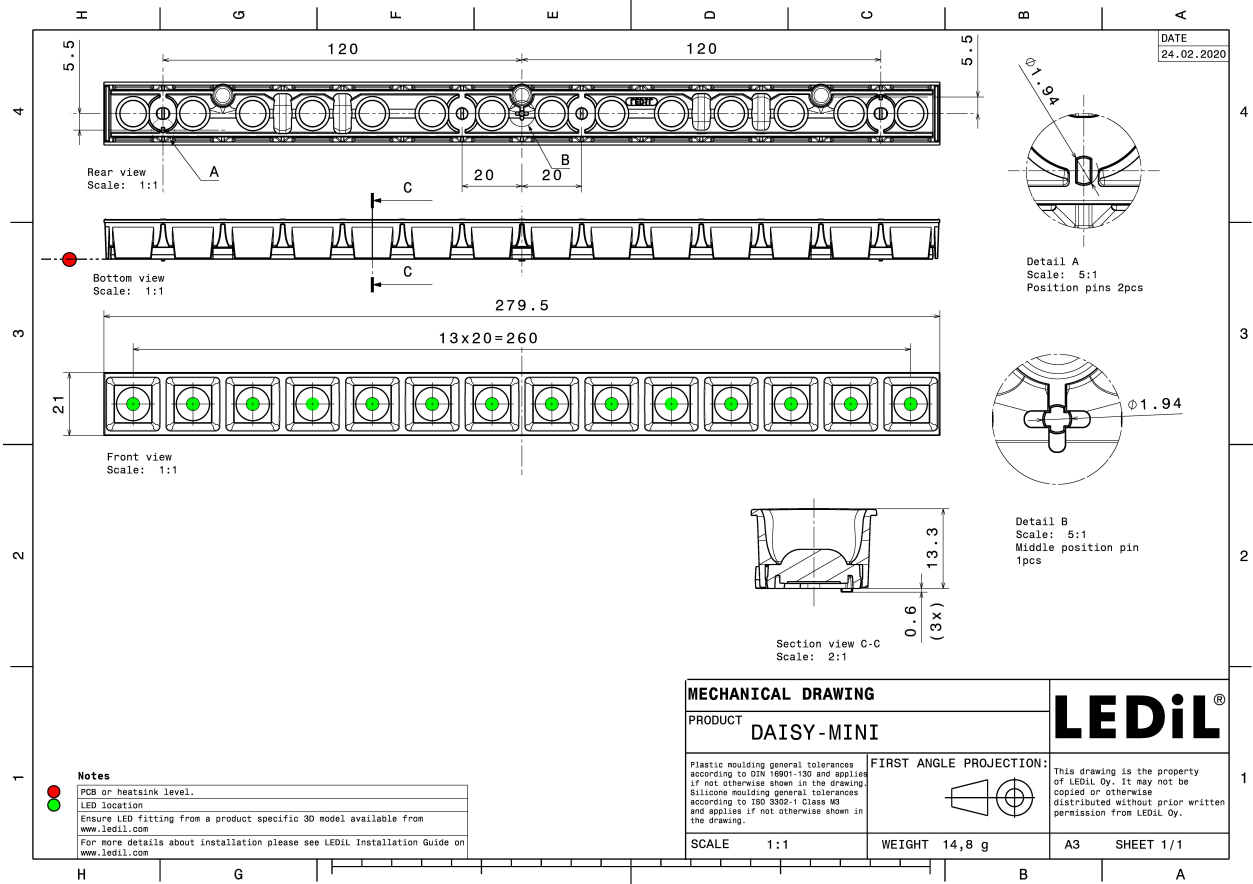


See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):





LED J Series 2835
 FWHM / FWTM 63.0° / 76.0°
 Efficiency 89 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

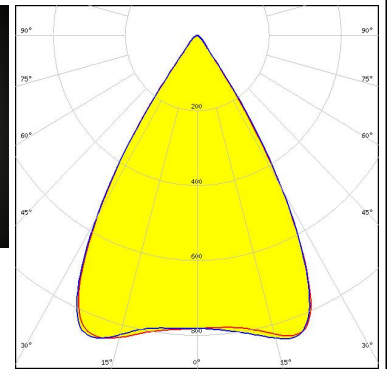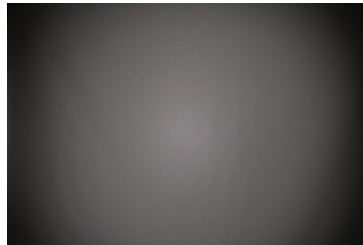



LED Opticus Daisy Mini M L28W2
 FWHM / FWTM 63.0° / 74.0°
 Efficiency 80 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

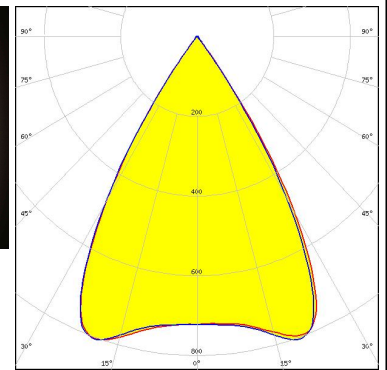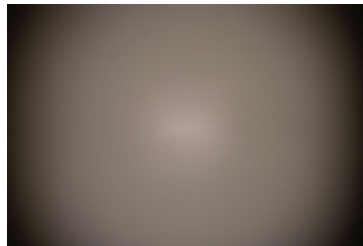

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 61.0° / 84.0°
 Efficiency 91 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

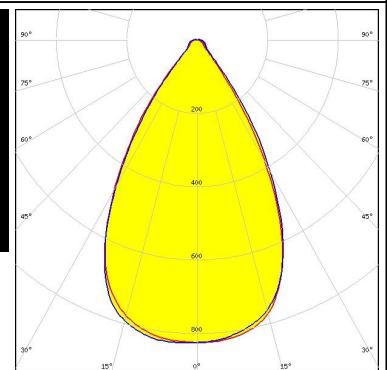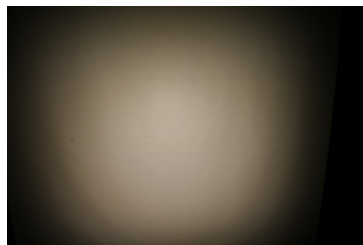



LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 61.0° / 82.0°
 Efficiency 78 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

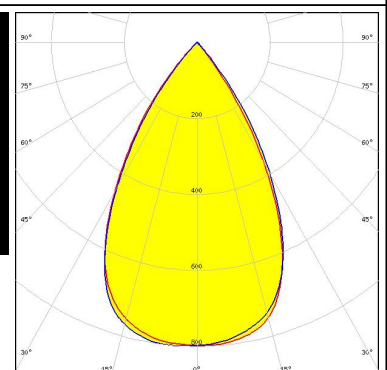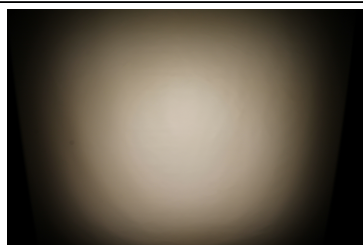

OPTICAL RESULTS (MEASURED):



MST Your solutions

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 63.0° / 84.0°
 Efficiency 91 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

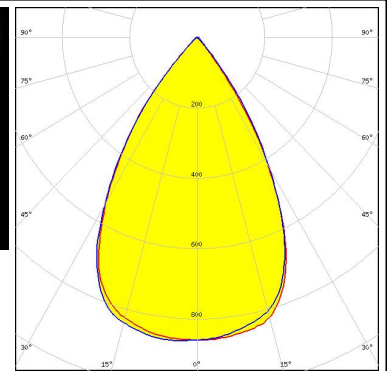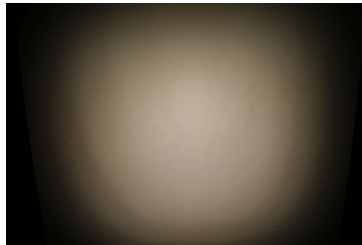



MST Your solutions

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 62.0° / 85.0°
 Efficiency 91 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

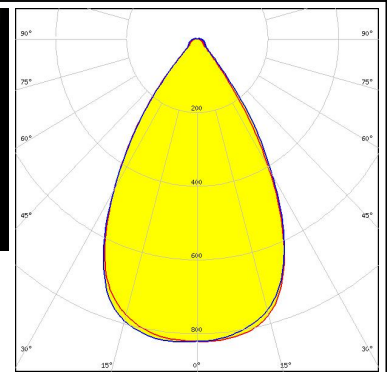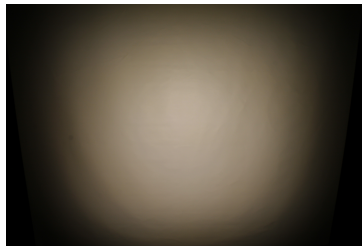



MST Your solutions

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 62.0° / 85.0°
 Efficiency 90 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

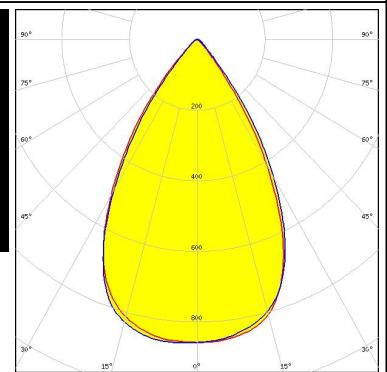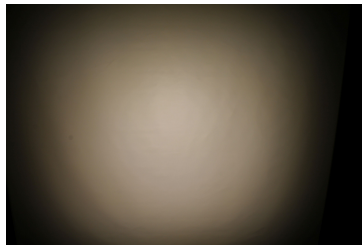

MST Your solutions



LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 60.0° / 82.0°
 Efficiency 78 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

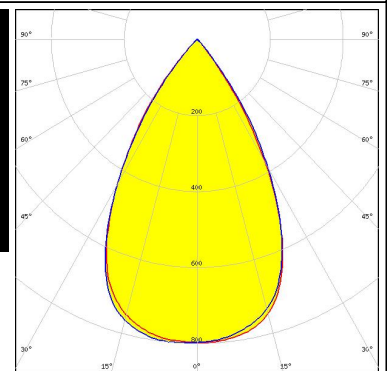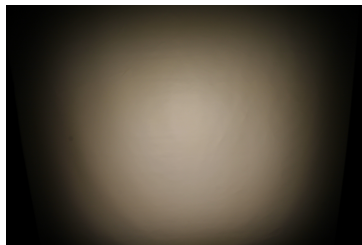

OPTICAL RESULTS (MEASURED):



TRIDONIC

LED LLE 20x280mm 750lm 827-865 LV MD ADV1
 FWHM / FWTM 60.0° / 82.0°
 Efficiency 80 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

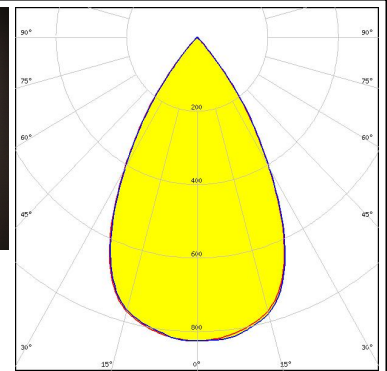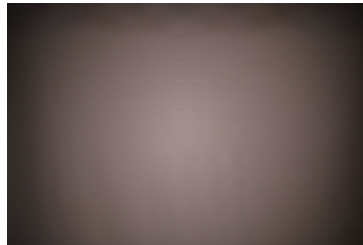



TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 63.0° / 94.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

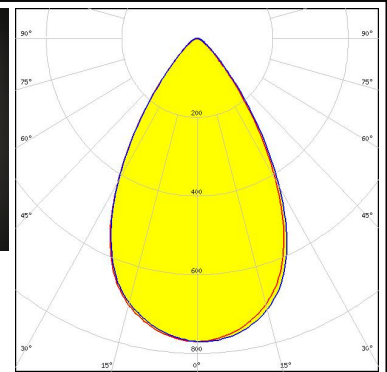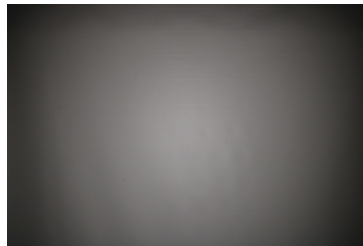



TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 59.0° / 82.0°
 Efficiency 79 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

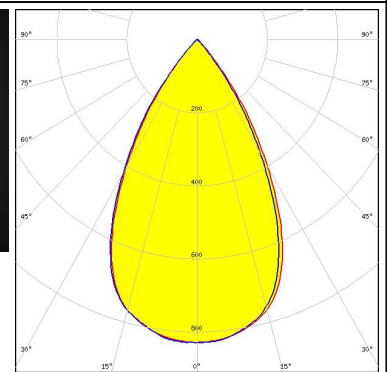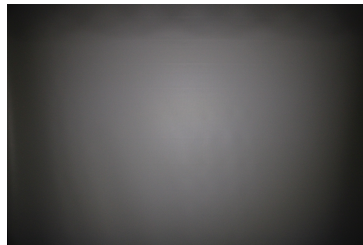

TRIDONIC



LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 60.0° / 86.0°
 Efficiency 69 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

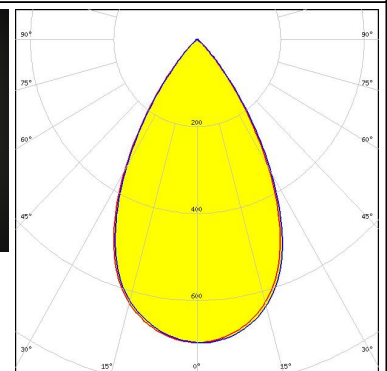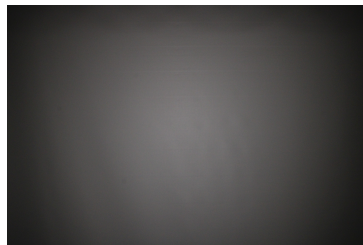

OPTICAL RESULTS (MEASURED):



TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 62.0° / 92.0°
 Efficiency 89 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

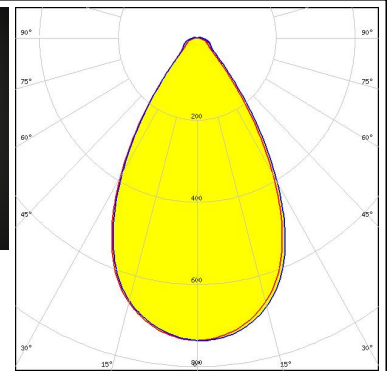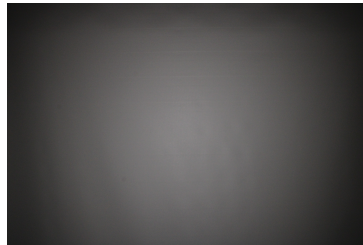



TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 65.0° / 92.0°
 Efficiency 89 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

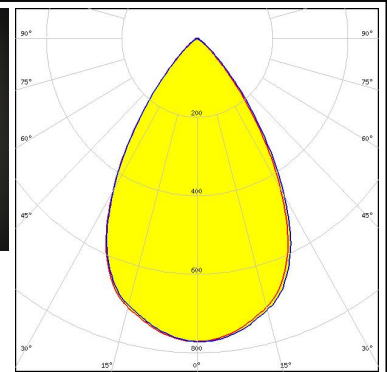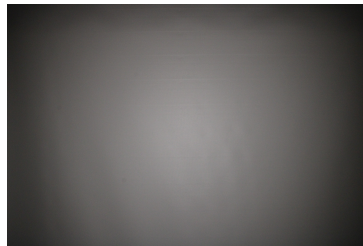

TRIDONIC


LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 62.0° / 93.0°
 Efficiency 89 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

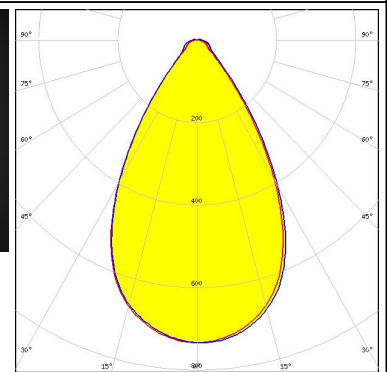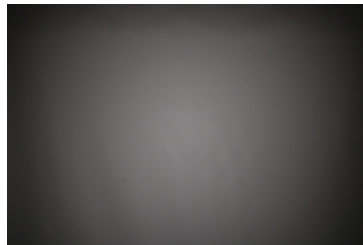


OPTICAL RESULTS (SIMULATED):




LED XQ-E HI
 FWHM / FWTM 66.0° / 76.0°
 Efficiency 76 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17034_DAISY-MINI-SHD-MATT

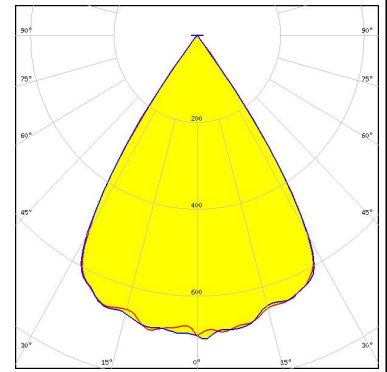


LED XQ-E HI
 FWHM / FWTM 68.0° / 76.0°
 Efficiency 89 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17666_DAISY-MINI-SHD-MET

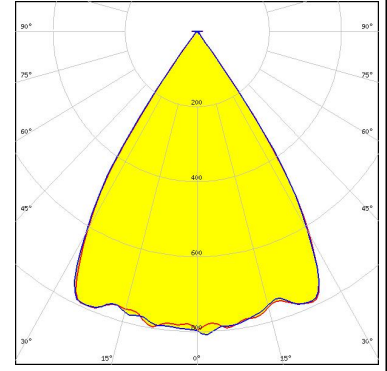

LED LUXEON 2835 Line
 FWHM / FWTM 57.0° / 84.0°
 Efficiency 83 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17034_DAISY-MINI-SHD-MATT

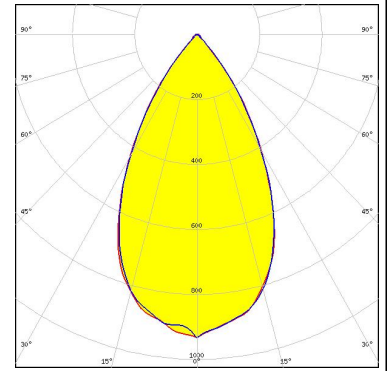


LED LUXEON 5050 HE
 FWHM / FWTM 62.0° / 82.0°
 Efficiency 82 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISY-MINI-SHD

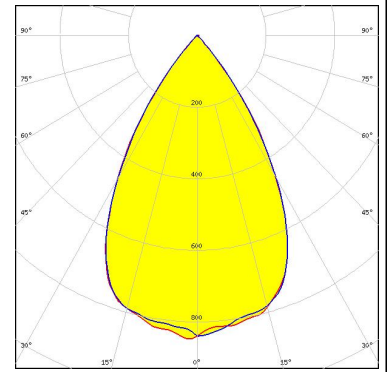

OPTICAL RESULTS (SIMULATED):


LUMILEDS

LED LUXEON 5050 HE
 FWHM / FWTM 62.0° / 82.0°
 Efficiency 83 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

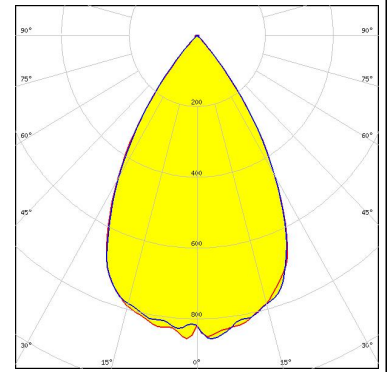


LUMILEDS

LED LUXEON 5050 HE
 FWHM / FWTM 64.0° / 84.0°
 Efficiency 90 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

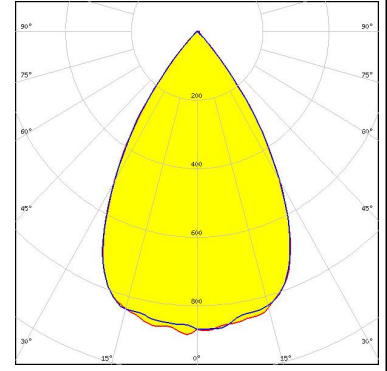


LUMILEDS

LED LUXEON HL1Z
 FWHM / FWTM 60.0° / 70.0°
 Efficiency 83 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

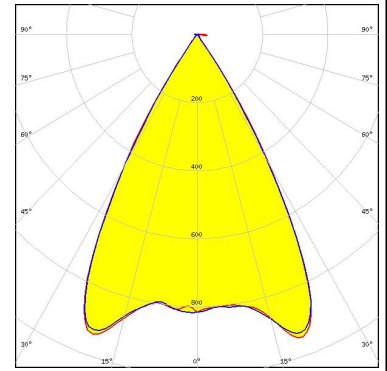

NICHIA

LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 66.0° / 78.0°
 Efficiency 85 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour Tunable White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

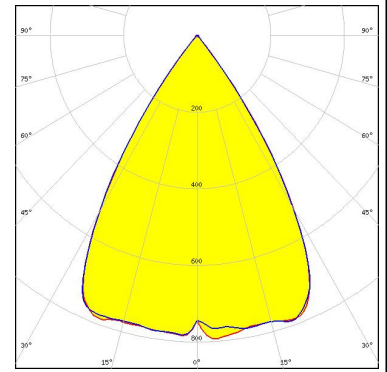

OPTICAL RESULTS (SIMULATED):


<p>NICHIA</p> <p>LED NFSWE11A FWHM / FWTM 58.0° / 74.0° Efficiency 77 % Peak intensity 0.9 cd/lm LEDs/each optic 4 Light colour White Required components: F17028_DAISSY-MINI-SHD</p>	
<p>NICHIA</p> <p>LED NFSx757G FWHM / FWTM 64.0° / 76.0° Efficiency 85 % Peak intensity 0.8 cd/lm LEDs/each optic 1 Light colour White Required components: F17028_DAISSY-MINI-SHD</p>	
<p>NICHIA</p> <p>LED NFSx757G FWHM / FWTM 64.0° / 78.0° Efficiency 92 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: F17033_DAISSY-MINI-SHD-WHT</p>	
<p>NICHIA</p> <p>LED NFSx757G FWHM / FWTM 64.0° / 78.0° Efficiency 90 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components: F17666_DAISSY-MINI-SHD-MET</p>	

OPTICAL RESULTS (SIMULATED):

OSRAM


Opto Semiconductors

LED Duris E 2835
 FWHM / FWTM 64.0° / 78.0°
 Efficiency 92 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

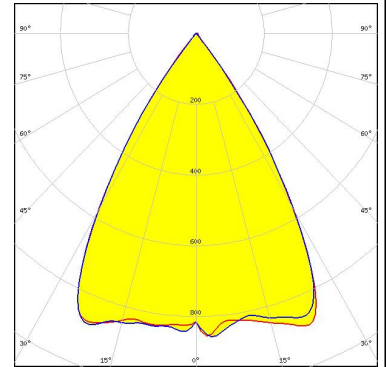


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 76.0° / 93.0°
 Efficiency 70 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17028_DAISSY-MINI-SHD

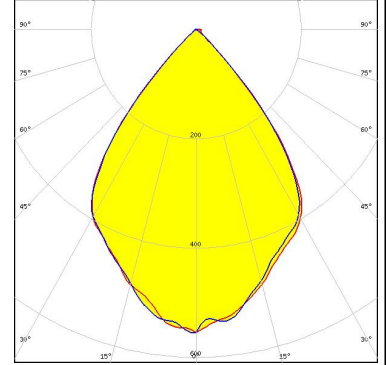


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 76.0° / 93.0°
 Efficiency 70 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

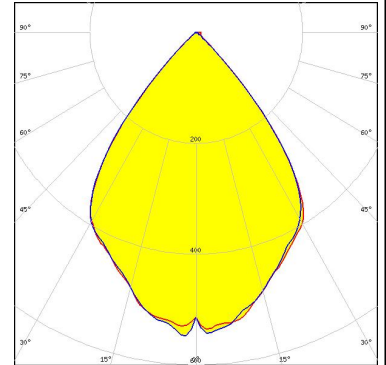

SAMSUNG


LED LM28xB Series
 FWHM / FWTM 76.0° / 94.0°
 Efficiency 77 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

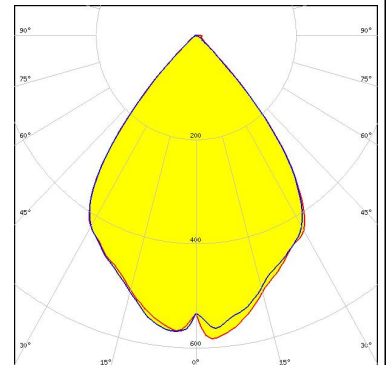

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 76.0° / 94.0°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

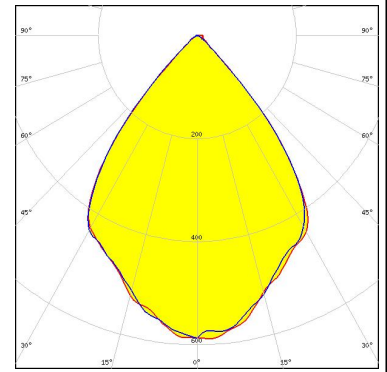


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 76.0° / 94.0°
 Efficiency 77 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

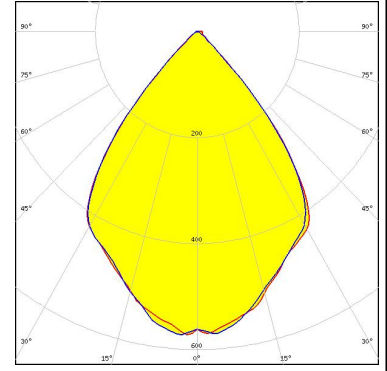


SAMSUNG

LED LM28xB Series
 FWHM / FWTM 76.0° / 97.0°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 2
 Light colour White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

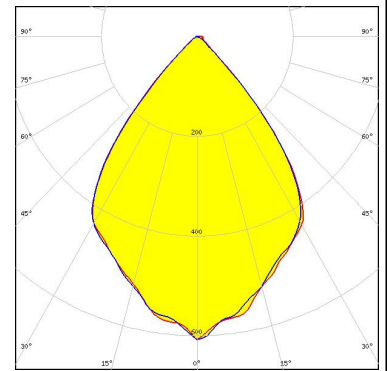

SAMSUNG


LED LM302D
 FWHM / FWTM 64.0° / 76.0°
 Efficiency 89 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

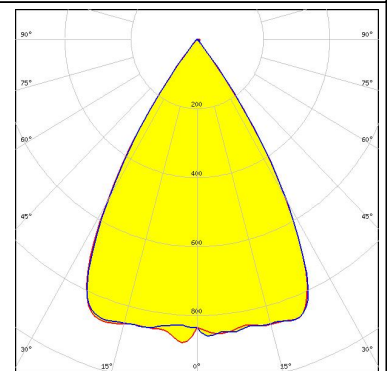

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LM302D
FWHM / FWTM 64.0° / 76.0°
Efficiency 83 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17028_DAISY-MINI-SHD

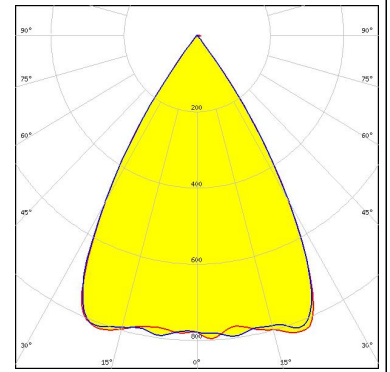

SEOUL SEMICONDUCTOR

LED SEOUL 3030
FWHM / FWTM 66.0° / 78.0°
Efficiency 85 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17028_DAISY-MINI-SHD

