

## HR Series – General Purpose LVDT



- High Reliability
- Large core-to-bore clearance
- Stroke ranges from  $\pm 0.05$  to  $\pm 10$  inches
- AC operation from 400Hz to 5kHz
- Stainless steel housing
- Imperial or metric threaded core
- Many options and accessories

### DESCRIPTION

The **HR Series** general purpose LVDTs provide the optimum performance required for a majority of applications. The large 1/16 inch [1.6mm] bore-to-core radial clearance provides for ample installation misalignments and therefore reduces the application costs. Featuring a high output voltage and a broad operating frequency range, these versatile and highly reliable LVDTs deliver worry-free and precise position measurements.

Available in a variety of stroke ranges from  $\pm 0.05$  to  $\pm 10$  inches, the HR Series can be configured with a number of standard options including guided core, small diameter/low mass core. High temperature (200°C) operation and Mild Radiation Resistance versions are also available (*consult factory*). The HR Series is compatible with the full line of Measurement Specialties LVDT signal conditioners.

Like in most of our LVDTs, the HR windings are vacuum impregnated with a specially formulated, high temperature, flexible resin, and the coil assembly is potted inside its housing with a two-component epoxy. This provides excellent protection against hostile environments such as high humidity, vibration and shock.

Measurement Specialties, Inc. (NASDAQ MEAS) offers many other types of sensors and signal conditioners. Data sheets can be downloaded from our web site at: <http://www.meas-spec.com/datasheets.aspx>

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

### FEATURES

- 0.25% linearity (100% stroke)
- Large 1/16" core-to-bore clearance
- Shock and vibration tolerant
- Electromagnetic/electrostatic shielding
- High temperature (220°C) version available
- Calibration certificate supplied with each unit

### APPLICATIONS

- Process control
- Factory automation
- Materials testing
- Metrology
- Applications with large misalignments
- General industrial

# HR Series – General Purpose LVDT

## PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS												
Parameter	HR 050	HR 100	HR 200	HR 300	HR 500	HR 1000	HR 2000	HR 3000	HR 4000	HR 5000	HR 7500	HR 10000
Stroke range	±0.05 [±1.27]	±0.1 [±2.54]	±0.2 [±5.08]	±0.3 [±7.62]	±0.5 [±12.7]	±1 [±25.4]	±2 [±50.8]	±3 [±76.2]	±4 [±101.6]	±5 [±127]	±7.5 [±190.5]	±10 [±254]
Sensitivity V/V/inch [mV/V/mm]	5.8 [228]	4.2 [165]	2.5 [98.4]	1.3 [51.2]	0.7 [27.6]	0.39 [15.4]	0.23 [9.1]	0.25 [9.8]	0.20 [7.9]	0.14 [5.5]	0.13 [5.1]	0.07 [2.8]
Output at stroke ends, mV/V (*)	290	420	500	390	350	390	460	750	800	700	975	700
Phase shift	-1°	-5°	-4°	-11°	-1°	-3°	+5°	+11°	+1°	+3°	+1°	-5°
Input impedance (PRIMARY)	430Ω	1070Ω	1150Ω	1100Ω	460Ω	460Ω	330Ω	315Ω	275Ω	310Ω	260Ω	550Ω
Output impedance (SECONDARY)	4000Ω	5000Ω	4000Ω	2700Ω	375Ω	320Ω	300Ω	830Ω	400Ω	400Ω	905Ω	750Ω
Non-linearity	±% of FR											
@ 50% stroke	0.10	0.10	0.10	0.10	0.15	0.15	0.15	0.15	0.15	0.15	/	0.15
@100% stroke (maximum)	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>	<b>0.25</b>
@125% stroke	0.25	0.25	0.25	0.35	0.35	1.00	0.50 (**)	0.50 (**)	0.50 (**)	1.00 (**)	/	1.00 (**)
@150% stroke	0.50	0.50	0.50	0.50	0.75	1.30 (**)	1.00 (**)	1.00 (**)	1.00 (**)	/	/	/
Input voltage	3 VRMS sine wave											
Input frequency	400Hz to 5kHz											
Test frequency	2.5kHz											
Null voltage	0.5% of FRO, maximum											

ENVIRONMENTAL SPECIFICATIONS & MATERIALS	
Operating temperature	-65°F to +300°F [-55°C to 150°C]
Shock survival	1,000 g (11ms half-sine)
Vibration tolerance	20 g up to 2KHz
Housing material	AISI 400 Series stainless steel
Electrical connection	Six lead-wires, 28 AWG stranded Copper, PTFE insulated, 1 foot [30cm] long ( <i>longer wires optional</i> )
IEC 60529 rating	IP61

**Notes:**

Dimensions are in inch [mm]

All values are nominal unless otherwise noted

Electrical specifications are for the test frequency indicated in the table

FR: Full Range is the stroke range, end to end; FR=2xS for ±S stroke range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range


(\*) Unit for output at stroke ends is millivolt per volt of excitation (input voltage)

(\*\*) Requires special reduced core length

# HR Series – General Purpose LVDT


## MECHANICAL SPECIFICATIONS

Parameter	HR 050	HR 100	HR 200	HR 300	HR 500	HR 1000	HR 2000	HR 3000	HR 4000	HR 5000	HR 7500	HR 10000
Body length "A"	1.13 [28.7]	1.81 [46.0]	2.50 [63.5]	3.22 [81.8]	5.50 [139.7]	6.63 [168.4]	10.00 [254]	12.82 [325.6]	15.64 [397.3]	17.88 [454.2]	24.09 [611.9]	30.85 [783.6]
Core length "B"	0.80 [20.3]	1.3 [33.0]	1.65 [41.9]	1.95 [49.5]	3.45 [87.6]	4.00 [101.6]	5.30 [134.6]	5.60 [142.2]	7.00 [177.8]	7.00 [177.8]	7.00 [177.8]	8.50 [215.9]
Body weight, oz [g]	1.13 [32]	1.69 [48]	2.12 [60]	2.72 [77]	3.85 [109]	4.45 [126]	5.93 [168]	7.94 [225]	10.41 [295]	11.99 [340]	16.16 [458]	20.46 [580]
Core weight, oz [g]	0.14 [4]	0.21 [6]	0.28 [8]	0.35 [10]	0.64 [18]	0.74 [21]	0.95 [27]	0.99 [28]	1.27 [36]	1.27 [36]	1.27 [36]	1.52 [43]

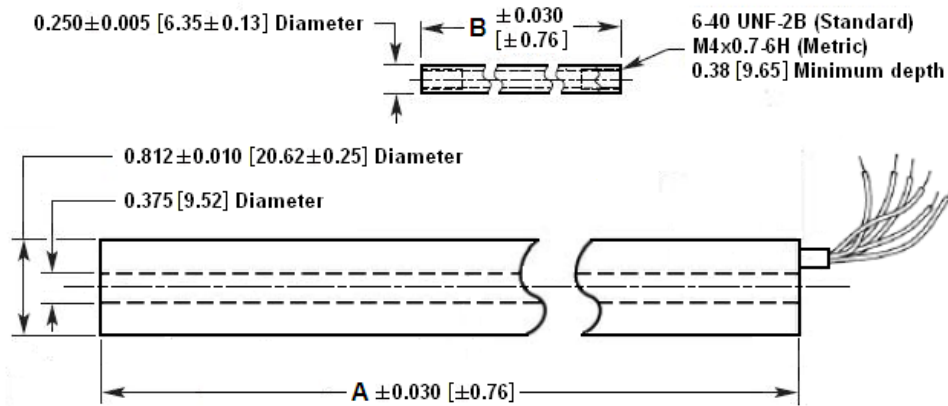

Dimensions are in inch [mm]

## WIRING INFORMATION

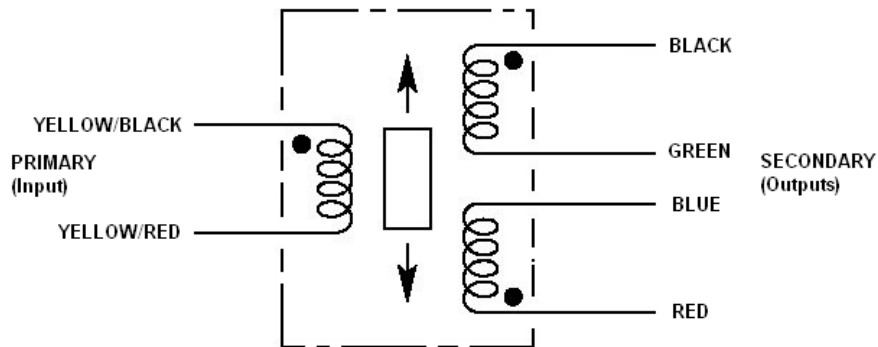

Connect blue (BLU) to green (GRN) for differential output