

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		C	—	05-04-02	CB	CB
			C1	ECR-10-004467	10-03-10	GSK	MKO

P.C.B. HOLE DIM. ACTION PIN

DRILLED HOLE	: 1,15 ± 0,025 mm
FIN. HOLE	: 0,94 to 1,09 mm
AFTER REFLOW	: 0,91 to 1,09 mm
Cu-thks	: 0,025 to 0,075 mm
SnPb-thks	: 0,004 to 0,010 mm

NOTES:

- 1 MATERIAL CONTACT: PHOSPHORBRONZE.
MATERIAL HOUSING: GLASSFILLED THERM. POLYESTER.
- 2 AT CONTACTAREA Au OVER Ni, PERFORMANCE LEVEL I
ACC. IEC 603-2; REMAINDER Sn
- 3 AT CONTACTAREA AU OVER NI PERFORMANCE LEVEL II
ACC. IEC 603-2; REMAINDER Sn
- 4 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE ON OUTSIDE
OF MATING AREA OF ROW d.
- 5 STAND-OFF RIBS OPTIONAL.

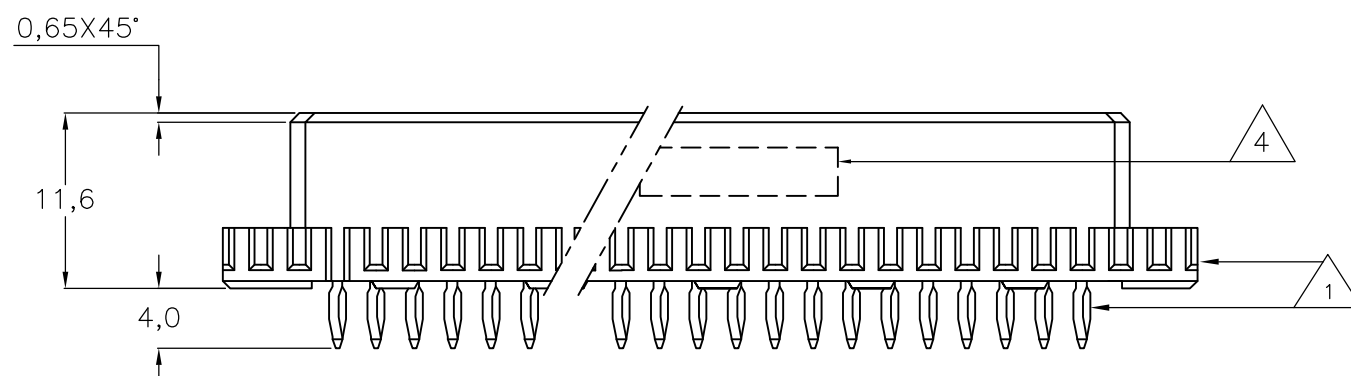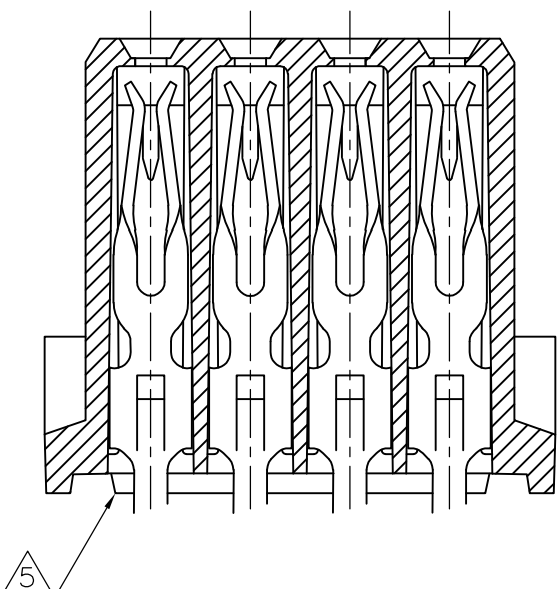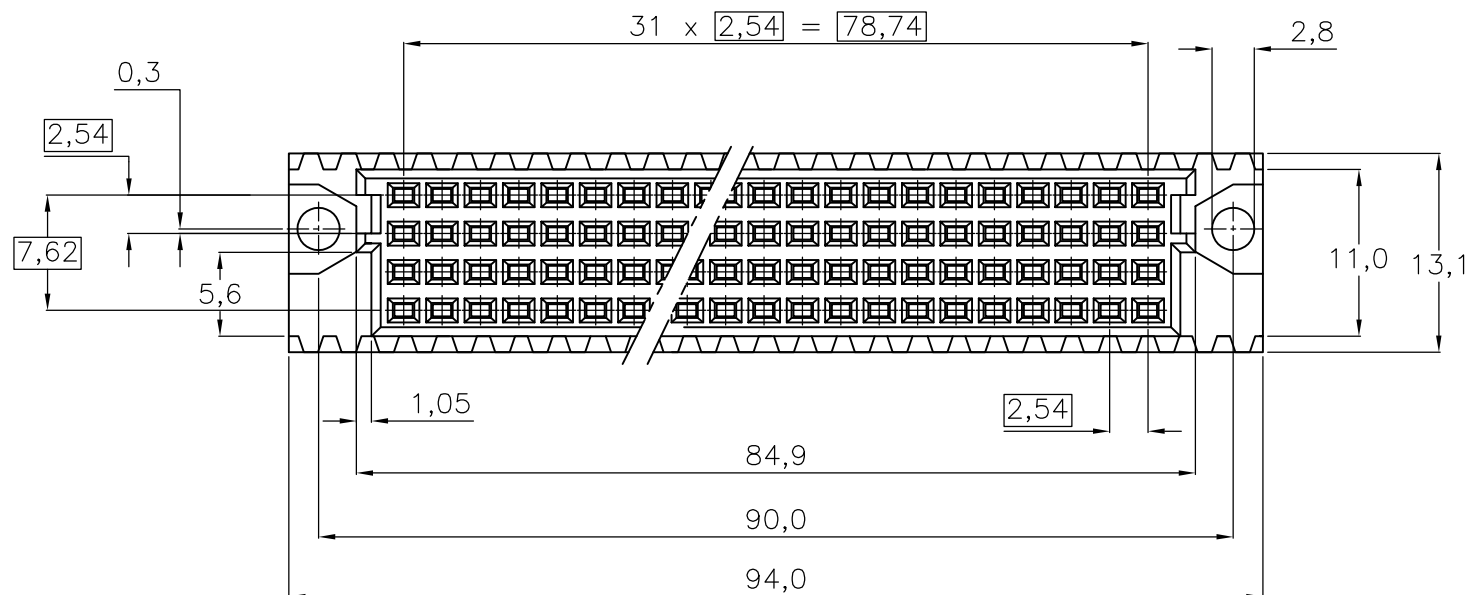

ROW	a	b	c	d
1	X	X	X	X
2	X	X	X	X
3	X	X	X	X
4	X	X	X	X

AN ASTERISK „X” DENOTES A SIGNAL CONTACT.

OBSELETE	3 2	1 1	216415-4 216415-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	Tyco Electronics		Tyco Electronics Corporation EC N.V. Oostkamp - Belgium	
		Colpaert B.	05ARR02	CHK	Colpaert B.	05ARR02
		Colpaert B.	05ARR02	APVD	Colpaert B.	05ARR02
		—		PRODUCT SPEC	—	
		—		APPLICATION SPEC	—	
		—		WEIGHT	—	
		CUSTOMER DRAWING		NAME	4X32 POS FEMALE B.T.B CONN. ASS'Y FOR 1,6mm P.C.BOARD THK'S	
		MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO
—	—	—	—	A3	00779	C-216415
		RESTRICTED TO	SCALE	SHEET	1 OF 1	REV
		—	NTS	1		C1