


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5975000221	~

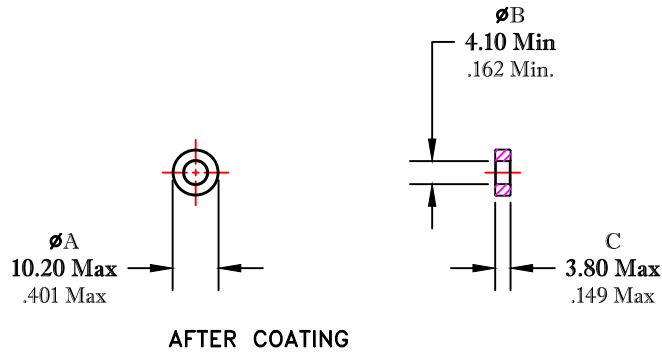


DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS						
$\Sigma l/A(\text{mm}^{-1})$	le (mm)	Ae (mm ²)	Ve (mm ³)	Lo (nH)	AL (nH) @ 10 kHz <10gauss	$\tan \delta/\mu_1$ @ 100 kHz <1gauss
2.8549	20.7	7.25	150	0.440	2200±20%	≤20X10E-6

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED. USE APPROVED FR# 5975000201.
- 2 - COATING THICKNESS: **0.25mm Max.** [.010" Max.].
- 3 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.

FR# 75

 FAIR-RITE PRODUCTS CORP.						
TITLE COATED TOROID						
DRAWN BY J.SERENCIS	DATE 07-17-2018	SIZE	PART NO.	REV.		
CHKD BY		B	5975000221	~		
APPRVD BY		SCALE	NONE	SHEET	1	of 1