


## ACDBT-54-HF Series

Reverse Voltage: 30 Volts

Forward Current: 200 mA

RoHS Device

Halogen free





### Features

- Fast switching.
- Low turn-on voltage.
- PN junction guard ring for transient and ESD protection.
- Comply with AEC-Q101.

### Mechanical data

- Case: SOT-23, molded plastic.
- Terminals: Solderable per MIL-STD-750, method 2026.
- Weight: 0.0078 grams(approx.).

### Circuit diagram

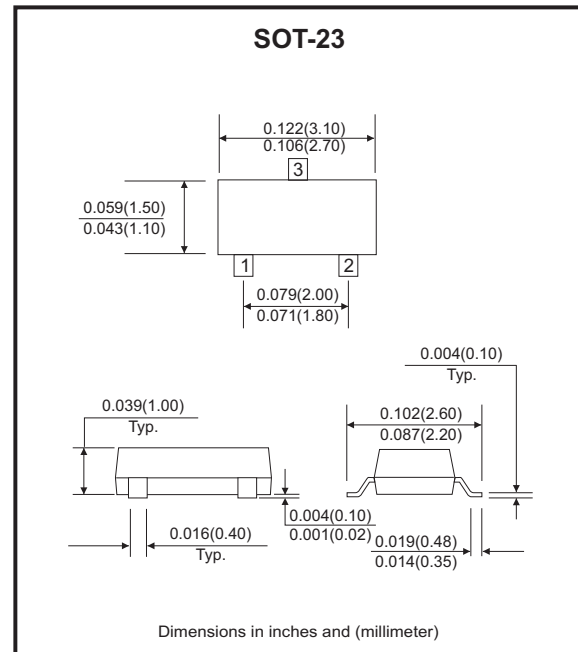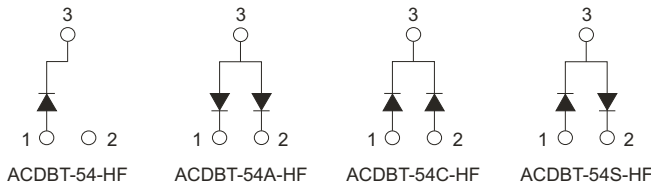

### Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Unit
Peak repetitive peak reverse voltage	$V_{RRM}$		30	V
Working peak reverse voltage	$V_{RWM}$			
DC blocking voltage	$V_R$			
Forward continuous current	$I_F$		200	mA
Repetitive peak forward current	$I_{FRM}$		300	mA
Forward surge current	$I_{FSM}$	@ t<1.0s	600	mA
Power dissipation	$P_D$		200	mW
Thermal resistance	$R_{\theta JA}$	Junction to ambient air	500	°C/W
Operating and storage temperature	$T_J, T_{STG}$		-55 to +125	°C

## Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Reverse breakdown voltage	$V_{(BR)}$	$I_R = 100\mu A$	30			V
Forward voltage	$V_F$	$I_F = 0.1mA$ $I_F = 1mA$ $I_F = 10mA$ $I_F = 30mA$ $I_F = 100mA$			0.24 0.32 0.40 0.50 1.00	V
Reverse current	$I_R$	$V_R = 25V$			2	$\mu A$
Diode capacitance	$C_D$	$V_R = 1V, f = 1.0MHz$			10	pF
Reverse recovery time	$T_{rr}$	$I_F = I_R = 10mA,$ $I_{RR} = 0.1XI_R, R_L = 100\Omega$			5	nS

### RATING AND CHARACTERISTIC CURVES (ACDBT-54-HF Series)

Fig.1 - Forward Characteristics

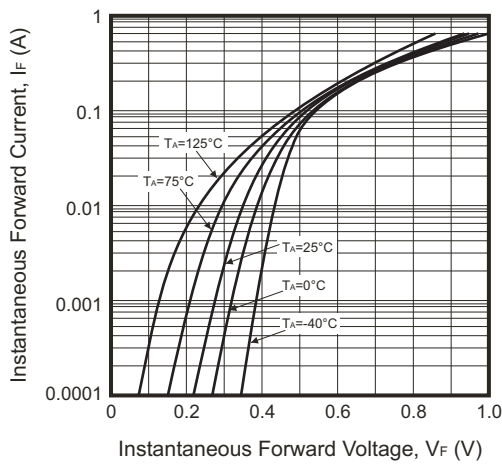


Fig.2 - Typical Reverse Characteristics

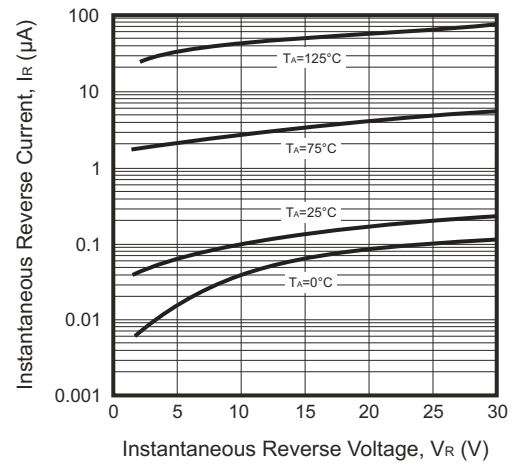


Fig.3 - Typical Capacitance v.s Reverse Voltage


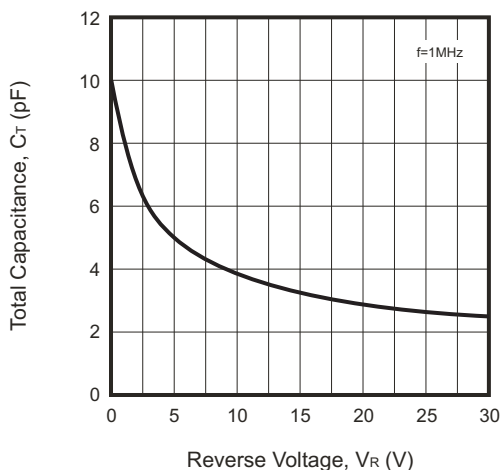






Fig.4 - Power Derating Curve

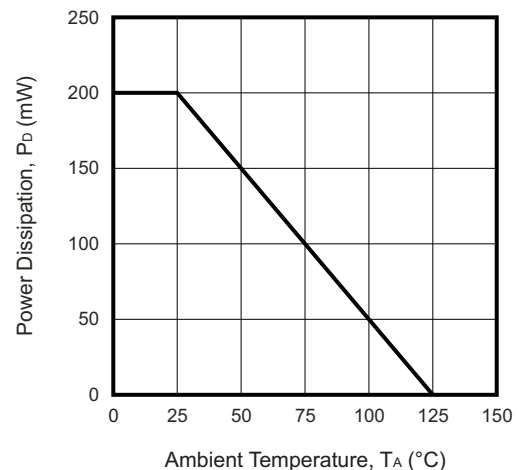

Company reserves the right to improve product design, functions and reliability without notice.

REV: C

## Reel Taping Specification

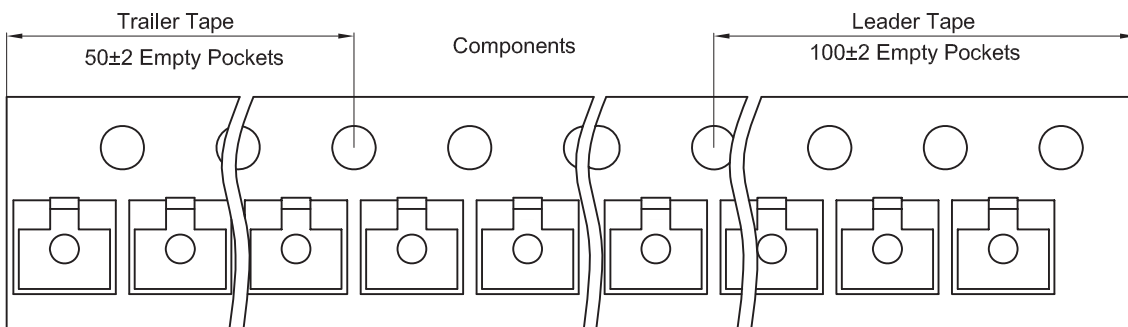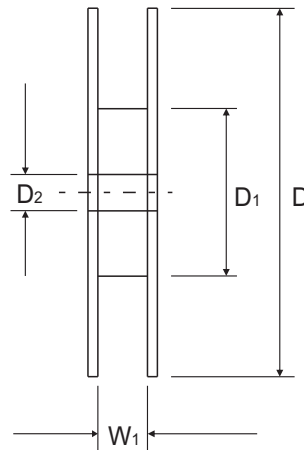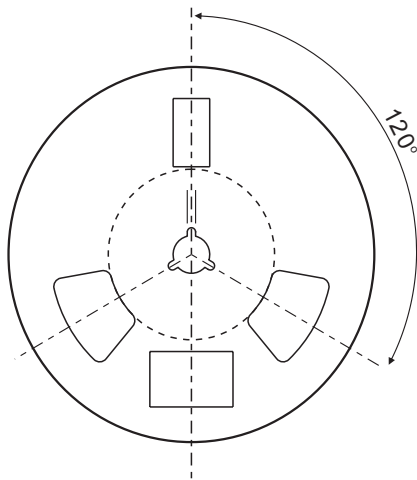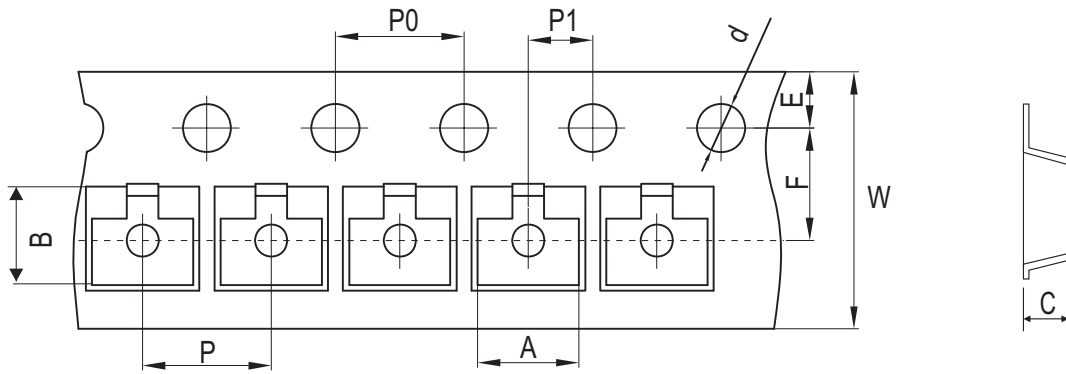

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 + 0.10	178.00 ± 1.00	54.00 ± 0.50	13.00 ± 0.50
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 + 0.004	7.008 ± 0.039	2.126 ± 0.020	0.512 ± 0.020

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 + 0.30 / - 0.10	9.50 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.158 ± 0.004	0.158 ± 0.004	0.079 ± 0.002	0.315 + 0.012 / - 0.004	0.374 ± 0.039

Company reserves the right to improve product design, functions and reliability without notice.

REV: C