

## ADP-NM-NF N(male) to N(female)




Features	
Frequency Range	DC-3GHz
Voltage Standing Wave Ratio	$\leq 1.15$
Impedance	50 $\Omega$
Temperature Range	-55~+155°C
Centre Conductor Retention Range	$\geq 0.28\text{N}$
Coupling nut Retention Force	$\geq 180\text{Nq}$
Insertion Loss	$\leq 0.1\text{dB}/3\text{GHz}$
Durability (mating)	>500 Cycles
Insulation Resistance	$\geq 5000\text{M}\Omega$
Working Voltage	355Vrms
Max Voltage (can withstand)	1000Vrms

Material Information	
Body	Nickel Plate on Brass
Pin/Socket contact	Gold Plate on Brass/Beryllium-Copper
Crimp ferrule	Nickel/gold plated Copper alloy
Insulator	PTFE


### Ordering Information

Part Number	Description
ADP-NM-NF	Adaptor N(male) to N(female)

## VSWR

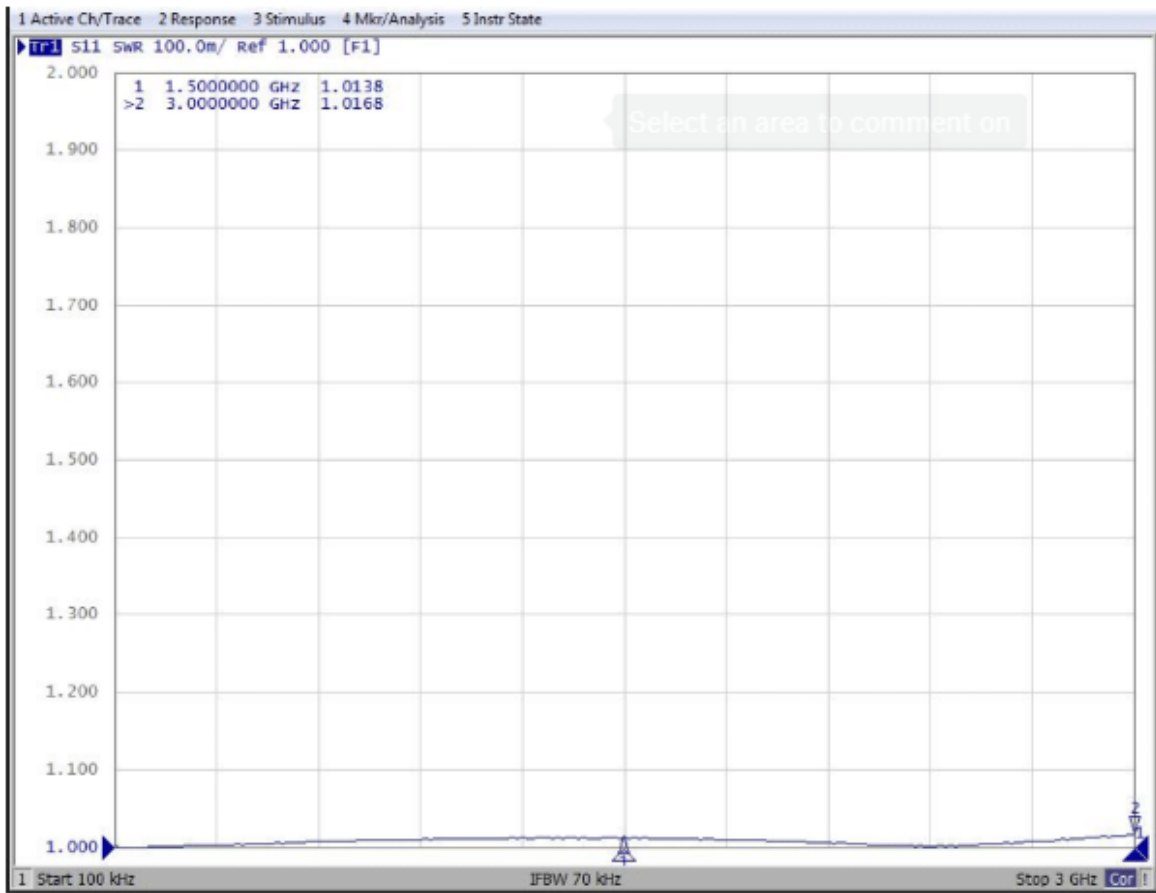

## Insertion Loss

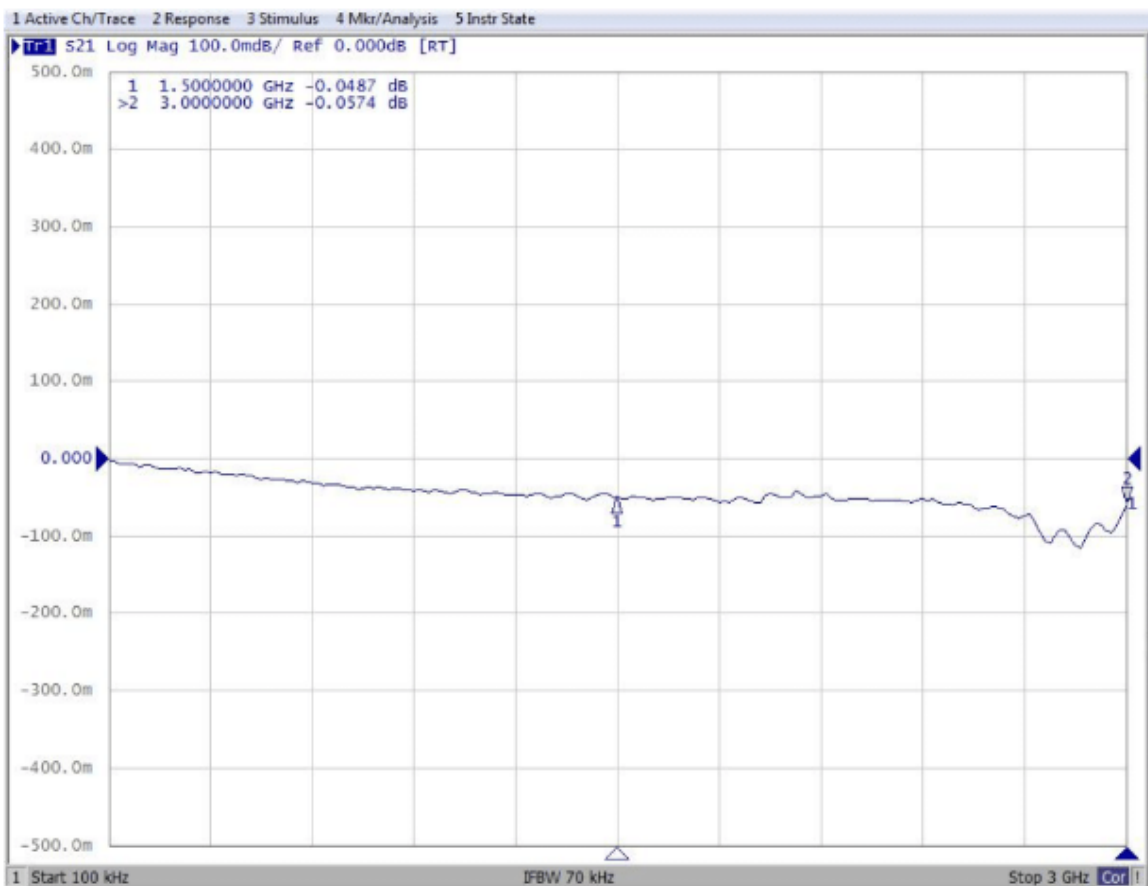

# RF Adaptor



## Mechanical Detail

