
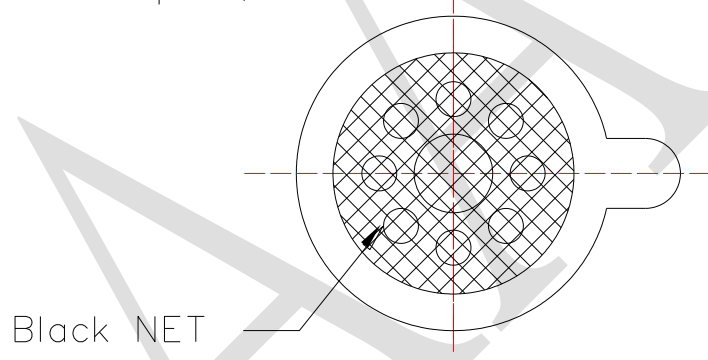
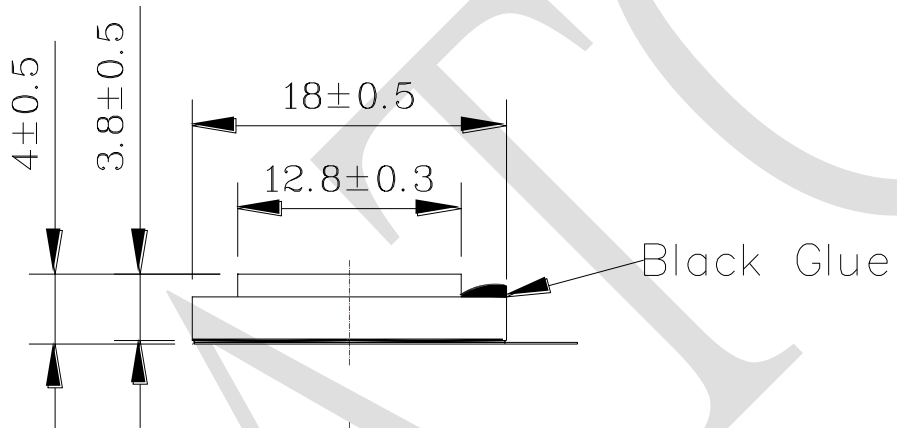


1. SPECIFICATION

AK-180810-PM-1V

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 18 mm	
03	Rated Input Power	1.0 W	
04	Max. Input Power	1.2 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 1KHz 1V	
06	Resonance Frequency (Fo)	1000Hz $\pm 20\%$ at Fo, 1V	
07	Sound pressure level	$92\text{dB}(1.0\text{W}/0.1\text{M}) \pm 3\text{ dB}$	at AVE0.8,1.0, 1.2, 1.5 KHz.
08	Frequency Range	Fo – 5K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 0.1 W.	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

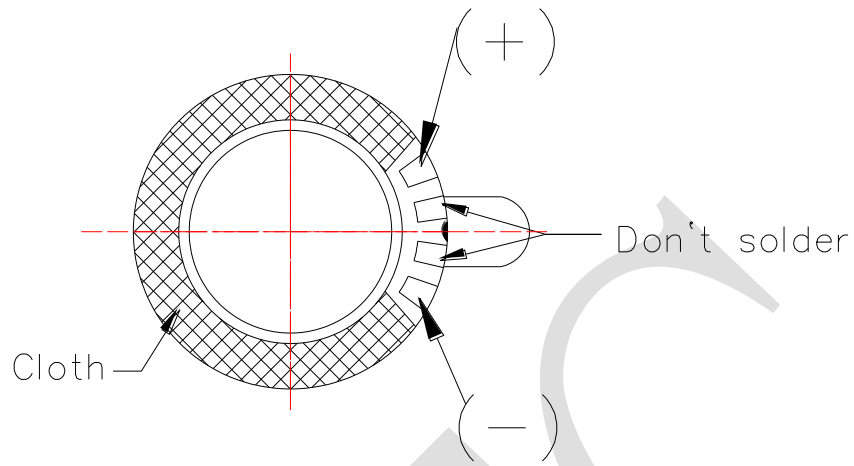

RoHS

TITLE: <i>DYNAMIC SPEAKER</i>		DRAWN: Zak	2019/09/12	SCALE: 2:1	SHEET: 1:1
PART NO. <i>AK-180810-PM-1V</i>		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. <i>CXS18040-R08W1.0-F</i>		CHECKED:	TOLERANCE ± 0.5		
REV 4		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: PBT	ONE PLACE DECIMAL ± ***		
				TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION