
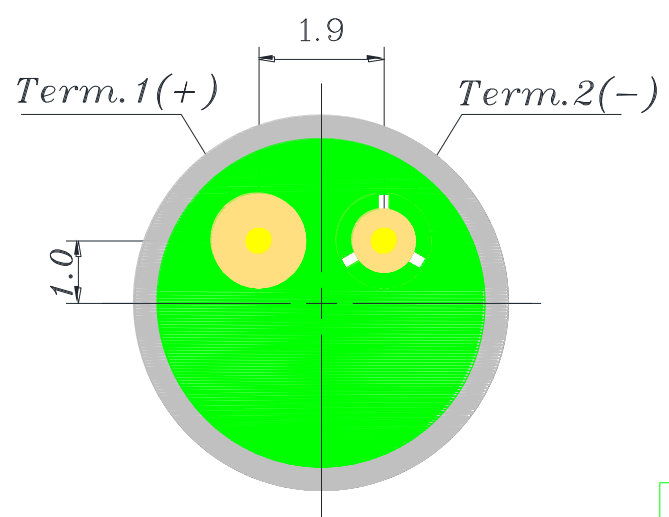
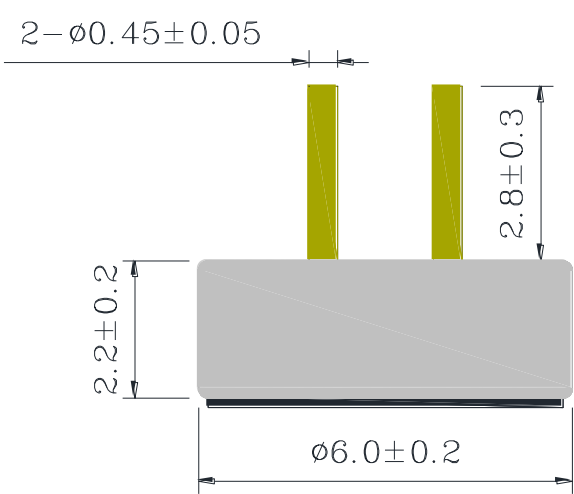


1. SPECIFICATIONS

AMB-O60G44-NB (RoHS)

01	Electret Type	Back type
02	Sensitivity	-44±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	2.0V
04	Output Impedance	2.2KΩ
05	Directivity	Omni directional
06	Frequency Range	100 - 20K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥58dB
11	Sound Pressure Level	110dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

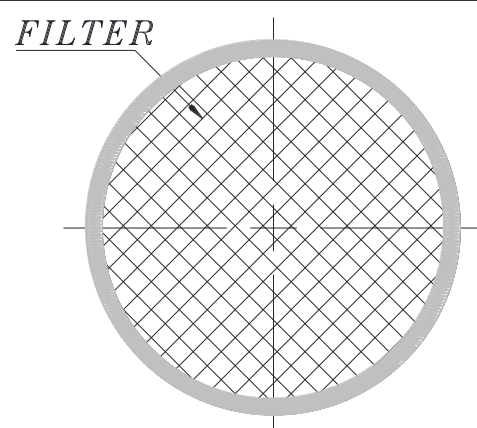

RoHS

TITLE: <i>MICROPHONE</i>	DRAWN: <i>Jason</i> 2009/07/21	SCALE: 5:1	SHEET: 1 of 1
PART NO. <i>AMB-060G44-NB</i>	DESIGNED: R & D OF AAT	UNITS: mm	TOLERANCE ± 0.3
DWG NO. <i>HL-09072104</i>	1	CHECKED:	UNLESS OTHERWISE SPECIFIED:
	REV	APPROVAL:	ONE PLACE DECIMAL ± ***
	MATERIAL: *****		TWO PLACE DECIMAL ± ***
			THREE PLACE DECIMAL ± ***



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION