


pui
audio™ inc
a projects unlimited company

AS01008MR-2-R 10mm Speaker


3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview

- 10 mm diameter speaker with Neodymium magnet for 86 dB sensitivity
- 0.3W continuous, 0.5W maximum power handling and 8Ω impedance
- Mylar diaphragm for moisture resistance and metal housing for protection
- Less than 3 mm thick for space-limited applications

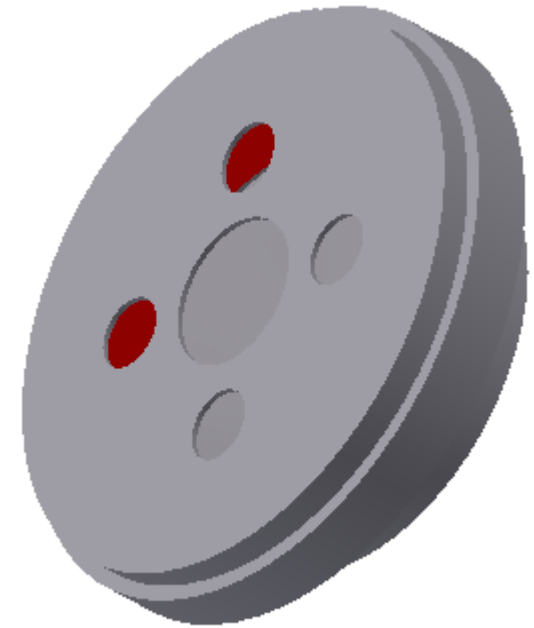


Frequency Response (0.3W @ 10 cm)

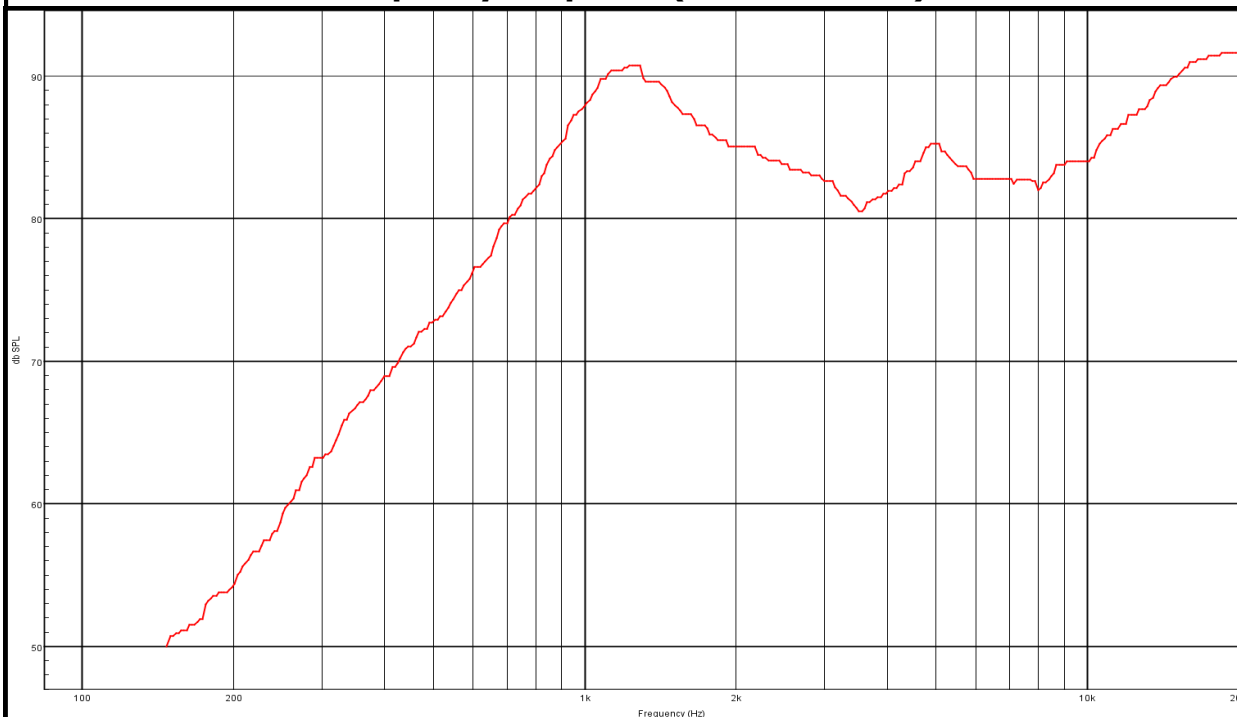

An Initiative of the EICC and GeSI



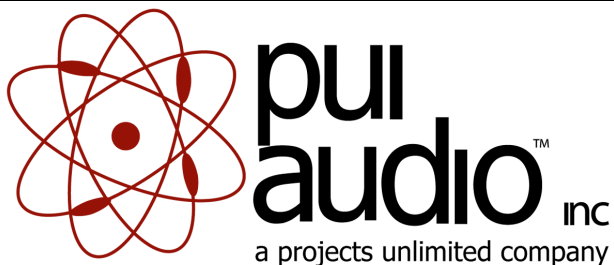

AS01008MR-2-R 10mm Speaker

Mechanical and Environment Testing	
Test Description	Test Condition
High Temperature	55°C with random humidity for 96 hours
Low Temperature	-30°C with random humidity for 96 hours
Humidity	40°C with 90% to 95% relative humidity for 96 hours
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours
Drop Test	75 cm free fall onto 40 mm thick board, 10 cy-
Temperature Cycle Test	-30°C to 60°C, 5 cycles

After tests, speaker shall rest for 1 hours. SPL shall not deviate ± 3 dB from pre-test measurement.

