

Military Fuseholders


Panel Mount

FHN42W


HWA-AF



Dimensional Data

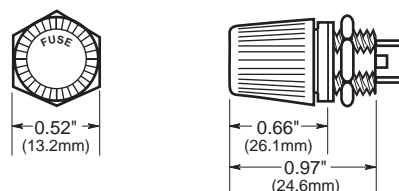

MOUNTING HOLE ± 0.002 "
(0.5mm)



CATALOG SYMBOL: FHN42W
 PANEL MOUNT
 MEETS MILITARY SPECIFICATION - MIL-F-19207/26
 NO AGENCY LISTINGS
 FOR MILITARY FUSES: FM01 SERIES
 COMMERCIAL EQUIVALENT: HWA-AF
 SUB-MINIATURE FOR LIMITED SPACE APPLICATIONS

Specifications

| | |
|------------------|-------------------------|
| Knob | Screw type. |
| Terminals | Solder lug type. |
| Enclosure | Watertight. |
| Panel Thickness | 0.125 Max. |
| Rating | 5 amperes. 125 volts. |
| Body and Knob | MAI-60 or MIL-M-14 |
| Material | Grey Diallyl Phthalate. |
| Temperature Rise | 45°C Max. |
| Fuses | Per MIL-23419/1 FM01. |

Qualified and tested per MIL-F-19207. Group A, B and C.

| | |
|-----------------|------------------------------------|
| Mechanical | MIL-STD-202. Method 207. Method I. |
| Shock | |
| Torque Capacity | 4 lbs.-inches. |
| Mounting Torque | 10 lbs.-inches. |

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.