


CDSW19-G/20-G/21-G

High Speed
RoHS Device




Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications

Mechanical data

- Case: SOD-123, Molded Plastic
- Terminals: Solderable per MIL-STD-202, Method 208
- Weight: 0.01 gram(approx.).

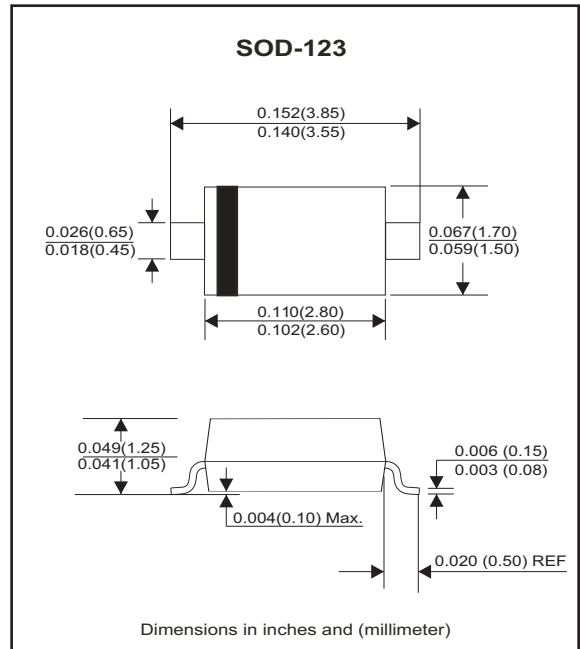

Maximum Rating (at Ta=25°C unless otherwise noted)

Parameter	Symbol	CDSW19-G	CDSW20-G	CDSW21-G	Unit
Non-Repetitive peak reverse voltage	V _{RM}	120	200	250	V
Peak repetitive peak reverse voltage	V _{RRM}	100	150	200	V
Working peak reverse voltage	V _{RWM}				
DC blocking voltage	V _R				
RMS reverse voltage	V _{R(RMS)}	71	106	141	V
Forward continuous current	I _{FM}	400			mA
Average rectified output current	I _o	200			mA
Peak forward surge current	I _{FSM}				A
@1.0mS					
@1.0S					
Repetitive peak forward current	I _{FRM}	625			mA
Power dissipation	P _D	250			mW
Thermal Resistance (Junction to ambient)	R _{θJA}	500			°C/W
Storage temperature	T _{STG}	-65 ~ +150			°C

Electrical Characteristics (at Ta=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	I _F = 0.1 A I _F = 0.2 A	V _F			1.0 1.25	V
Reverse current	CDSW19-G V _R =100 V CDSW20-G V _R =150 V CDSW21-G V _R =200 V	I _R			0.1 0.1 0.1	uA
Capacitance between terminals	f = 1 MHz, V _R =0V	C _T			5	pF
Reverse recovery time	I _F = I _R =30 mA, R _L =100 Ω, I _{rr} = 0.1 X I _R	t _{RR}			50	nS

Typical Characteristics (CDSW19-G/20-G/21-G)

Fig.1 - Forward Characteristics

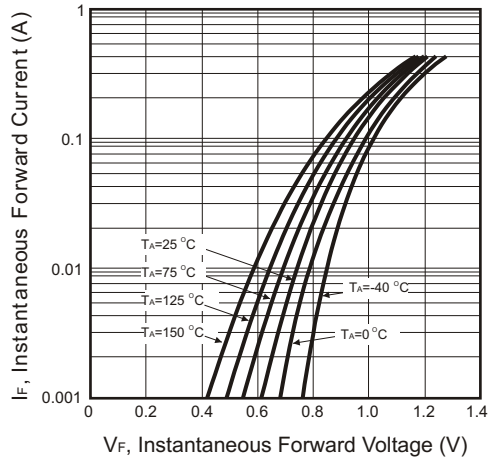


Fig.2 - Typical Reverse Characteristics

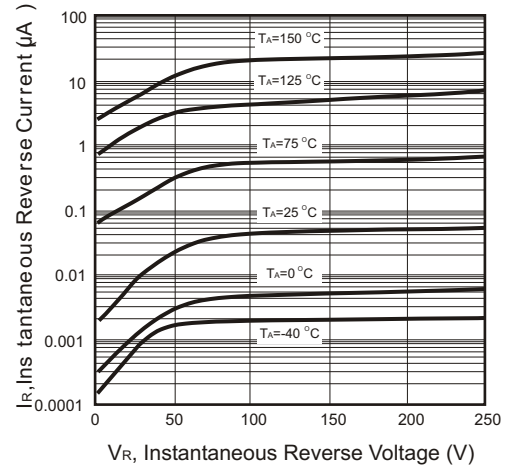


Fig.3 - Power Derating Curve



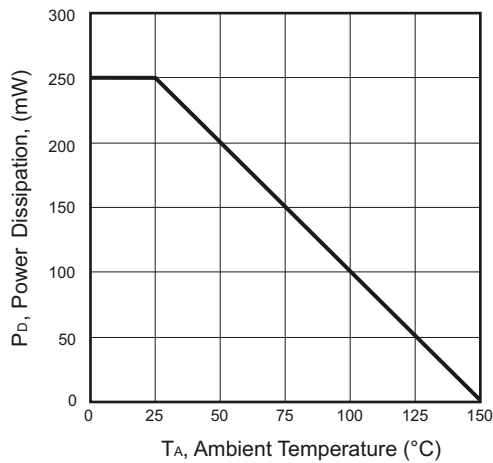


Fig.4 - Typical Capacitance V.S. Reverse Voltage

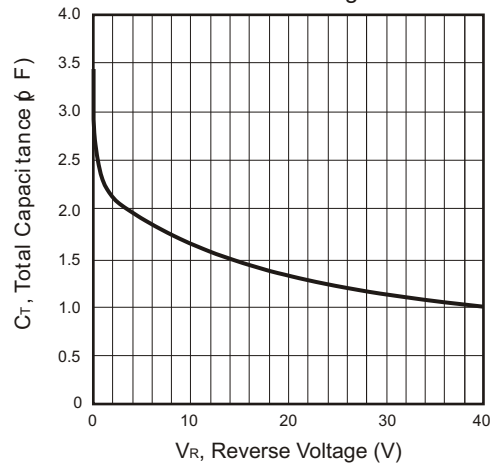

Reel Taping Specification

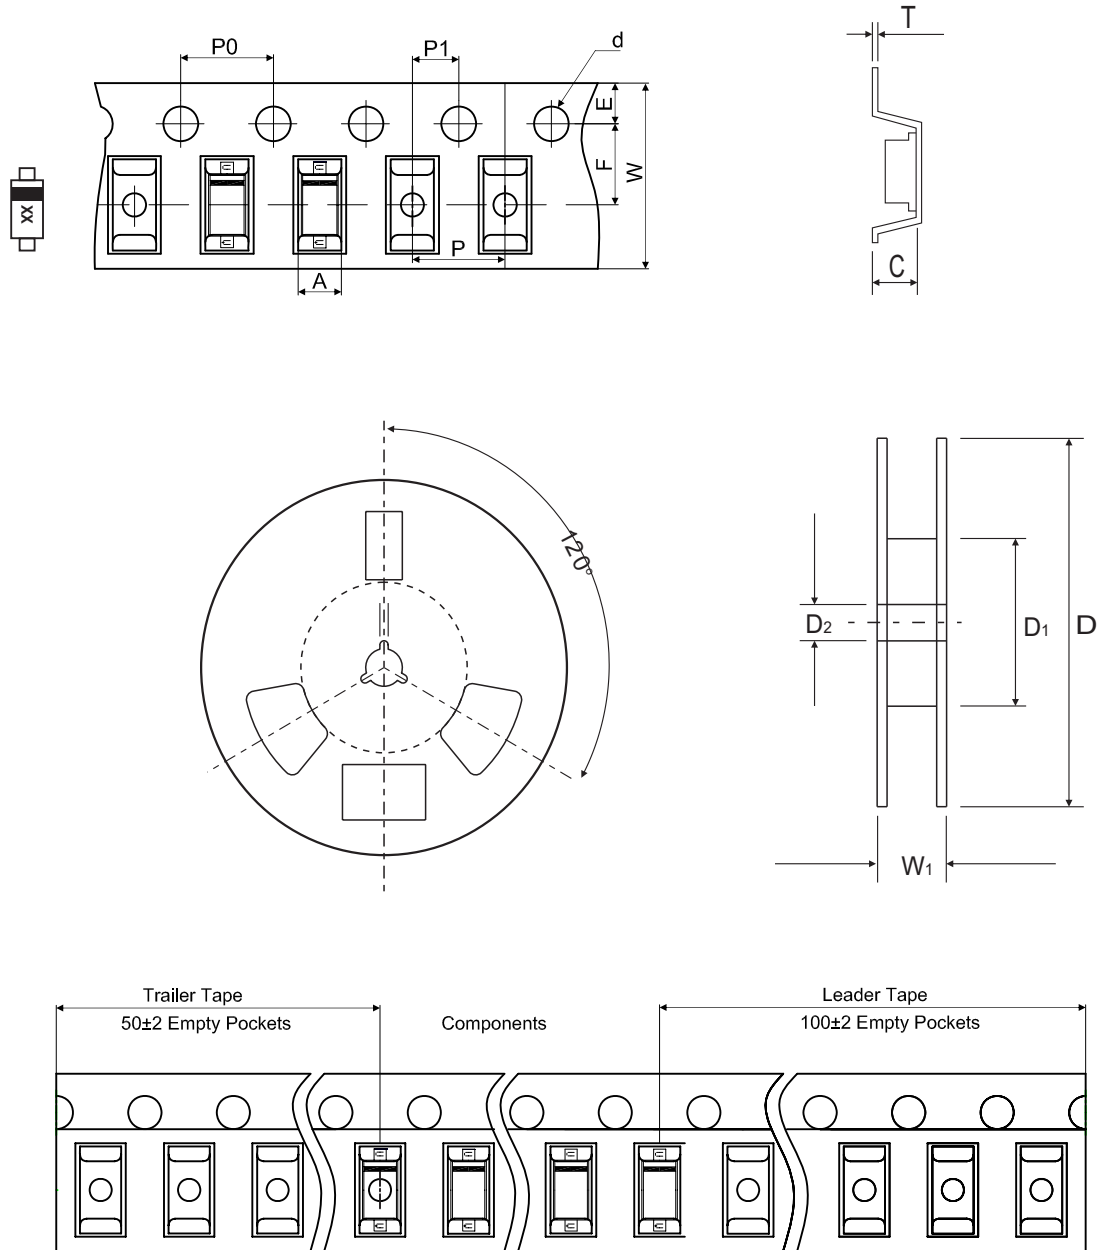

SOD-123	SYMBOL	A	B	C	d	D	D ₁	D ₂
	(mm)	1.85 ± 0.05	3.94 ± 0.05	1.57 ± 0.05	1.55 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.073 ± 0.002	0.155 ± 0.002	0.062 ± 0.002	0.061 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOD-123	SYMBOL	E	F	P	P ₀	P ₁	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 + 0.30 / - 0.10	12.30 ± 1.0
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 + 0.012 / - 0.004	0.484 ± 0.039