

Vector subrack packaging for 19" systems offers a versatile and comprehensive solution to your packaging needs. Based on DIN 41914, all parts conform to a system which allows your unique design to be constructed from a combination of standards. You may mix different module sizes and add accessories without the need for special designs. Subracks and accessories are available "off the shelf", affording you short lead times for on time completion of your project.

### COMPLETE DIN SUBRACKS FULLY ASSEMBLED OR KITS

**CCK** Card Cage (subrack) frame only kit including sidewalls, front, rear and rear-center extrusions, all nut strips, backplane insulators and assembly instructions. CG1-series VectorPak™ card guides sold separately. Guide positions are variable at 1HP (0.200") horizontal increments.

**CCA** Card cage (subrack) frame only described above, but factory assembled.

**CG1-series VectorPak™ card guides sold separately**

### DIN-Based Metric Subrack Ordering Information

**CCK - 160**

**3U**

**Rack Height**

3U = 5.25"H x 19.0"W

6U = 10.50"H x 19.0"W

9U = 15.75"H x 19.0"W

**Model Type**

**CCK-** Card cage frame kit

**CCA-** Factory Assembled

**Card Depth**

160 -160mm, 6.299"

220 -220mm, 8.66"

280- 280mm, 11.02"

340- 340mm, 13.39"

400- 400mm, 15.75"

**Standard Card Heights**

3U = 100mm (3.94")


6U = 233.35mm (9.187")

9U = 366.70mm (14.437")


NON EMC  
Subracks



VectorPak™ Kit (CCK)

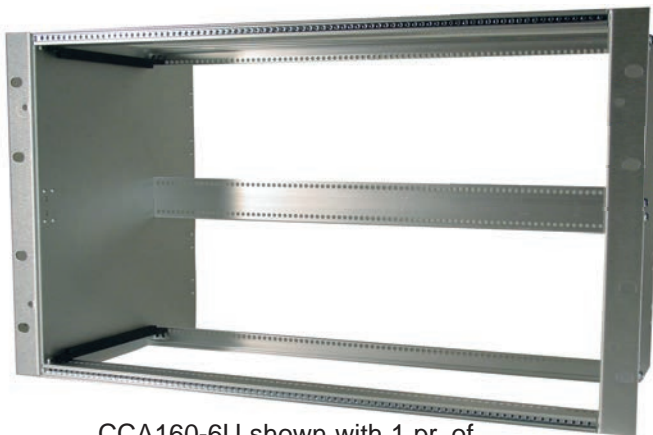

CCA160-6U shown with 1 pr. of CG1-160 card guides installed

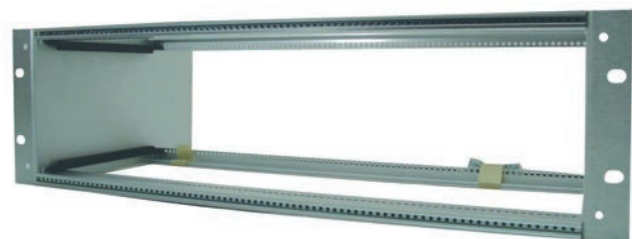


CCA160-3U shown with 1 pr. of CG1-160 card guides installed



# Non EMC DIN-Based VectorPak™ Subracks



ALL VECTORPAK™ 19" DIN SUBRACK COMPONENTS AVAILABLE SEPARATELY

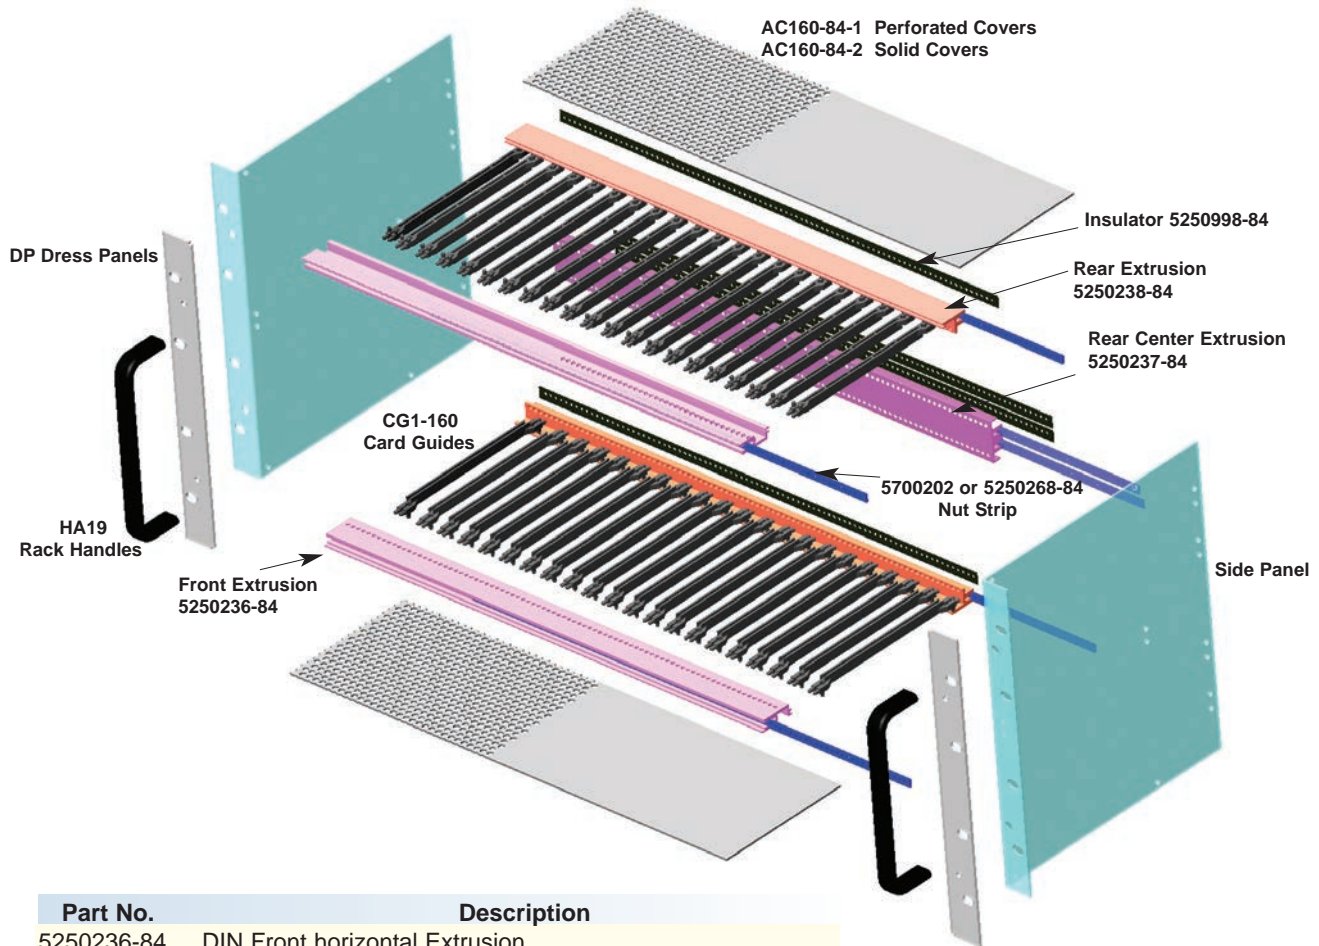


NON EMC Subracks

Part No.	Description
5250236-84	DIN Front horizontal Extrusion
5250238-84	DIN Rear horizontal Extrusion
5250237-84	DIN Center horizontal Extrusion
5250268-84 or 5700202	M2.5 Nut Strip, 17.0"
5250268-84	M2.5 Nut Strip, cut less than 17.0" in 0.20" increments 1HP)
5250998-84	Backplane Insulation Strip, 17.0"

The above items are available in 0.800" (4HP) to 17.0" (84HP) and attach to VectorPak™ sidewalls (Page 38) with 8-32 screws (HD94)


### Attractive & Rugged Outer Enclosures

Available for 3U, 6U or custom subracks  
Accepts up to 19" wide subracks with rackmount brackets.  
Many choices of paint colors - Contact factory.

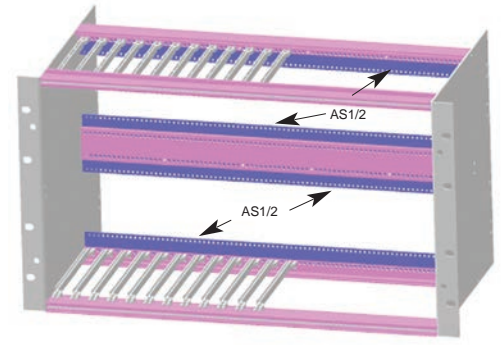

SE1588 with VectorPak™ CCA26 and CG3 card guides

www.vectorelect.com




SE1588  
4U for 8.4"W Subrack

SE1322  
3U x 22"D for 19"W Subrack

Specification subject to change without notice



SE1422 3U x 14"D for 19"W Subrack

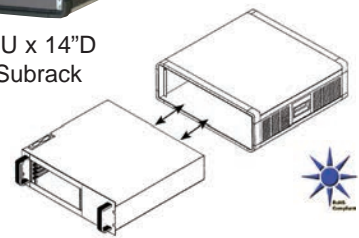

800-423-5659