
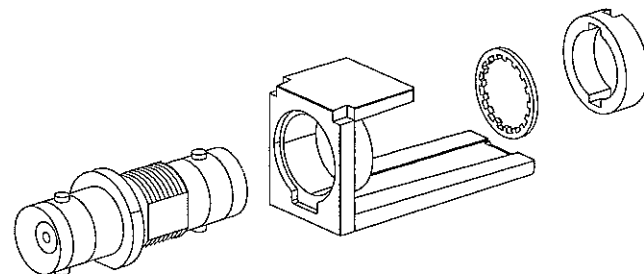


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
CMBA75**Y	3.58 LB/100 PCS (1629g/100 PCS)

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. DIMENSIONS IN PARENTHESES ARE IN METRIC.
4. FOR FREQUENCY RANGE FROM 10-250MHZ, WITH MEASUREMENTS CALCULATED AT 250MHZ, TYPICAL RESULTS ARE INDUCTANCE 9.18nH, CAPACITANCE 1.6pF.
5. ATTENUATION AND RETURN LOSS AT 22.68 Mhz, THE SIGNAL FREQUENCY FOR DS3, GIVES RESULTS OF -.1 DB AND -30 DB RESPECTIVELY.
6. PART INCLUDES:
  - i- MODULE BASE
  - i- 75ohm BNC COUPLER (ASSEMBLED TO MODULE BASE)
  - i- LOCK WASHER
  - i- ROUND SPANNER NUT

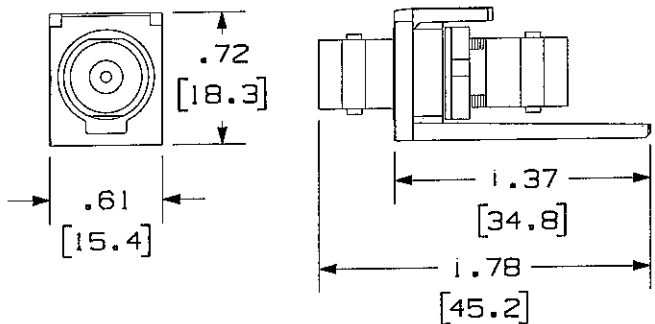

DRAWING FILENAME		MO2479GW_DC181_00A.PRT	SIZE	A
<b>MINI-COM 75 OHM BNC COUPLER</b> <b>MODULE CUSTOMER DRAWING</b>				
<b>NETWORK SYSTEMS</b> AUG 18 2006 <b>ENGINEERING DEPT</b>		<b>PANDUIT</b> ™ CORP. TINLEY PARK, ILL 60477	I.I. NUMBER N/A	
		ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± .010(.3) (.XX) ± .031(.8) ANGLES ±	PRODUCT SPEC N/A	
		THIRD ANGLE PROJECTION	WORK INSTRUCTION N/A	
		DRAWN BY JsP	SCALE NONE	
		DATE 4-26-06	PART NO. CMBA75**Y	
		MATERIAL: COUPLER BODY- NICKEL PLATED COUPLER INSULATOR- PLASTIC COUPLER CONTACT- GOLD PLATED MODULE BASE- PLASTIC	DRAWING NO. 02479-181	

R	4-26-06	JsP	<i>JS</i>	RELEASED TO PRODUCTION	02479-181	<i>JS</i>	<i>JS</i>						
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH	CHK'D			