


## DLA2-48D3



- ↳ Hybrid SAD-GDT Technology
- ↳ UL497B LISTED
- ↳ 20kA I<sub>max</sub> (1x 8/20us)
- ↳ 5kA Imp (2x 10/350us)
- ↳ 10kA I<sub>n</sub> (10x 8/20us)
- ↳ Modular
- ↳ 4W+SHIELD+G

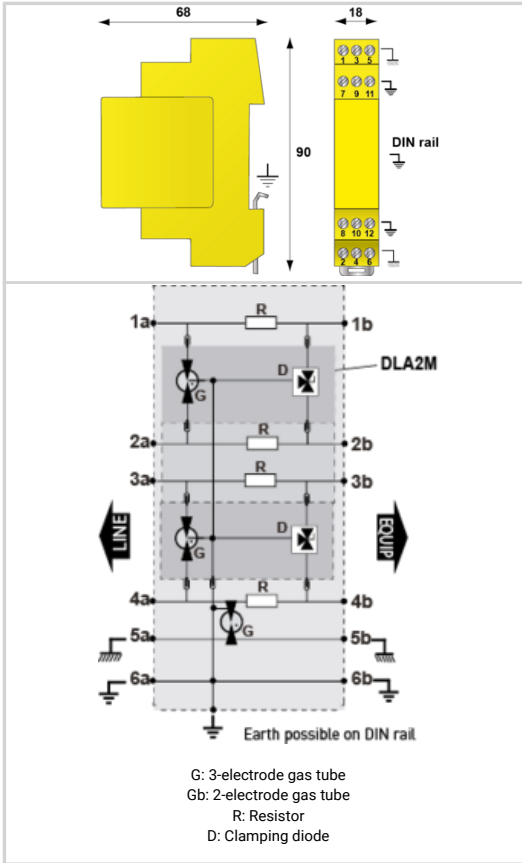

Electrical Characteristics	
Max. load current	IL 300 mA
Impulse current 2 x 10/350µs Test - D1 Category	I <sub>imp</sub> 5 kA
Nominal discharge current C2 Category	I <sub>n</sub> 2.5 kA
DATA SPD TYPE	UL497B LISTED
VOLTS	(V) 48
WIRES	4W+SHIELD+GROUND
LINE CURRENT MAX	(A) 0.3
AMBIENT MIN	(C) -50
AMBIENT MAX	(C) +85
RESIDUAL VOLTAGE	(V) 70
MCOV	(V) 60/72/72
IMAX8/20µs	(kA) 20
Iimp10/350µs	(kA) 5
DATA SPEED	(bps) up to 10MHz
FREQUENCY	(MHz) up to 10
INSERTION LOSS (@ FREQ)	(db) < 1
CAPACITANCE	(pF) < 50
Mechanical Characteristics	
Operating and storage temperature	-40/+85°C
Weight	0.089 kg
TECHNOLOGY	SAD-GDT
NETWORK CONFIGURATION	2 Channel (4W+SHIELD+G)
CONNECTION METHOD	RJ11 Connector
MOUNTING	Wall mount
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
SPARE PART	DLA2M-48D3
Standards	
Certification	UL479A
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
STANDARDS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Part number	
640312	