

# Gear Tooth Speed Sensors



## GS102301 Sensors

Threaded, straight connector gear tooth speed sensor rated to 140 °C

### Description

The GS1023 series gear tooth speed sensors are Hall Effect devices designed for use in applications where ferrous edge detection/near zero speed sensing is needed. The single Hall design is immune to alignment issues allowing unlimited mounting positions. They provide a sinking current output.

### Features

- From near zero speed up to 15 kHz sensing capability
- Resistant to fuels, solvents, and lubricants associated with engines, transmissions, brakes and chassis systems
- Supplied with installed Viton O-ring
- Installs into a standard M20 x 1.5 O-ring port
- RoHS compliant
- IP67
- Typical air gap of 1.5 mm\*

### Typical Applications

- Speedometers
- Anti-lock braking systems
- Exercise equipment
- CNC machine tools

### Environmental Specifications

|                             |  |
|-----------------------------|--|
| Vibration                   | Sinusoidal, 15 g max from 40 Hz to 2 kHz |
| Mechanical Shock Resistance | 50 g                                     |
| Maximum Speed Detection     | 15 kHz                                   |
| Operating Temperature       | -40 °C to 140 °C (-40 °F to 284 °F)      |
| Storage Temperature         | -40 °C to 150 °C (-40 °F to 302 °F)      |
| Ingress Protection          | IP67                                     |

### Electrical Specifications

|                              |                     |
|------------------------------|---------------------|
| Operating Supply Voltage     | 5 to 24 VDC         |
| Maximum Input Voltage        | 30 VDC              |
| Maximum Reverse Voltage      | 26.5 VDC            |
| Supply Current               | 3 mA typ., 6 mA max |
| Output Sink Current          | 25 mA max           |
| Recommended Pull-Up Resistor | See chart           |

### Mechanical Specifications

|   |                                |
|---|--------------------------------|
| Housing Material                            | Glass Reinforced Thermoplastic |
| Maximum Installation Torque Limit           | 68.0 Nm (50 ft lb) on threads  |
| Operating Air Gap / Sensing Distance*       | 1.5 mm (0.06")                 |
| * With recommended target type; see drawing |                                |
| Sensor Orientation                          | Not sensitive                  |

### Products

|                    |                       |
|--------------------|-----------------------|
| <b>Part Number</b> | <b>Connector**</b>    |
| GS102301           | Delphi Metri-Pack 150 |


\*\*Mates to Delphi connector 12162280

Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.


### Recommended External Pull-Up Resistor

| Volts DC | 5  | 9    | 12   | 15 | 24 |
|----------|----|------|------|----|----|
| Ohms     | 1k | 1.8k | 2.4k | 3k | 3k |


### Open Collector Sinking Block Diagram

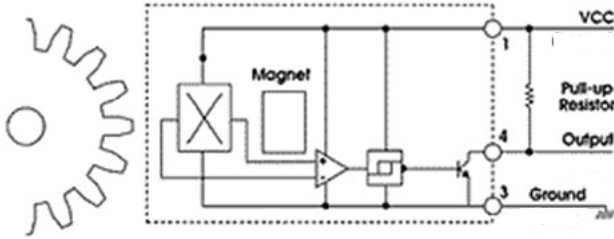

### Dimensions mm (inches)

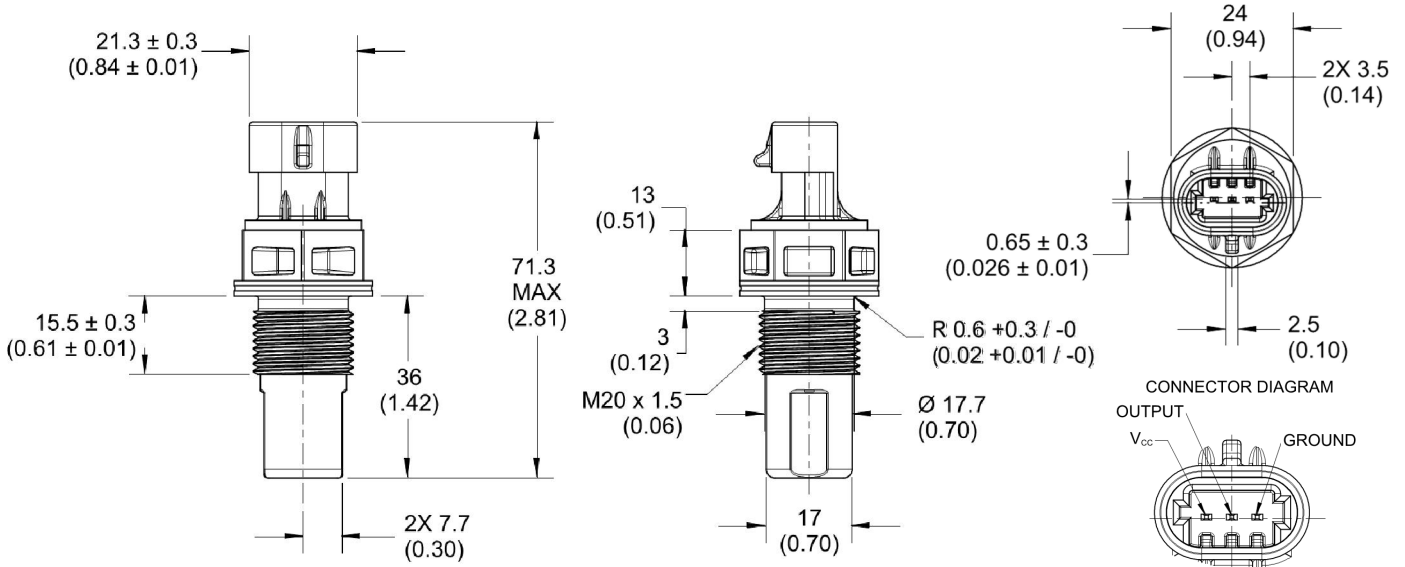

### Installation

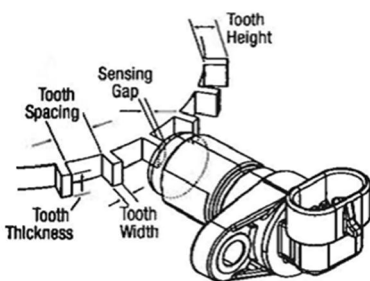

For best results, we recommend targets made from low carbon cold rolled steel. Other factors that influence sensor performance include gear tooth height and width, space between the teeth, shape of the teeth and thickness of the target. As a general guideline, consider a target with minimum parameters as shown below. Note that smaller dimensions may work, but testing for the application is required.

| Tooth Height   | Tooth Width    | Distance between Teeth | Target Thickness |
|----------------|----------------|------------------------|------------------|
| 5.0 mm (.200") | 2.5 mm (.100") | 10 mm (.400")          | 6.35 mm (.250")  |