

# ICP602823PA-01

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V  
Safety Circuit, IEC62133 certified

## Specifications

Renata Type	ICP602823
IEC Designation	ICP072926
Part Number	100697
Contact Method:	Wire AWG 30
Safety Circuit	Yes

Nominal Voltage	3.7 V
Nominal Capacity	350 mAh
Minimum Capacity	335 mAh (0.2C cut off 3.0 V at 20°C)
Internal Impedance	< 260 mΩ / 30% SOC

Thickness ( t )	Max 6.4 mm
Length ( l )	Max 25.5 mm
Width ( w )	Max 28.2 mm
Weight	~ 7.3 g

## Charging Characteristic

	CC/CV – Constant Current / Constant Voltage
Voltage	4.2 V CV
Current Normal	0.5 C CC – 175 mA
Max. Charging Current	1.0 C CC – 350 mA
Temperature at Charging	0 °C .... 45 °C


## Discharge Characteristic

Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 700 mA ( for non continues discharge ) 1.0 C – 350 mA ( for continues discharge )
Temperature during Discharge	-20 °C ... 60 °C

Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles ( 0.5 C charge, 0.5 C discharge )
--------------------------------	--

Storage Temperature	-20 °C ... 45 °C ( 0 °C ... 30 °C recommended in case of storage for more than 3 months)
---------------------	---

## Dimensions

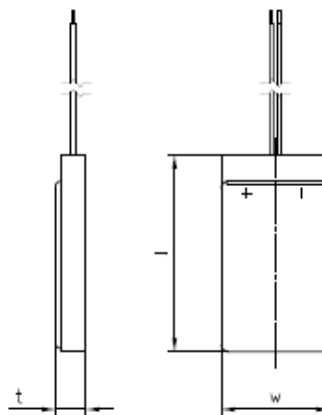

*Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage [www.renata.com/downloads/restriction\\_of\\_use](http://www.renata.com/downloads/restriction_of_use)*

Rev. ICP602823 V02 08/2019