


MMBT5551-HF (NPN)

RoHS Device

Halogen Free





Features

- Power dissipation of 300mW.
- High stability and high reliability.

Mechanical data

- Case: SOT-23, molded plastic.
- Epoxy UL: 94V-0.
- Mounting position: Any.

Circuit Diagram

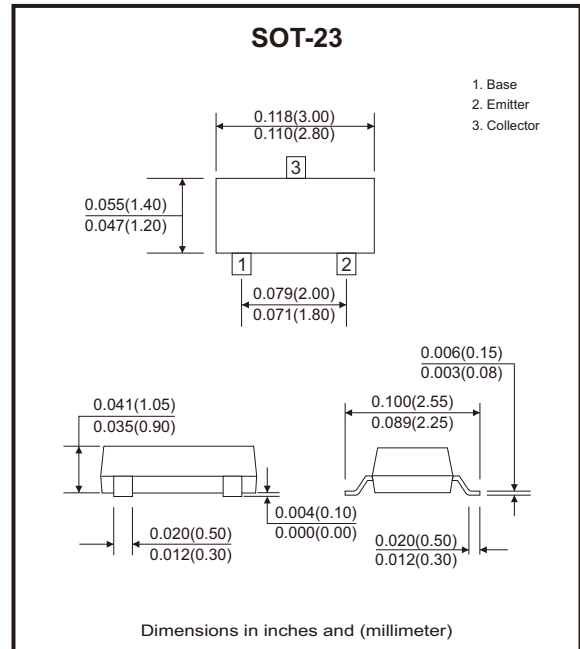

Maximum Ratings (at TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	V _{CB0}	180	V
Collector-emitter voltage	V _{CE0}	160	V
Emitter-base voltage	V _{EB0}	6	V
Collector current-continuous	I _c	600	mA
Collector power dissipation	P _c	300	mW
Junction temperature	T _J	150	°C
Storage temperature range	T _{STG}	-55 to +150	°C
Thermal resistance from junction to ambient	R _{θJA}	416	°C/W

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100\mu A, I_E = 0$	180			V
Collector-emitter breakdown voltage (Note 1)	$V_{(BR)CEO}$	$I_C = 1mA, I_B = 0$	160			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 10\mu A, I_C = 0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB} = 120V, I_E = 0$			50	nA
Emitter cut-off current	I_{EBO}	$V_{EB} = 4V, I_C = 0$			50	nA
DC current gain (Note 1)	$h_{FE(1)}$	$V_{CE} = 5V, I_C = 1mA$	80			
	$h_{FE(2)}$	$V_{CE} = 5V, I_C = 10mA$	100		300	
	$h_{FE(3)}$	$V_{CE} = 5V, I_C = 50mA$	30			
Collector-emitter saturation voltage (Note 1)	$V_{CE(sat)}$	$I_C = 10mA, I_B = 1mA$			0.15	V
		$I_C = 50mA, I_B = 5mA$			0.20	V
Base-emitter saturation voltage (Note 1)	$V_{BE(sat)}$	$I_C = 10mA, I_B = 1mA$			1.00	V
		$I_C = 50mA, I_B = 5mA$			1.00	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 10mA, f = 100MHz$	100		300	MHz
Collector output capacitance	C_{ob}	$V_{CB} = 10V, I_E = 0, f = 1MHz$			6	pF

Notes: 1. Pulse test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.

Classification of $h_{FE(2)}$

h_{FE}	100-300	
Rank	L	H
Range	100-200	200-300

Rating and Characteristic Curves (MMBT5551-HF)

Fig.1 - Static Characteristic


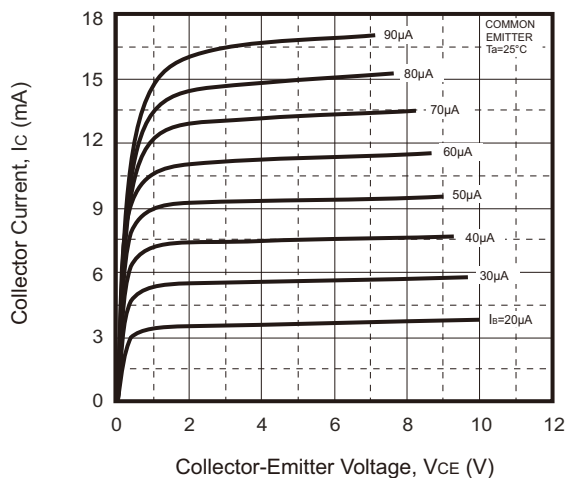


Fig.2 - $h_{FE} - I_C$

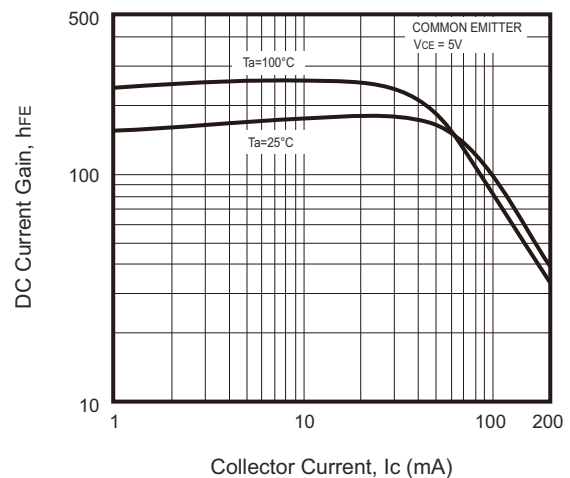

Rating and Characteristic Curves (MMBT5551-HF)

Fig.3 - V_{BEsat} — I_c

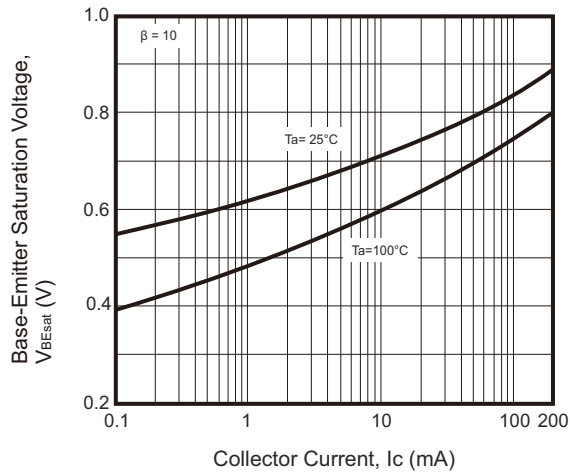


Fig.4 - V_{CEsat} — I_c

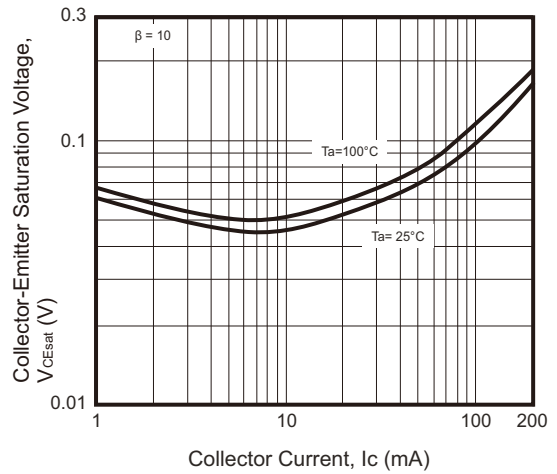


Fig.5 - V_{BE} — I_c

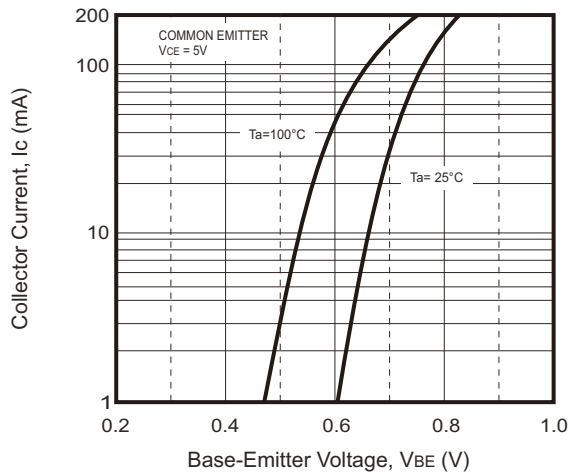


Fig.6 - C_{ob}/C_{ib} — V_{CB}/V_{EB}

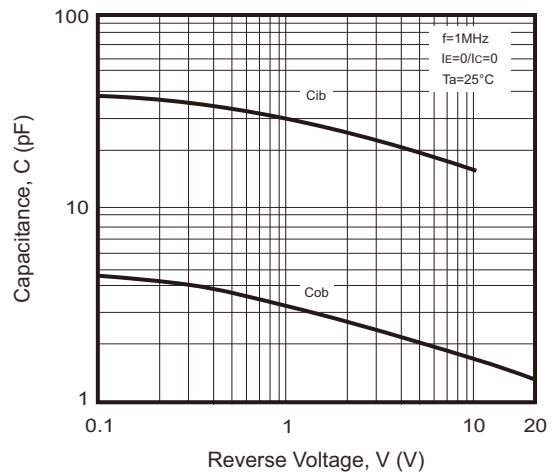


Fig.7 - f_T — I_c






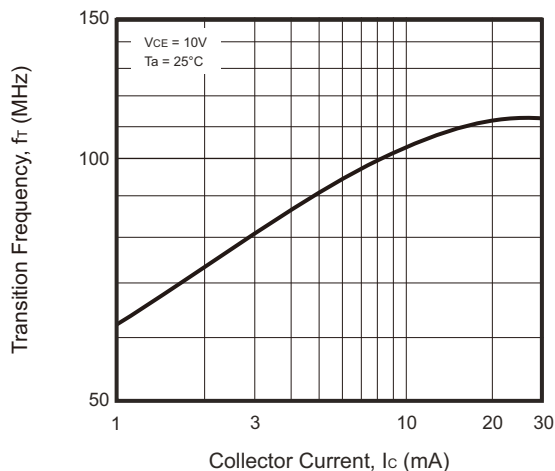


Fig.8 - P_c — T_a

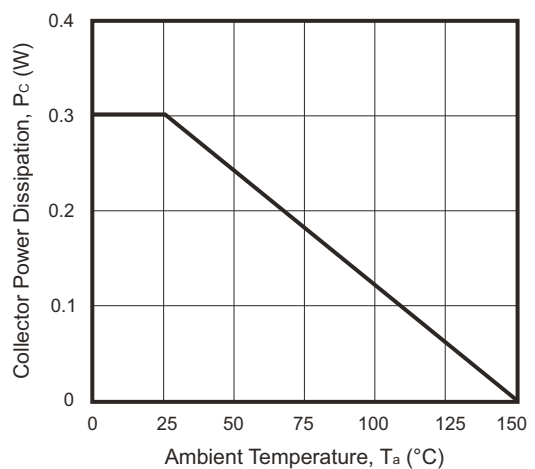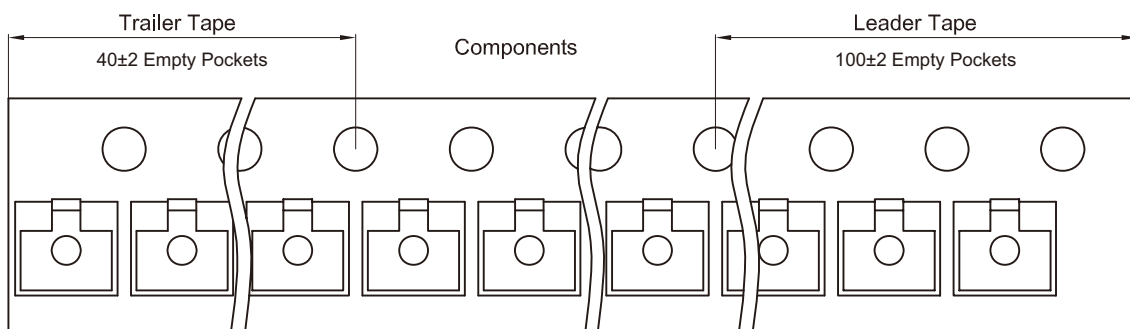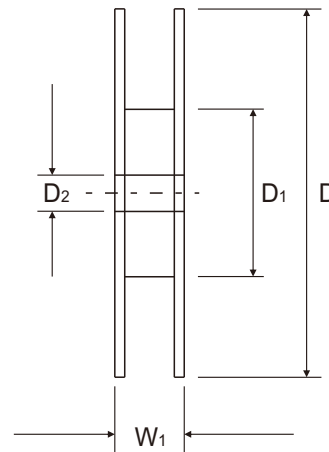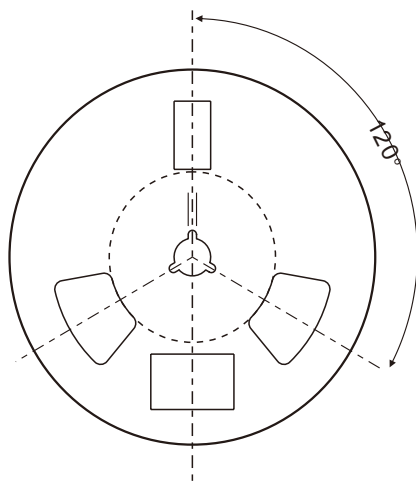

Reel Taping Specification

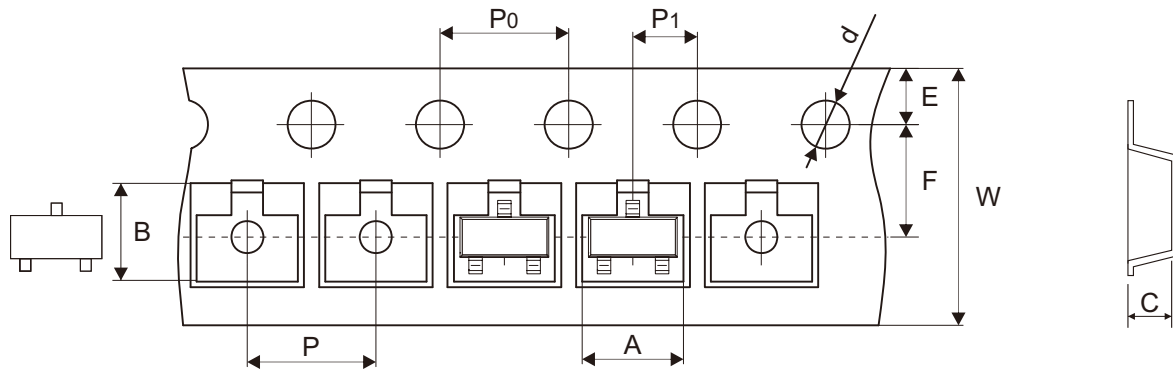

SOT-23	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.15 ± 0.10	2.77 ± 0.10	1.22 ± 0.10	1.50 ± 0.10	178.00 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.124 ± 0.004	0.109 ± 0.004	0.048 ± 0.004	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-23	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	8.00 ± 0.10	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.315 ± 0.004	0.484 ± 0.039

Company reserves the right to improve product design , functions and reliability without notice.

REV:A