



No.390, Yong He Road,  
Shanghai 200072, China

### TECHNICAL DATA SHEET CABLE ASSEMBLY

PART NUMBER :R284C0351003

Issue : NA

Date : NA


Customer : **Radio Spares**

Specification : **NA**

Issue : **NA**

Date : **N/A**

All dimensions are in mm

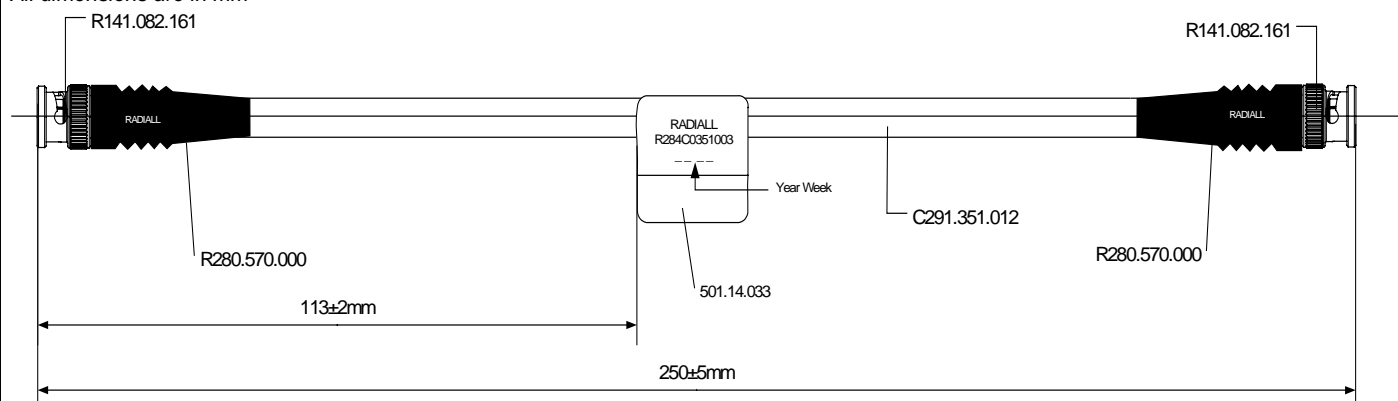

Connectors designation :

**Connector 1 : BNC Straight Plug Crimp Type  
Cable 5/50 S (R141.082.161)**

**Connector 2 : BNC Straight Plug Crimp Type  
Cable 5/50 S (R141.082.161)**

Cable designation :

**Flexible Cable 5/50S (RG58)**

**C291.305.000**

Nominal length :

**Lg: 250 mm**

Cable colour :

**Black**

Outer diameter :

**4.95 mm**

Accessories :

**Plastic Boots (R280.570.000)**

#### ELECTRICAL CHARACTERISTICS :

##### High Frequency

Characteristic impedance : **50±2 Ohms**

Frequency range : **DC-1GHz**

Insertion Loss : **0.32 dB max @ 1GHz & 20° C**

VSWR. : **TBT**

##### Low Frequency

Insulation Resistance : **5000 MOhms min**

Voltage Rating : **500 Veff max**

#### MECHANICAL CHARACTERISTICS :

Recommend min. bend radius : **15 mm**

Cable crush resistance : **NA**

Life ( connectors ) : **100 cycles**

#### ENVIRONMENTAL CHARACTERISTICS :

Operating temperature range : **-35° C to +70° C**

Remark : **NA**

Attachment : **R141.082.161-TDS ,**

**C291.305.000 (RG58)-TDS**

**Cable Assembly is RoHS compliant.**

#### CUSTOMER'S APPROVAL

**Service or  
Company's stamp**

**Name**

**Date**

Willy	A	2007-5-16	Creation	Garet Xie
-------	---	-----------	----------	-----------

Name	Issue	Date	Modification	Checked by
------	-------	------	--------------	------------