







PAGE 1/3 ISSUE 30-10-18B SERIES PART NUMBER R380300037

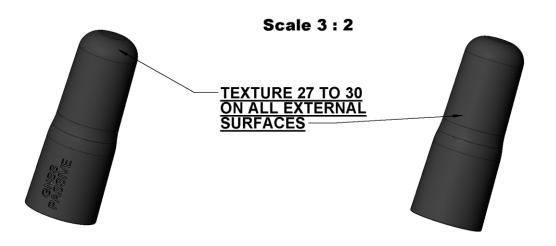

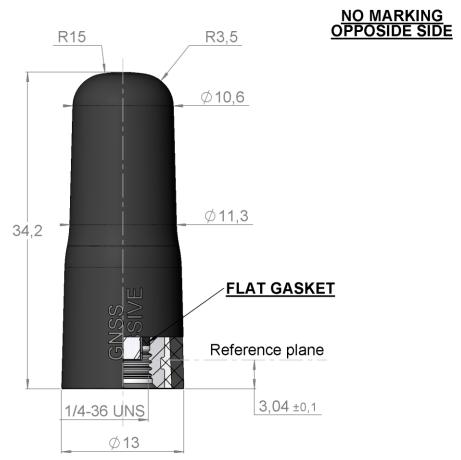

Scale 2,5:1

All dimensions are in mm. Tolerances according ISO 2768 m-H



## **Technical Data Sheet**

GNSS PASSIVE ANTENNA LINEAR POLARIZATION - SMA MOUNT

**SERIES** PAGE **2/3** ISSUE 30-10-18B PART NUMBER R380300037 **ANTENNA** 

## **ELECTRICAL CHARACTERISTICS**

GALILEO E1 - GPS L1 (1559-1591) MHz Frequency Range:

**GLONASS (1597-1607)** MHz

Nominal Impedance: 50 Ω VSWR: 2.5:1 Тур.

Typical Gain: -3 dBic

Radiation pattern: Dipolar

Polarization: Linear vertical

Male SMA Connector type:

**MECHANICAL CHARACTERISTICS** 

Antenna color: **BLACK** 

Radome material: **Polyamide** 

Radome texture: Charmille 27-30

Overall length: 34.2 mm

Weight 5,65 g **ENVIRONMENTAL CHARACTERISTICS** 

° C Operating -40/+71 MIL-STD-810G, Methods temperature:

501.5 & 502.5, Proc. II -40/+85 ° C Storage

MIL-STD-810G, Methods temperature:

501.5 & 502.5, Proc. I Humidity

Relative Through Op. Temp range MIL-STD-810G, Meth 507.5 Humidity (Non-condensing):

Proc. II

Immersion (mated)

Hours

Solar Radiation MIL-STD-810G, Meth 505.5, 1120 W/m<sup>2</sup> Procedures II

MIL-STD-810G, Meth 509.5 Salt Fog

4 x 24 h