

Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	1 of 9		Publish Date	Jan. 31, 2019	

● FUNCTIONS

1. Tilt Angles: 45° within a 360° radius
2. Suitable for vertical PCB
3. Vibration Detecting



● APPLICATIONS

1. Rotation detection for LCD monitor
2. Automatically shut off for home appliances
3. Automatically shut off for Sporting equipment
4. Automatically shut off for motorbike
5. Alarm system
6. Anti-theft / Anti-tamper devices
7. Being motion detection (personal locator)
8. Wake up systems for power saving, such like remote controllers
9. Earthquake Detecting



Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	2 of 9		Publish Date	Jan. 31, 2019	

● FEATURES

1. Housing made of high insulation plastic material, free from electric conduction and rust problem.
2. Detecting with photo transistors, generating highly reliable and stable signals.
3. All plastic materials subject to industrial purpose, resist high temperature and meet fireproof function.
4. Simple ON and OFF signals, easy for design.
5. RoHS compliance, an ideal substitute for mercury switch.
6. A more economical tilt and vibration detection option than IC design solution.
7. All made in Taiwan and examined before shipment.

● PATENTS

1. Taiwan Patent No. M 450817
2. Taiwan Patent No. M 529259
3. Taiwan Patent No. I 553684
4. Taiwan Patent No. I 359430
5. Taiwan Patent No. I 584326
6. Taiwan Patent No. I 451463
7. Europe Patent No. EP 2157591
8. U.S.A Patent No.US 9,863,802 B2
9. China Patent No. ZL 200820126206.9
10. China Patent No. ZL 201620373881.6
11. China Patent No. ZL 201220539712.7
12. Japan Patent No. 3148127




Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	3 of 9		Publish Date	Jan. 31, 2019	

● DIMENSIONS / OPERATION / P.C.B. LAYOUT (Unit: mm, Tolerance: ±0.25mm)

Fig. 1

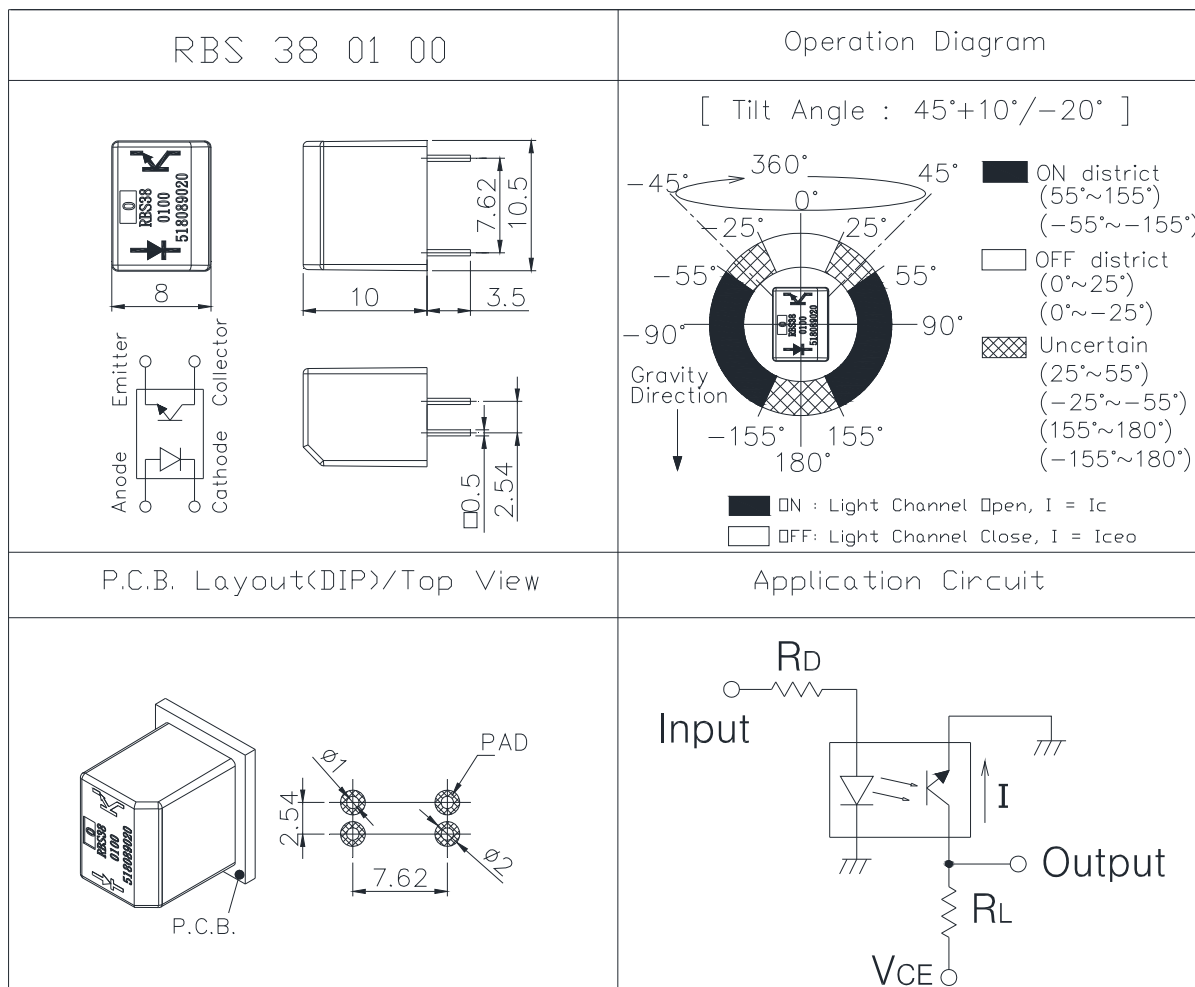

Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	4 of 9		Publish Date	Jan. 31, 2019	

● Current/Voltage Suggested

Input Current (mA)	Operating Voltage (V)	Conditions
10	3.3	V _{CE} =3.3V R _D =200 ohm R _L =75K ohm
10	5	V _{CE} =5V R _D =390 ohm R _L =100K ohm

* Please refer to above Application Circuit for designing electrical circuit.

● Absolute Maximum Rating (Ta=25°C)

Item		Symbol	Rating	Unit
Input	Power Dissipation	P _d	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	100	mW
	Collector Current	I _C	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		T _{opr}	-25~+85	°C
Storage Temperature		T _{stg}	-40~+85	°C
Soldering Temperature (*1)		T _{sol}	260	°C

(*1) t=5 Sec



Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	5 of 9		Publish Date	Jan. 31, 2019	

● Electrical Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F=20mA$	-	1.2	1.5	V
Reverse Current	I_R	$V_R=5V$	-	-	10	μA
Peak Wavelength	λ_p	$I_F=10mA$		940		nm
Dark Current	I_{ceo}	$V_{CE}=10V$	-	-	2	μA
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=0.25mA$ $I_F=20mA$	-	-	0.4	V
Light Current	I_C	$V_{CE}=5V$ $I_F=20mA$	0.5	5	-	mA
Rise Time	T_r	$I_C=0.8mA$ $V_{CC}=30V$	-	5	-	μsec
Fall Time	T_f	$R_L=1K\Omega$	-	5	-	μsec
Operation Diagram	θ	Fig.1	25	45	55	$^{\circ}$



Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	6 of 9		Publish Date	Jan. 31, 2019	

● Typical Electrical / Optical Characteristics Curves (Ta=25°C)

Fig.1 Power Dissipation vs. Ambient Temperature

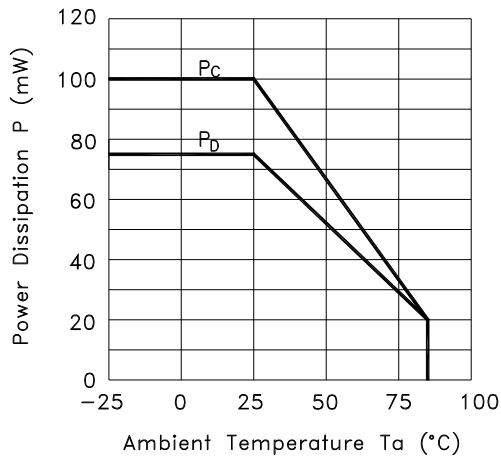


Fig.2 Forward Current vs. Forward Voltage

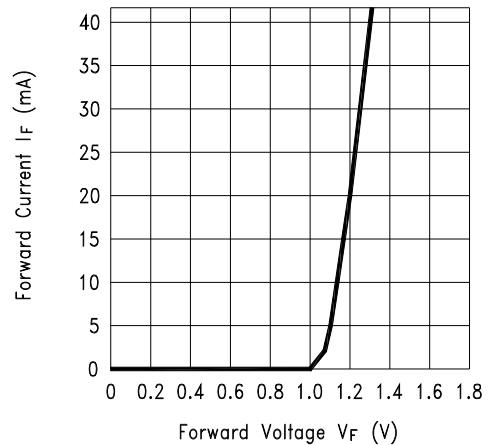


Fig.3 Collector Current vs. Collector-emitter Voltage


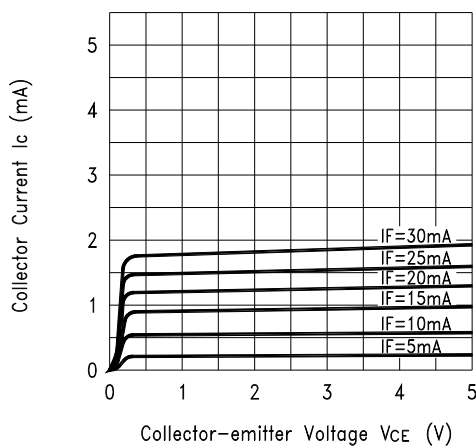



Fig.4 Collector Current vs. Ambient Temperature

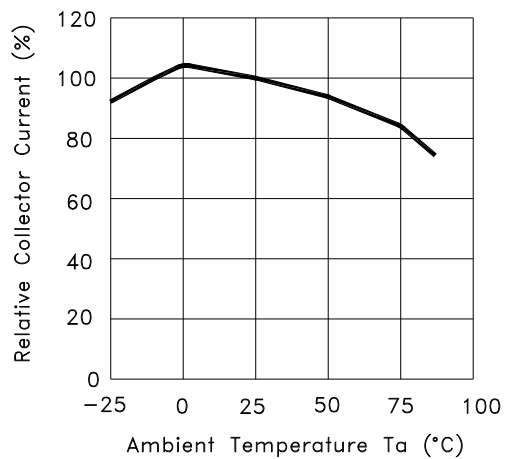

Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	7 of 9		Publish Date	Jan. 31, 2019	

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

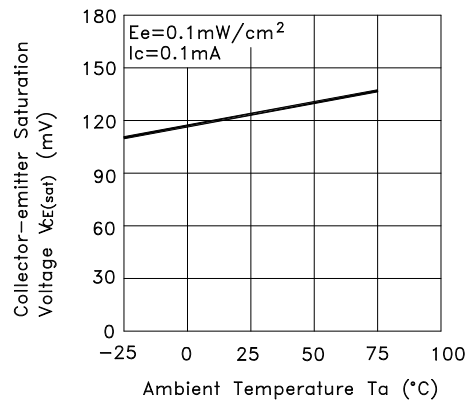

● RELIABLE TEST ITEMS

Reliable Test for RBS380100

	Test Item	Test Content
1	Operation Temperature	-25°C ~ 85°C
2	Storage Temperature	-40°C ~ 85°C
3	Humidity	40 °C / 95 %RH
4	Mechanical Life	2Hz, horizontal 1,000,000 times
5	Electrical Life	$I_F=20\text{ mA}$, $V_{CE}=5\text{ V}$ TIME: 30,000 hrs



Tilt Sensor Switch

Item No.	RBS380100	Description	Photoelectric	Version	1
Page	8 of 9		Publish Date	Jan. 31, 2019	

● SOLDERING CONDITION

Following soldering conditions are for reference only, please use soldering information that solder paste manufacturer recommends.

Condition	Soldering Temperature	Soldering Time	Wattage of Manual Soldering	Type
Suitable Production Process				
Wave Soldering	260±5°C	< 5 seconds max.	-	DIP
Manual Soldering	300±5°C	< 3 seconds max.	30W or Temperature-controlled manual soldering	DIP

● PACKAGE

	Part Number	Package	Quantity	Total	Dimension(mm)
1.	RBS380100	IC tube	48 pcs	48 pcs	525L*10W*17.5H
		Inner box	84 tubes	4,032 pcs	539L*130W*130H
		Outer carton	4 boxes	16,128 pcs	551L*285W*288H

※ Package shown as below for reference.

