RUZC2M

Zelio, plugin relay socket, mixed contact, 10 A, 250 V, octal connector, for RUMC2 relays





Main

Range of Product	Harmony Electromechanical Relays Harmony Timer Relays
Product or Component Type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RUM 2 C/O Plug-in relay RE48 2 C/O Plug-in relay RE48 1 C/O + 1 C/O
Shape of pin	Cylindrical
Device short name	RUZ
Sale per indivisible quantity	10

Complementary

[lth] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Tightening torque	< 1 N.m M3.5
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.50 in (38 mm)
Net Weight	0.12 lb(US) (0.054 kg)
[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3

Environment

LITTION	
Connections - terminals	Connector, 1 x 0.251 x 2.5 mm² AWG 22AWG 14) flexible with cable end Connector, 2 x 0.252 x 1 mm² AWG 22AWG 17) flexible with cable end Connector, 1 x 0.51 x 2.5 mm² AWG 20AWG 14) solid without cable end Connector, 2 x 0.52 x 1.5 mm² AWG 20AWG 16) solid without cable end
Standards	IEC 61984
Product Certifications	UL CSA
Ambient Air Temperature for Storage	-40185 °F (-4085 °C)
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Ordering and shipping details

_

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.33 in (0.84 cm)
Package 1 Width	0.34 in (0.86 cm)
Package 1 Length	0.57 in (1.46 cm)
Package 1 Weight	0.01 lb(US) (0.005 kg)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	3.31 in (8.4 cm)
Package 2 Width	3.39 in (8.6 cm)
Package 2 Length	5.75 in (14.6 cm)
Package 2 Weight	22.19 oz (629.0 g)
Unit Type of Package 3	CAR
Number of Units in Package 3	200
Package 3 Height	11.22 in (28.5 cm)
Package 3 Width	11.77 in (29.9 cm)
Package 3 Length	15.67 in (39.8 cm)
Package 3 Weight	27.73 lb(US) (12.58 kg)
· ·	

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) [™] EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

on a solution of the solution		
Warranty	18 months	

RUZC2M

Dimensions

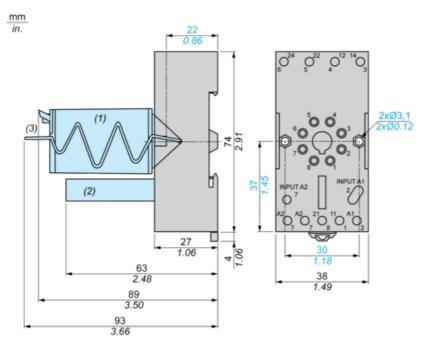

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp