


D3641-S μ ATX

Industrial Series

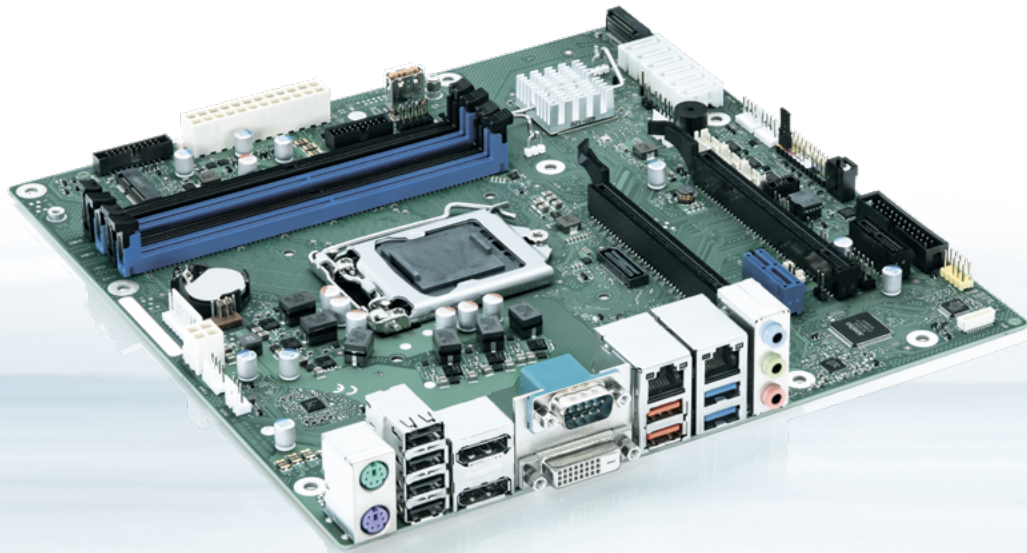

Intel® C246 Express Chipset and Intel® Xeon®/Intel® 8th/9th Gen Core™ i3/i5/i7/i9 Processors

- ▶ cTDP – Easy & flexible reduction of CPU TDP
- ▶ Supporting Intel® AMT 12.0/vPro
- ▶ Dual LAN, 4x COM, GPIO
- ▶ M.2 SSD & M.2 WLAN slots onboard
- ▶ Powerful USB 3.1 Gen2

POSSIBILITIES START HERE

D3641-S μATX

Industrial Series


The Industrial Motherboard D3641-S μATX is equipped with the highly performant Intel® C246 Express Chipset. It also offers a multitude of supporting processors such as the Intel® Xeon® E-21xx/E-22xx processor series, as well as Intel® Core™ i9/i7/i5/i3 (8th/9th Gen) and the Intel® Pentium®/Intel® Celeron® processor

series. Designed and approved for 24/7 continuous operation and an enhanced temperature range up to 60 °C the D3641-S μATX provides high functionality and fits perfect with special requirements of certain markets. It offers extended manageability with the latest Intel® AMT 12.0 and vPro.

▶ PRODUCT HIGHLIGHTS

- ▶ Intel® 8th/9th Gen Core™ & Intel® Xeon® Processor Series
- ▶ DDR4 2666 SDRAM, max. 64 GByte
- ▶ cTDP – Easy & flexible reduction of CPU TDP
- ▶ Supporting Intel® AMT 12.0/vPro
- ▶ PCI Express® x16 (Gen.3)
- ▶ 2x Intel® GbE LAN (incl. Teaming)
- ▶ Intel® UHD Graphics (DX12); 1x DVI-D, 2x DP V1.2
- ▶ Intel® High Definition 5.1 Audio; Infineon TPM V2.0
- ▶ 8 Bit GPIO; 4 x COM ports
- ▶ 6x USB 2.0, 4x USB 3.1 Gen1, 2x USB 3.1 Gen2, 1x USB 3.1 Gen2 stick socket
- ▶ 6x SATA 6G incl. RAID support, parallel port (internal pin header)

- ▶ M.2 2280 (PCIe-based SSD modules)
- ▶ M.2 2230 (WLAN/Bluetooth modules)
- ▶ BIOS-POST/-Boot & OS – HW Watchdog onboard

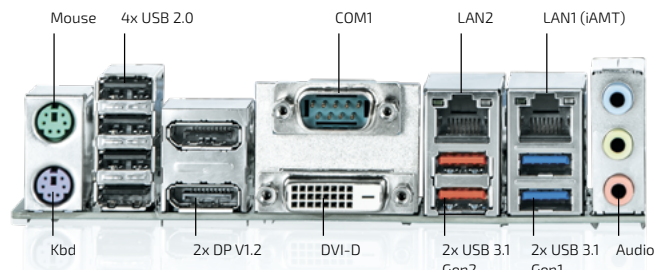

▶ TECHNICAL INFORMATION

SYSTEM	PROCESSOR	Intel® Xeon® E-21xx/E-22xx processor series Intel® Core™ i9/i7/i5/i3 (8th/9th Gen) processor series Intel® Pentium®/Intel® Celeron® processor series Socket LGA1151, max. 95 W TDP (For details on supported processors please refer to Kontron FTP Server)
	CHIPSET	Intel® C246 Express Chipset
	MEMORY	4 DIMM Sockets DDR4-2666 (1.2 V), max. 64 GByte, Dual Channel DDR4 -2666 (CL19)/-2400 (CL17)/-2133 (CL15) SDRAM, unbuffered, ECC/non-ECC Note: 128 GByte memory configuration (4x 32 GByte modules) not supported Effective memory speed depends on installed processor
VIDEO	GRAPHICS	Intel® UHD Graphics (depends on installed processor), DX12 2x DP V1.2 1x DVI-D VGA output possible via optional VGA extension card D3653-A
AUDIO	AUDIO CODEC	Realtek ALC671
	AUDIO INTERFACE	5.1- channel, High Definition Audio Codec
NETWORK CONNECTION	ETHERNET	Intel i219LM & i210AT with 10/100/1000 MBit/s, AMT 12.0/vPro Support, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
PERIPHERAL CONNECTION	USB	6x USB 2.0, 4x USB 3.1 Gen1, 2x USB 3.1 Gen2, 1x USB 3.1 Gen2 stick socket
	SERIAL PORT	1x RS232 (by header)
	OTHER I/Os	1x 8-Bit GPIO
STORAGE & EXPANSION	SATA	6x Serial ATA III 600 Interface (up to 6GBit/s), NCQ, AHCI, RAID 0/1/5/10, 1x M.2 PCIe (2280), 1x M.2 Key-E (2230)
	PCIe/PCI SLOTS	PCIe x16: 1x 16 lanes, Gen3/1x 4 lanes, Gen3 PCIe x1: 1x Gen3, "open"/1x Gen3, "closed"
POWER	CONNECTOR	8 Bit GPIO (Input/Output); WLAN LED support; WLAN enable/disable support
	INPUT VOLTAGE	3.3 V/5 V/12 V supply voltage output; SMBus controller PCA9554A
FIRMWARE	BIOS	AMI Aptio 5.x (UEFI) BIOS modified and adapted by Kontron; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCIe Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5. HW Watchdog support & BIOS integrated HW Diagnostic Tool. No legacy OS support, no MBR installation (UEFI only) Recovery BIOS, System and BIOS Password, Boot Sequence Control Integrated
	WATCHDOG	TPM V2.0 (Infineon SLB9670; TCG compliant)
	REAL TIME CLOCK	
	TPM	

TECHNICAL INFORMATION

SYSTEM CONTROL	FP HEADER	1x Header for Reset button, HDD LED & External Speaker, Power button, Power LED Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial/USB- Port Access Protection, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), Infineon Trusted Platform Module (TPM)
	SECURITY	
SOFTWARE	OS SUPPORT	MS Windows 10 Linux-64
MECHANICAL	DIMENSIONS (L x W)	µATX: 9.6" x 9.6" (243.8 x 243.8 mm)
ENVIRONMENTAL	OPERATION TEMPERATURE	0 °C - 60 °C
CERTIFICATION	EMC & SAFETY	cTÜVus acc. IEC62368-1, CE Class B Industrial Immunity, FCC-B verified

POWER SUPPLY REQUIREMENTS

SOURCE	VOLTAGE	MIN. PS LOAD	MAX. VOLTAGE TOLERANCE	MOTHERBOARD CAPACITIVE LOAD	MOTHERBOARD MAX. CURRENT (continuous)
Main Power Supply	+ 12 V	0.05 A	± 5 %	5.000 µF	10 A / 18 A*
	- 12 V	0 A	± 10 %	470 µF	0.3 A
	+ 5 V	0.2 A	± 5 %	3.000 µF	6.0 A
	+ 3.3 V	0 A	± 5 %	3.000 µF	0.5 A
Aux	+ 5 Vaux	0 A	+ 5 % / - 3 %	3.000 µF	2.5 A

*) Processor 95 W TDP: Max. Cont. Current = 10 A; max. Surge Current = 16 A (< 100sec) / 18 A (< 10ms)
 Processor 65 W TDP: Max. Cont. Current = 7 A; max. Surge Current = 14 A (< 100sec) / 18 A (< 10ms)
 Processor 35 W TDP: Max. Cont. Current = 4 A; max. Surge Current = 10 A (< 100sec) / 14 A (< 10ms)

CONNECTOR / SOCKET DIAGRAM

