

SM30 Series 30 mm Barrel Sensors



Datasheet

Opposed-Mode Infrared Photoelectric Sensors for Especially Demanding Applications



- Stainless steel or plastic barrel models
- Very high excess gain; 150 m (500 ft) sensing range; 880 nm Infrared LED
- Positive sealing eliminates even capillary leakage; lens is quad-ring sealed; exceeds NEMA 6P (IP67) ratings – ideal for equipment wash-down environments
- EZ-BEAM® technology provides reliable sensing without the need for adjustment
- Modulation frequency “A” is standard; frequencies “B” and “C” also available for preventing crosstalk in multiple-sensor applications (emitter and opposed receiver frequencies must match)
- AC- and DC-operated receiver models available; emitters feature Universal voltage
- Range for all models: 150 m (500 ft)



WARNING: Not To Be Used for Personnel Protection

Never use this device as a sensing device for personnel **protection**. Doing so could lead to serious injury or death. This device does not include the self-checking redundant circuitry necessary to allow its use in personnel safety applications. A sensor failure or malfunction can cause either an energized or de-energized sensor output condition.

Models

| Modulation Frequency ¹ | | | Housing | Cable ² | Power Supply | Output Type |
|-----------------------------------|----------------|----------------|-----------------|----------------------------------|--|------------------------|
| A | B | C | | | | |
| Emitter Models | | | | | | |
| SMA30PEL | SMA30PELB | SMA30PELC | Plastic | 2 m (6.5 ft) 2-wire Cable | Universal: 12 to 240 V ac, 10 to 30 V dc | - |
| SMA30PELQD | SMA30PELQDB | SMA30PELQDC | | 3-pin Mini-style QD ³ | | |
| SMA30SEL | SMA30SELB | SMA30SELC | Stainless Steel | 2 m (6.5 ft) 3-wire Cable | | |
| SMA30SELQD | SMA30SELQDB | SMA30SELQDC | | 3-pin Mini-style QD ³ | | |
| DC Receivers | | | | | | |
| SM30PRL | SM30PRLB | SM30PRLC | Plastic | 2 m (6.5 ft) 4-wire Cable | 10 to 30 V dc | Bi-Modal™ NPN or PNP |
| SM30PRLQD | SM30PRLQDB | SM30PRLQDC | | 4-pin Mini-style QD | | |
| SM30SRL | SM30SRLB | SM30SRLC | Stainless Steel | 2 m (6.5 ft) 4-wire Cable | | |
| SM30SRLQD | SM30SRLQDB | SM30SRLQDC | | 4-pin Mini-style QD | | |
| AC Receivers | | | | | | |
| SM2A30PRL | SM2A30PRLB | SM2A30PRLC | Plastic | 2 m (6.5 ft) 2-wire Cable | 24 to 240 V ac | SPST Solid-state, L.O. |
| SM2A30PRLQD | SM2A30PRLQDB | SM2A30PRLQDC | | 3-pin Mini-style QD ³ | | |
| SM2A30SRL | SM2A30SRLB | SM2A30SRLC | Stainless Steel | 2 m (6.5 ft) 3-wire Cable | | |
| SM2A30SRLQD | SM2A30SRLQDB | SM2A30SRLQDC | | 3-pin Mini-style QD ³ | | |
| SM2A30PRLNC | SM2A30PRLNCB | SM2A30PRLNCC | Plastic | 2 m (6.5 ft) 2-wire Cable | | SPST Solid-state, D.O. |
| SM2A30PRLNCQD | SM2A30PRLNCQDB | SM2A30PRLNCQDC | | 3-pin Mini-style QD ³ | | |
| SM2A30SRLNC | SM2A30SRLNCB | SM2A30SRLNCC | Stainless Steel | 2 m (6.5 ft) 3-wire Cable | | |
| SM2A30SRLNCQD | SM2A30SRLNCQDB | SM2A30SRLNCQDC | | 3-pin Mini-style QD ³ | | |

¹ Any emitter and receiver shown here can be used together, if they have the same modulation frequency.

² Standard 2 m (6.5 ft) cable and integral QD models are listed. Models with a quick disconnect require a mating cordset. To order the 9 m (30 ft) PVC cable model, add the suffix "W/30" to the cabled model number. For example, SM30PRLBW/30.

³ AC models with QD require SM30CC model cables.



Wiring Diagrams


Key

- 1 = Brown (red/black for QD emitters/receivers)
- 3 = Blue (red/white for QD emitters/receivers)
- 4 = Green (green for QD emitters/receivers)

Emitters—Cabled




Emitters—QD



AC Receivers—Cabled



AC Receivers—QD



Note: AC emitters are not polarity-sensitive when powered by dc voltage. For QD emitters, use a SM30CC model cordset to match cable colors.

*Connect the green wire to earth ground whenever a stainless steel model is powered by ac voltage. (Cabled plastic models have no green wire.)

Key

- 1 = Brown
- 2 = White
- 3 = Blue
- 4 = Black

DC Receivers—NPN



Light Operate


DC Receivers—PNP



Dark Operate



Light Operate

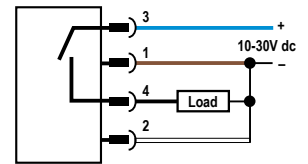

Dark Operate

Cabled wiring diagrams are functionally identical.

Specifications

Supply Voltage and Current

Emitters: 12 to 240V ac (50/60 Hz) or 10-30V dc at 20 mA, 10% maximum ripple
 DC Receivers: 10 to 30V dc at 10 mA maximum (exclusive of load); 10% maximum ripple
 AC Receivers: 24 to 240V ac (50/60 Hz)

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Output Configuration

DC Receivers: Bi-Modal™ output (PNP sourcing or NPN sinking). Selection of light/dark operate and sourcing or sinking configuration dependent on hookup.
 AC Receivers: SPST solid-state switch; light operate (LO) or dark operate (DO) dependent on model.

Output Rating

DC Receivers: 250 mA continuous
 Output saturation voltage (PNP & NPN configuration) < 1 volt at 10 mA and < 2 volts at 250 mA
 Off-state leakage current < 10 microamps
 AC Receivers: Maximum steady-state load capability is 500 mA
 Inrush capability: 10 amps for 1 second (non-repeating)
 Off-state leakage: current < 1.7 mA rms
 On-state voltage drop: < 3.5 volts rms across a 500 mA load; < 5 volts rms across a 15 mA load

Output Protection Circuitry

Outputs of dc receivers are short circuit protected

Output Response Time

10 milliseconds on/off

Repeatability

"A" frequency models: 1 ms
 "B" frequency models: 1.5 ms
 "C" frequency models: 2.3 ms

Indicators

Internal red LED, visible through the lens or from side of the sensor.
 Emitters: Red "Power ON" indicator LED
 DC Receivers: Lights whenever receiver sees its modulated light source
 AC Receivers: Lights whenever receiver's output is conducting

Construction

Fully epoxy-encapsulated tubular threaded housing, positive sealed at both ends, quad-ring sealed acrylic lens.
 Plastic models: 30 mm diameter thermoplastic polyester housing and jam nuts.
 Stainless Steel models: 30 mm diameter 303 stainless steel housing and jam nuts.

Environmental Rating

Exceeds NEMA 6P and IEC IP67

Connections

PVC-jacketed 2 m or 9 m cables or Mini-style quick-disconnect (QD) fitting are available. QD cables are ordered separately.

Operating Conditions

Temperature: -40 °C to +70 °C (-40 °F to +158 °F)
 90% at +50 °C maximum relative humidity (non-condensing)

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.
 Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.
 Supply wiring leads < 24 AWG shall not be spliced.
 For additional product support, go to www.bannerengineering.com.

| Supply Wiring (AWG) | Required Overcurrent Protection (Amps) |
|---------------------|--|
| 20 | 5.0 |
| 22 | 3.0 |
| 24 | 2.0 |
| 26 | 1.0 |
| 28 | 0.8 |
| 30 | 0.5 |


Certifications



Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise.


Cabled Models

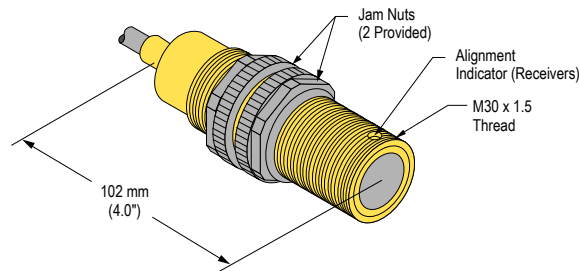

QD Models



Performance Curves

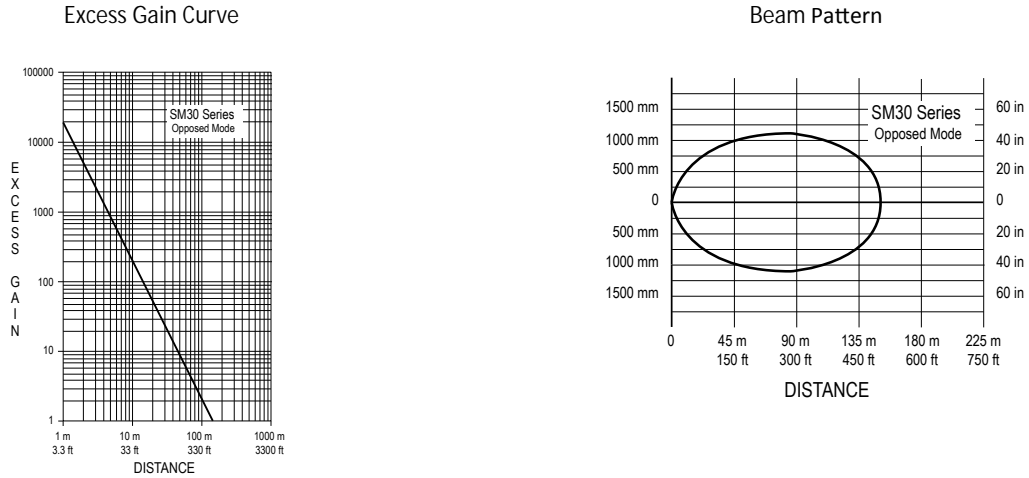

Accessories

Cordsets

| 3-Pin Mini-Style Cordsets | | | | |
|---------------------------|----------------|----------|------------|--|
| Model | Length | Style | Dimensions | Pinout (Female) |
| SM30CC-306 | 1.83 m (6 ft) | Straight | | <p>1 = Red/Black 3 = Red/White 4 = Green</p> |
| SM30CC-312 | 3.66 m (12 ft) | | | |

| 4-Pin Mini-Style Cordsets | | | | |
|---------------------------|----------------|----------|------------|---|
| Model | Length | Style | Dimensions | Pinout (Female) |
| MBCC-406 | 1.83 m (6 ft) | Straight | | <p>1 = Brown 2 = White 3 = Blue 4 = Black</p> |
| MBCC-412 | 3.66 m (12 ft) | | | |
| MBCC-430 | 9.14 m (30 ft) | | | |

Apertures

APG30S

Kit includes round apertures of 0.05 in, 0.12 in, and 0.70 in diameter; slotted widths of 1 mm (0.04 in), 0.10 in and 0.20 in.

Used with SM30 and SMI30 models.

