

Kyocera Part Number : KDA-0700B-18052S-A

Kyocera's Optical Bonding technology eliminates the air gap found in standard tape bonded applications thus reducing internal reflection by up to 70%, dramatically enhancing front-of-screen performance in contrast, clarity and color saturation. Optical Bonding also improves shock resistance.

Kyocera in-house Optical Bond provides high quality, fully integrated solutions including factory warranty and many options to customize for your requirements.

Solution Overview:

T-55785GD070J-LW-AGN	Specification
Resolution / Pixel Configuration	800 x 480
Outline Dimensions (W x H x D mm) (module)	169.8(W)×109.7(H)×9.7(D)
Backlight Lifetime (hours)	70,000 hrs (typ.)
Luminance (Cd/m ²)	1000 cd/m ² *before touch panel is applied
Contrast Ratio (CR>10)	750:1
Electrical Interface	LVDS
Viewing Angle (CR ≥ 10)	H: -85 ~85° ; V: -85~85°
Temperature Range	Operating: -30 ~ 80° C; Storage: -30 ~ 80° C

PCAP Touch Screen Performance	Specification
# of touches	5
Controller Interface	USB or I2C
Controller	External
Cover Glass	1.1mm, Clear

Additional design accessories and tools available on second page.


For more information call 734-416-8500 or visit our website at www.kyocera-display.com

Kyocera International, Inc. Display Division

46723 Five Mile Road, Plymouth, MI 48170 TEL: 734-416-8500 FAX: 734-416-8520



Mechanical Overview:

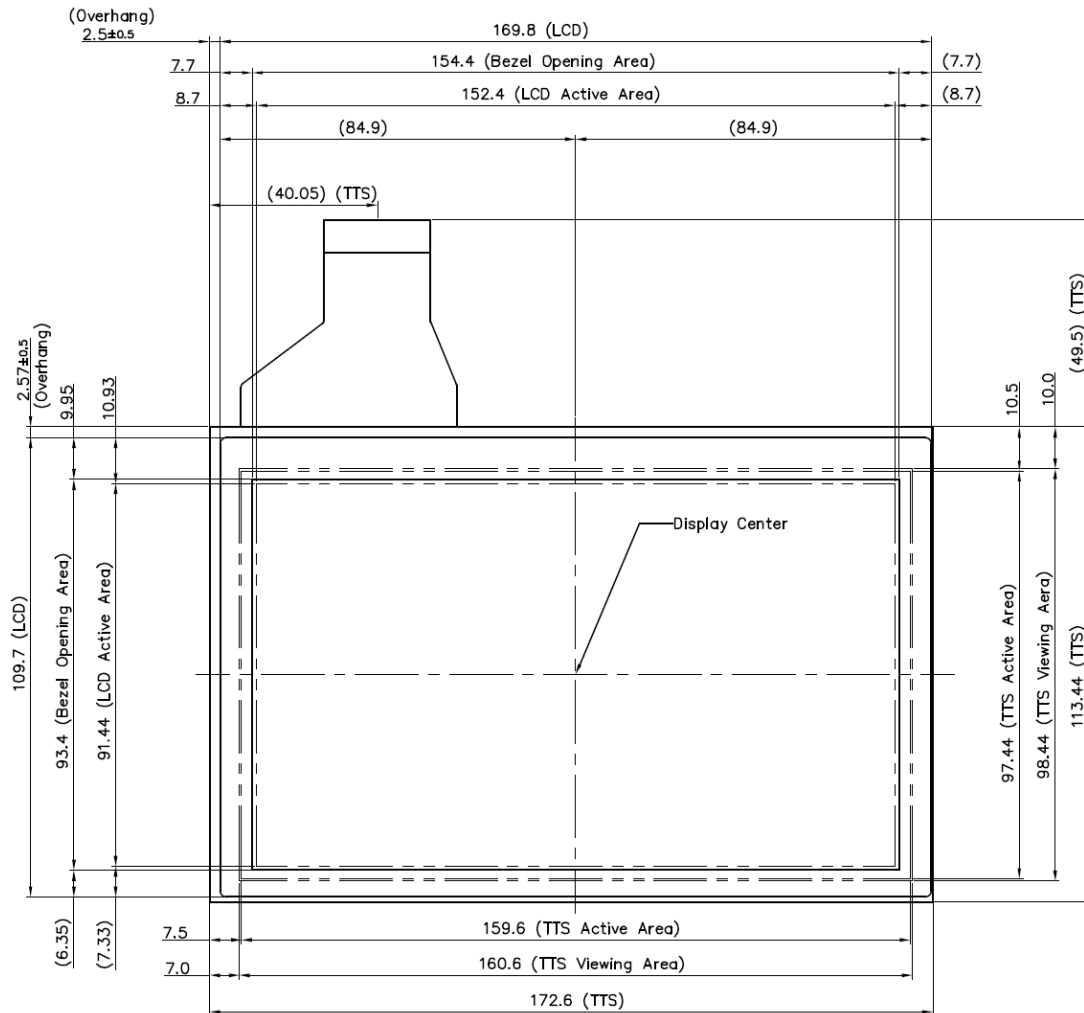

Design Accessories : Kyocera offers the following development solutions to support your complete design requirements.

Part Numbers	Description
KDA-0700B-18052S-A	7.0" WXGA Display + OB+ PCAP+Controller
TKL070WOB-18052-A	KDA-0700B-18052S-A + graphic driver board + VGA & DVI Interface Cables and Power Supply
OAI-80038AA-2008-A	Single cable solution, LVDS and Backlight cable available separately

Kyocera provides full factory warranty.

For more information call 734-416-8500 or visit our website at www.kyocera-display.com