


FAST AND COMPACT

conga-TC175




- 7th Generation Intel® Core™ SOC processor
- Intel® Gen9 HD Graphics with HEVC (H.265) support
- Intel® Optane™ memory can be connected via PCI Express Gen 3.0
- Low power consumption (TDP 15W, cTDP 7.5W)
- Up to 32 GByte dual channel DDR4 memory
- COM Express Compact Type 6 module 95x95 mm²

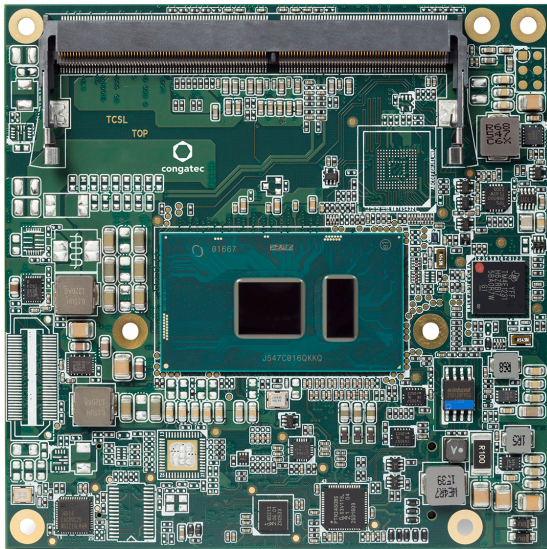

Formfactor	COM Express® Compact, (95 x 95 mm), Type 6 Connector Pinout							
CPU	Intel® Core™ i7-7600U	3.9 GHz (Burst) 2.8 GHz Clock	Dual Core	4MB cache	15W TDP	7.5W cTDP#	Intel® HD Graphics 620	
	Intel® Core™ i5-7300U	3.5 GHz (Burst) 2.6 GHz Clock	Dual Core	3MB cache	15W TDP	7.5W cTDP	Intel® HD Graphics 620	
	Intel® Core™ i3-7100U	2.4 GHz Clock	Dual Core	3MB cache	15W TDP	7.5W cTDP	Intel® HD Graphics 620	
	Intel® Celeron® 3965U	2.2 GHz Clock	Dual Core	2MB cache	15W TDP	10W cTDP	Intel® HD Graphics 610	
	Intel® Turbo Boost Technology Intel® Hyper-Threading Technology (HT) Intel® Advanced Vector Extensions 2.0 (AVX2) Intel® Advanced Encryption Standard New Instructions (AES-NI) Integrated dual channel memory controller up to 34,1 GByte/sec. memory bandwidth Integrated Intel® Gen9 HD Graphics with frequency up to 1.05 GHz Intel® Clear Video HD Technology Intel® Virtualization Technology (VT) Intel® Trusted Execution Technology (TXT) Intel® Secure Key							
DRAM	2 Sockets, SO-DIMM DDR4 up to 2133 MT/s and 32 GByte dual channel							
Chipset	Integrated PCH-LP							
Ethernet	Intel® i219-LM GbE LAN Controller with AMT 11.6 support							
I/O Interfaces	8x PCI Express GEN. 3.0 lanes 3x Serial ATA® Gen 3 (can be configured as RAID) 4x USB 3.0 (XHCI) 8x USB 2.0 (XHCI) LPC bus (no DMA) I²C bus (fast mode, 400 kHz, multi-master) 2x UART							
Sound	Digital High Definition Audio Interface with support for multiple audio codecs							
Graphics	Intel® Gen9 HD Graphics Engine with OpenCL 2.1, OpenGL 5.0 and DirectX12 (for Windows 10) support up to three independent displays High performance hardware MPEG-2 decoding WMV9 (VC-1) and H.265 (HEVC) support Blu-ray support @ 40 MBit/s HEVC, VP9 and VDENC encoding							
LVDS (eDP optional)	Dual channel LVDS transmitter, Supports flat panels 2x24 Bit interface VESA and openLDI colour mappings resolutions up to 1920x1200 Automatic Panel Detection via EDID/EPI							
Digital Display Interface (DDI)	2x DDI (TMDS / DisplayPort 1.2) with support for Multi-Stream Transport (MST) resolutions up to 4k VGA (optional)							
congatec Board Controller	Multi Stage Watchdog non-volatile User Data Storage Manufacturing and Board Information Board Statistics BIOS Setup Data Backup I²C bus (fast mode, 400 kHz, multi-master) Power Loss Control							
Embedded BIOS Features	AMI Aptio® UEFI 2.x firmware 8/16 MByte serial SPI firmware flash							
Security	The conga-TC175 can be optionally equipped with a discrete "Trusted Platform Module" (TPM 1.2 / 2.0). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.							
Power Management	ACPI 4.0 with battery support							
Operating Systems	Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Linux							
Power Consumption	See User's Guide for full details							
Temperature	Operating: 0 .. +60°C Storage: -40 .. +85°C							
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.							
Size	95 x 95 mm (3.74" x 3.74")							

conga-TC175 | Block diagram

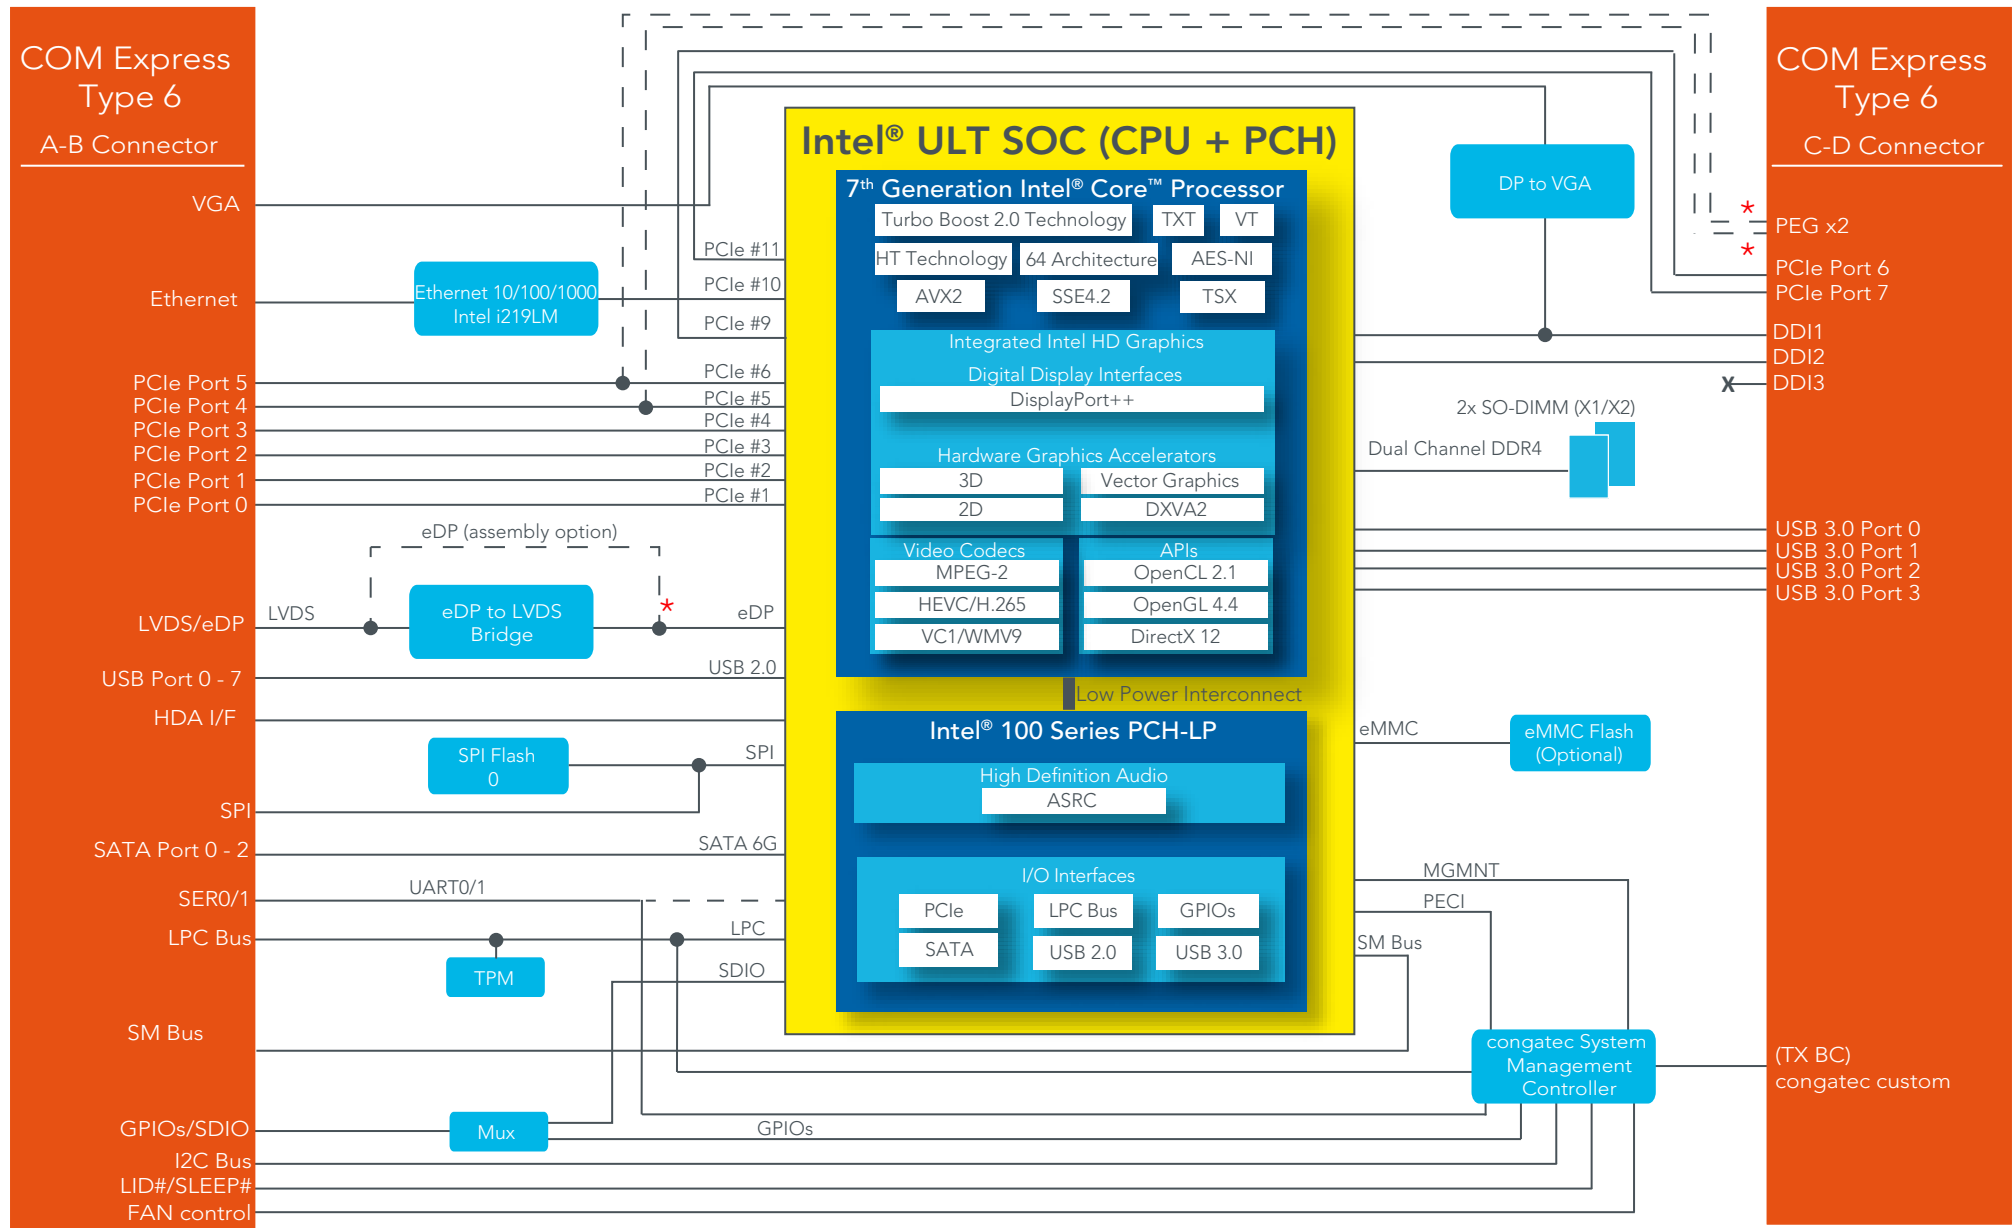

Note:

* Not supported by default. Only available as assembly option.